


- 1) Pass fixture wire through hole in bottom of long tube. Set long tube down over coupling on top of fixture body.
- 2) Pass fixture wire through end of threaded pipe without coupling. Lower end of threaded pipe without coupling down into long tube. Thread that end of threaded pipe into coupling on top of fixture body.
- 3) Pass wire from coupling on top of long tube through stem and screw stem into coupling.
- NOTE: Thread locking compound must be applied to all stem threads as noted with symbol () to prevent accidental rotation of fixture during cleaning, relamping, etc.
- 4) Pass fixture wire through remaining stems and screw stems together.
- 5) Pass fixture wire from last stem through hole in swivel on canopy. Carefully pull wires up through canopy.
- NOTE DIRECTION OF SWIVEL IN ACCORDANCE WITH CEILING.
- 6) TURN OFF POWER.
- IMPORTANT: Before you start, NEVER attempt any work without shutting off the electricity until the work is done.

a) Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the “OFF” position.

b) Unscrew the fuse(s), or switch “OFF” the circuit breaker switch(s), that control the power to the fixture or room that you are working on.

c) Place the wall switch in the “OFF” position. If the fixture to be replaced has a switch or pull chain, place those in the “OFF” position.
- 7) Find the appropriate threaded holes on mounting strap. Assemble mounting screws into threaded holes.
- 8) Attach mounting strap to outlet box. (Screws not provided). Mounting strap can be adjusted to suit position of fixture.
- 9) Grounding instructions: (See Illus. A or B).
- A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.


B) On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.
- If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector. (Not provided.) After following the above steps. Never connect ground wire to black or white power supply wires.

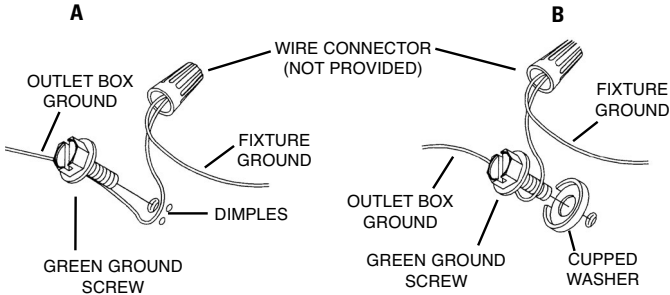

- 10) Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.


Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)




Neutral Wire

- 11) Push fixture to ceiling, carefully passing mounting screws through holes in canopy.
- 12) Screw threaded balls onto mounting screws. Tighten mountins screws to secure fixture to ceiling.
- 13) Screw hexnut onto end of threaded pipe. Thread that end of threaded pipe into coupling on bottom of fixture body.
- 14) Slip short tube over end of threaded pipe.
- 15) Pass hole in check ring over end of threaded pipe protruding from bottom of short tube.
- 16) Slip hole in small flat washer over end of threaded pipe.
- 17) Slip hole in small rubber washer over end of threaded pipe.
- 18) Raise diffuser up to fixture. Pass hole in diffuser over end of threaded pipe.
- 19) Pass hole in large rubber washer over end of threaded pipe protruding from bottom of diffuser.
- 20) Pass hole in large flat washer over end of threaded pipe protruding from bottom of diffuser.
- 21) Screw finial onto end of threaded pipe. (DO NOT over tighten.)


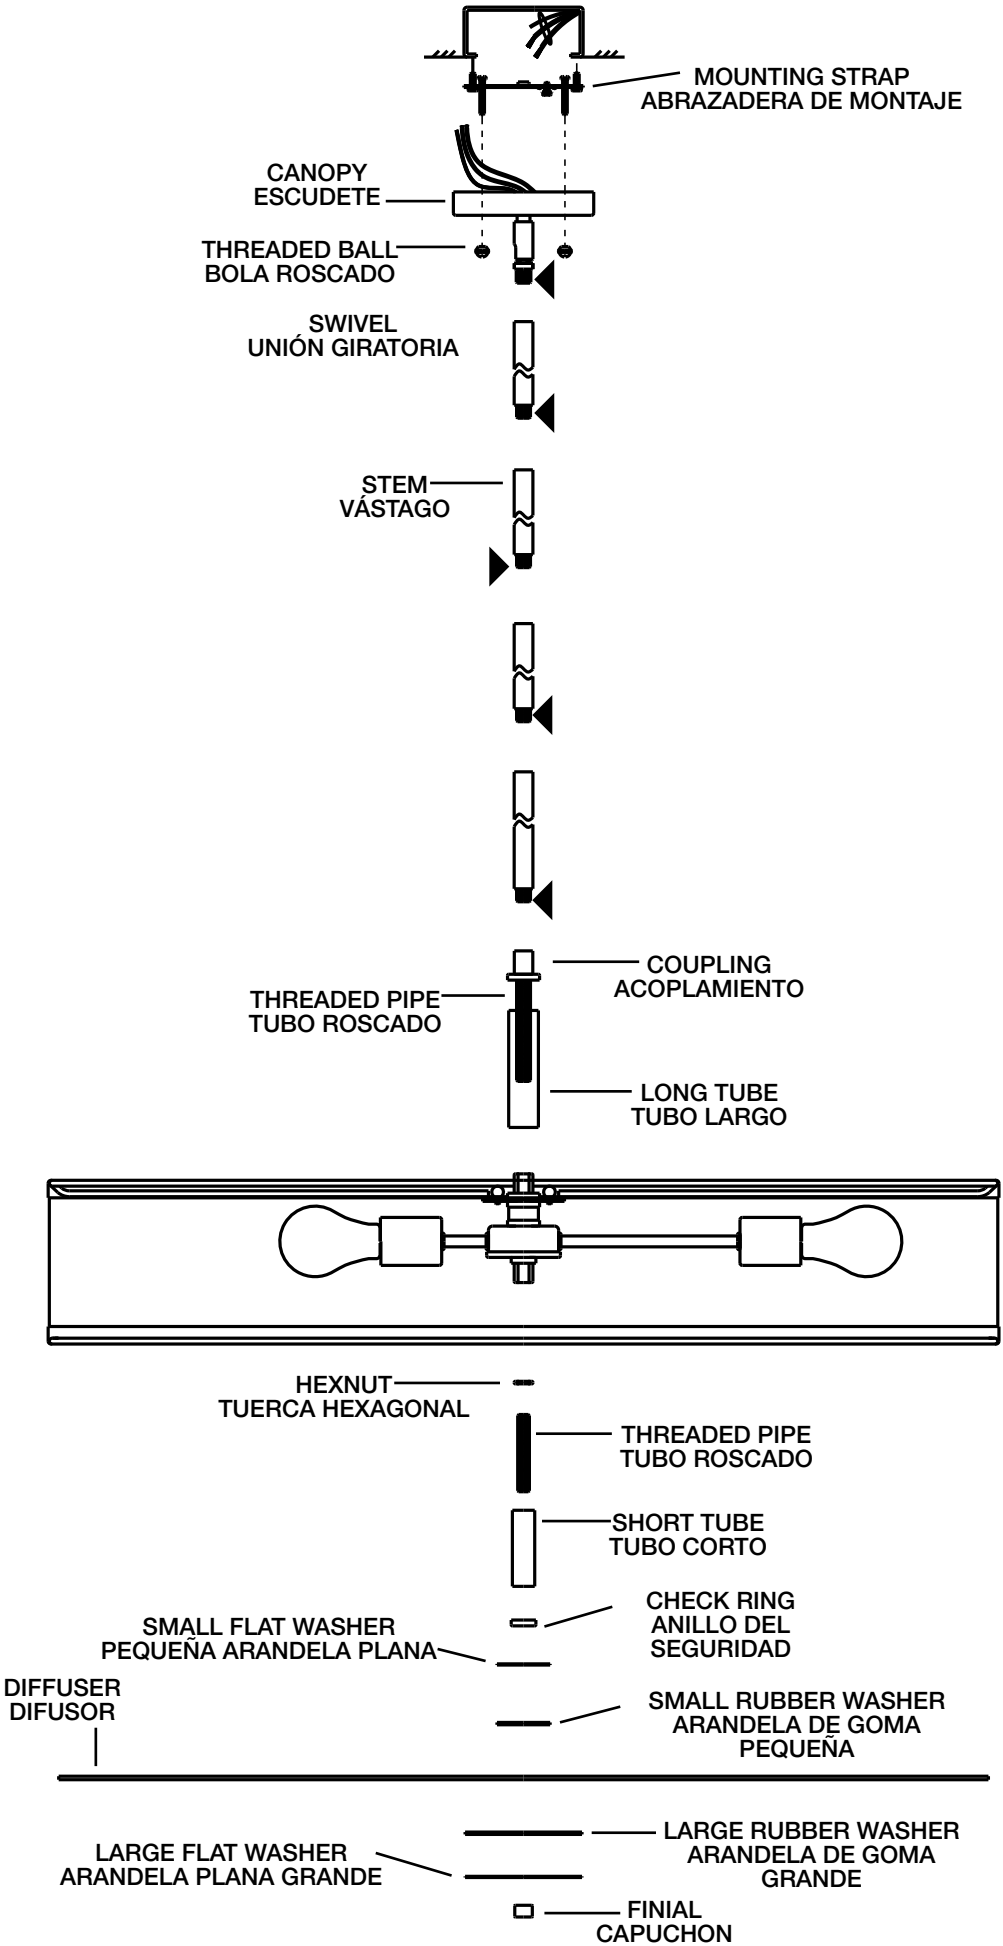


SEE OTHER SIDE FOR SPANISH TRANSLATIONS.
VEA EL OTRO LADO DE TRADUCCIONES AL ESPAÑOL.

- Si la lámpara viene con alambre a tierra. Conectar el alambre a tierra de la lámpara al alambre a tierra de la caja tomacorriente con un conector de alambres (no incluido) espúes de seguir los pasos anteriores. Nunca conectar el alambra a tierra a los alambres eléctricos negro o blanco.



*Nota: Cuando se utiliza alambre paralelo (SPT I y SPT II). El alambre neutro es de forma cuadrada o estriada y el otro alambre será de forma redonda o lisa. (Vea la ilustración).

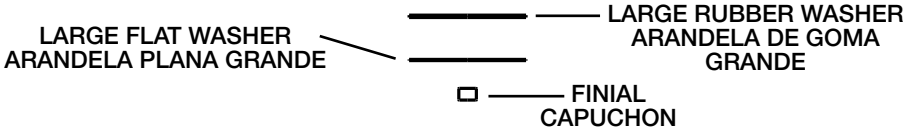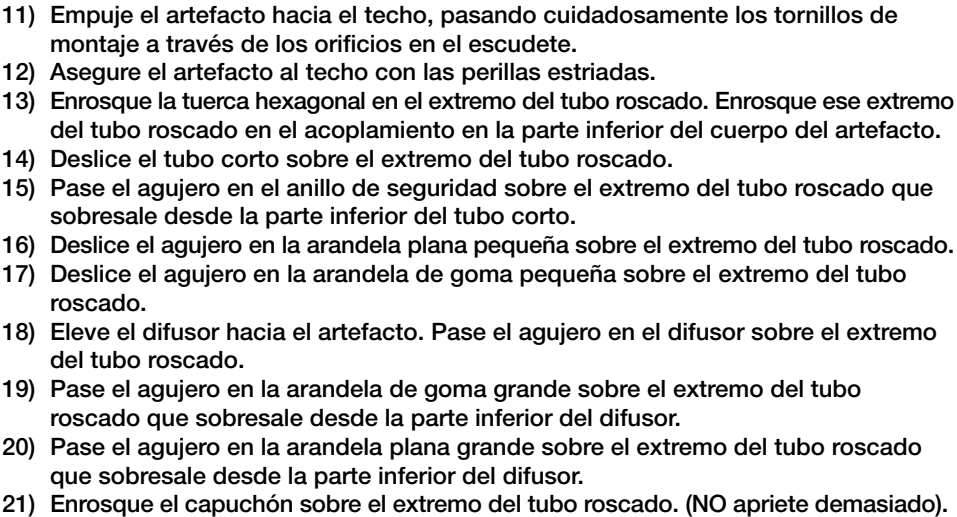

**SEE OTHER SIDE FOR ENGLISH TRANSLATIONS.
VEA EL OTRO LADO DE TRADUCCIONES AL INGLÉS.**