


LOOP/CHAIN LINK/LOOP MOUNT

- 1) Pass wire from fixture through stem and screw stem to top of fixture. **NOTE:** Thread locking compound must be applied to all stem threads as noted with symbol (◄) to prevent accidental rotation of fixture during cleaning, relamping, etc.
- 2) Pass fixture wire through remaining stems and screw stems together.
- 3) Thread one small threaded pipe into end of each small loop.
- 4) On each side of fixture, pass fixture wire from last stem through first loop. Thread each first loop onto end of each last stem.
- 5) On each side of fixture, pass fixture wire through each small loop on canopy and through hole in canopy.
- 6) Attach one chain link to small loop at end of each stem and to each small oop on canopy.
- 7) **TURN OFF POWER.**
IMPORTANT: Before you start, NEVER attempt any work without shutting off the electricity until the work is done.
 - a) Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the “OFF” position.
 - b) Unscrew the fuse(s), or switch “OFF” the circuit breaker switch(s), that control the power to the fixture or room that you are working on.
 - c) Place the wall switch in the “OFF” position. If the fixture to be replaced has a switch or pull chain, place those in the “OFF” position.
- 8) Thread hexnut onto threaded pipe so that 5 threads are exposed above hexnut. Thread that end of the threaded pipe into mounting strap and tighten hexnut against mounting strap. Screw second hexnut onto end of threaded pipe protruding from back of mounting strap.
- 9) Attach mounting strap to outlet box. (Screws not provided.)
- 10) Grounding instructions: (See Illus. A or B).
 - A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
 - B) On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.


If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector. (Not provided.) After following the above steps. Never connect ground wire to black or white power supply wires.

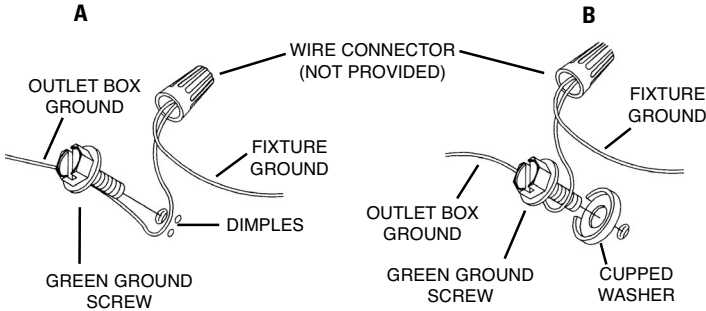

- 11) Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)




- 12) Push fixture to ceiling, carefully passing threaded pipe through hole in canopy.
- 13) Thread finial onto threaded pipe. Tighten finial to secure fixture to ceiling.
- 14) Insert recommended bulb.
- 15) Slip one small rubber washer onto each thumbscrew.
- 16) Raise glass up to fixture. Pass hole in glass over bulb.
- 17) Align holes in side of glass with holes in ring on socket.
- 18) Carefully push end of thumbscrew into hole in glass and thread thumbscrew into hole in side of ring on socket.


RIGID STEM MOUNT

- 1) Remove each small loop from the canopy. **NOTE:** The lockwashers and hexnuts will be used in step 5.
- 2) Remove threaded pipe from each small loop.
- 3) Pass wire through stems and screw stems into each coupling on top of fixture body. **NOTE:** Thread locking compound must be applied to all stem threads as noted with symbol (◄) to prevent accidental rotation of fixture during cleaning, relamping, etc.
- 4) Pass fixture wire through remaining stems and screw stems together.
- 5) On each side of fixture, pass fixture wire through the small threaded pipe removed from each small loop. Thread one small threaded pipe into end of last stem on each side of fixture.
- 6) On each side of fixture, pass fixture wire through each hole in canopy. Lower canopy down towards stems. Pass each hole in canopy over end of threaded pipes on each last stem.
- 7) On each side of fixture, pass fixture wire through hole in one lockwasher. Thread one lockwasher onto each threaded pipe protruding from inside canopy.
- 8) On each side of fixture, pass fixture wire through hole in one hexnut and thread each hexnut onto end of threaded pipe.
- 9) Follow steps 10-18 in Loop/Chain Link/Loop Installation Instructions.

LOOP/CHAIN LINK/LOOP MOUNT
MONTAJE DE LAZO/ESLABÓN DE CADENA/LAZO

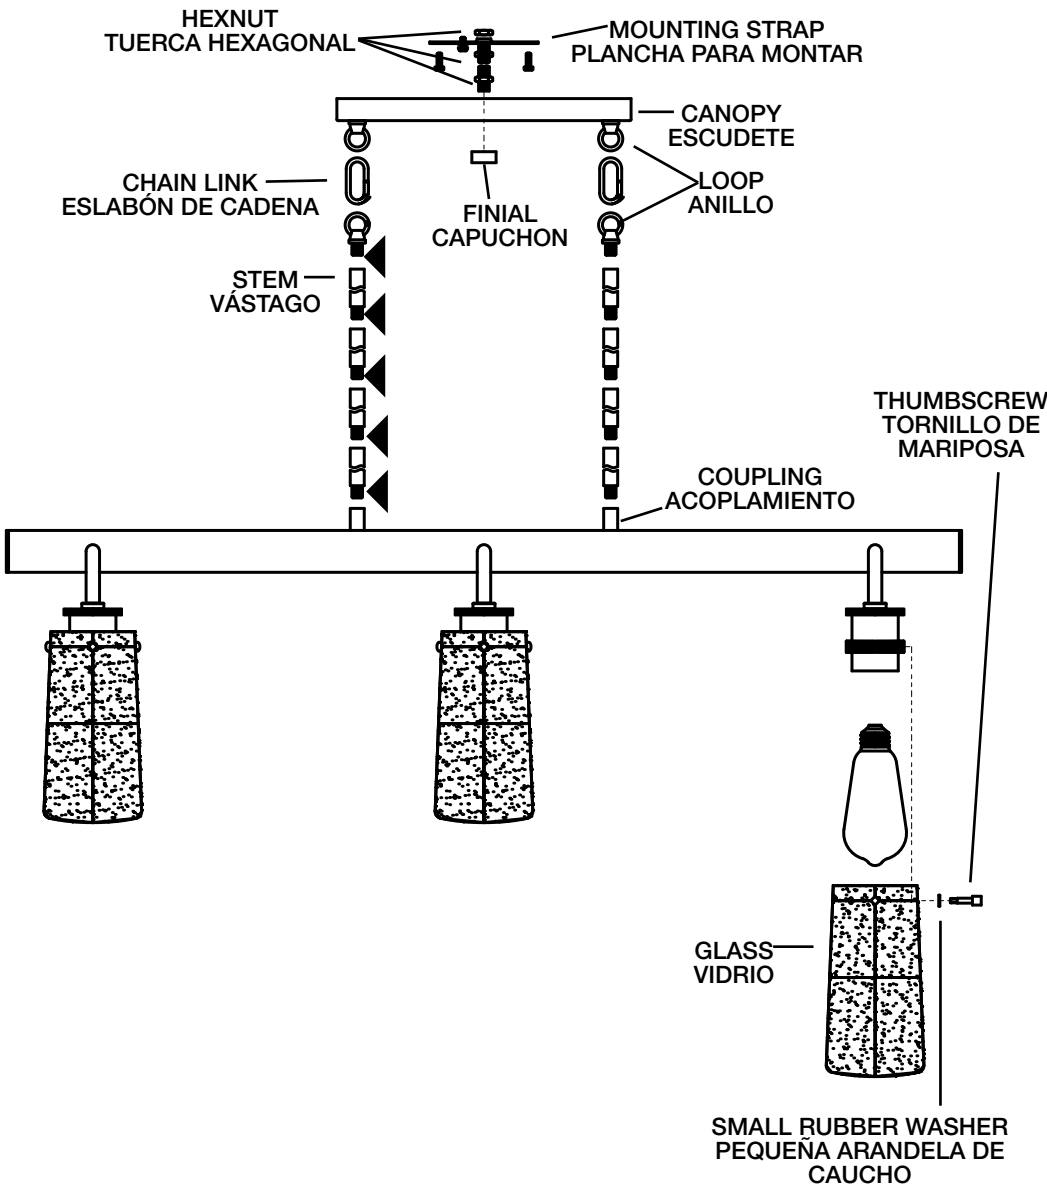

RIGID STEM MOUNT
MONTAJE DEL VÁSTAGO NERVADO

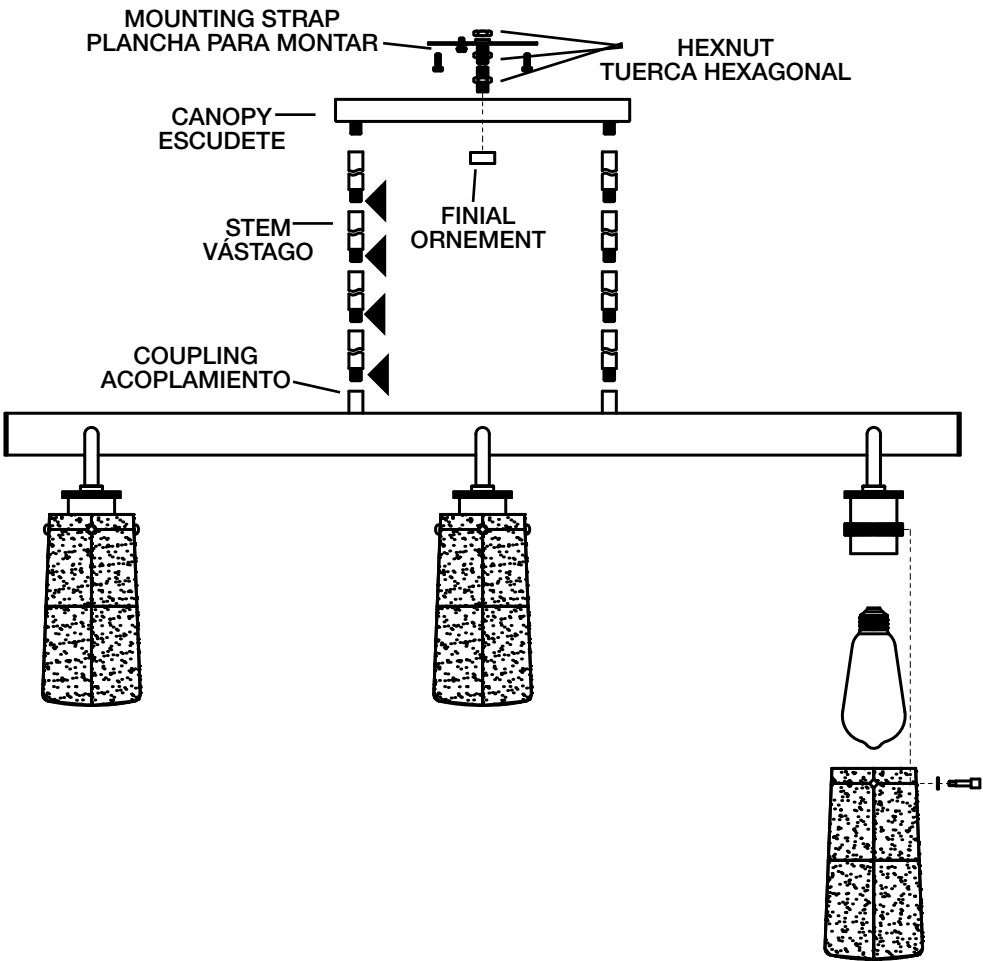

SEE OTHER SIDE FOR SPANISH TRANSLATIONS.
VEA EL OTRO LADO DE TRADUCCIONES AL ESPAÑOL.

