


IMPORTANT SAFETY INSTRUCTIONS
LIGHTED BULB IS HOT!

- WARNING:** To reduce the risk of FIRE or INJURY TO PERSON:
- Turn off and allow to cool before replacing bulb.
 - Bulb gets HOT QUICKLY! Contact switch only when turning off.
 - DO NOT remain in light if skin feels warm. (Light is intense, may cause “sunburn”)
 - DO NOT look directly at lighted bulb.
 - Keep materials away from bulb that may burn.
 - Use ONLY with wattage specified or lower.
 - DO NOT touch bulb at any time, use a soft cloth. Oil from skin may damage bulb.
 - DO NOT operate fixture with missing or damaged glass.

- 1) Turn off power.
- 2) Attach backpan to outlet box. (Screws not provided).
- 3) Grounding instructions: (See Illus. A or B).
 - A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
 - B) On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.

If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector. (Not provided.) After following the above steps. Never connect ground wire to black or white power supply wires.

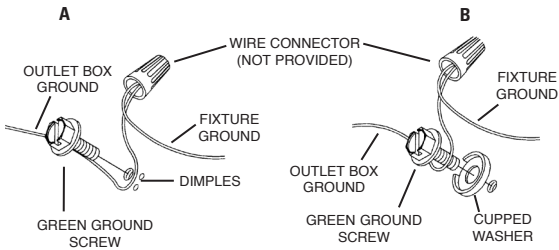

- 4) Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

- 5) Push fixture to wall, aligning holes on top of fixture with holes on top edge of backpan.
- 6) Attach fixture to backpan with screws.
- 7) Set glass over socket.
- 8) Slip rubber washer then spacer over socket.
- 9) Screw socket ring onto socket.
- 10) Insert recommended bulb. **CAUTION:** DO NOT touch bulb with bare hands. If this happens, clean bulb with denatured alcohol and a lint free cloth.
- 11) Slip glass sleeve over bulb.