


TaskWork LED Tape Light

24 Volt DC Dry Location RGB

Project:

Location:

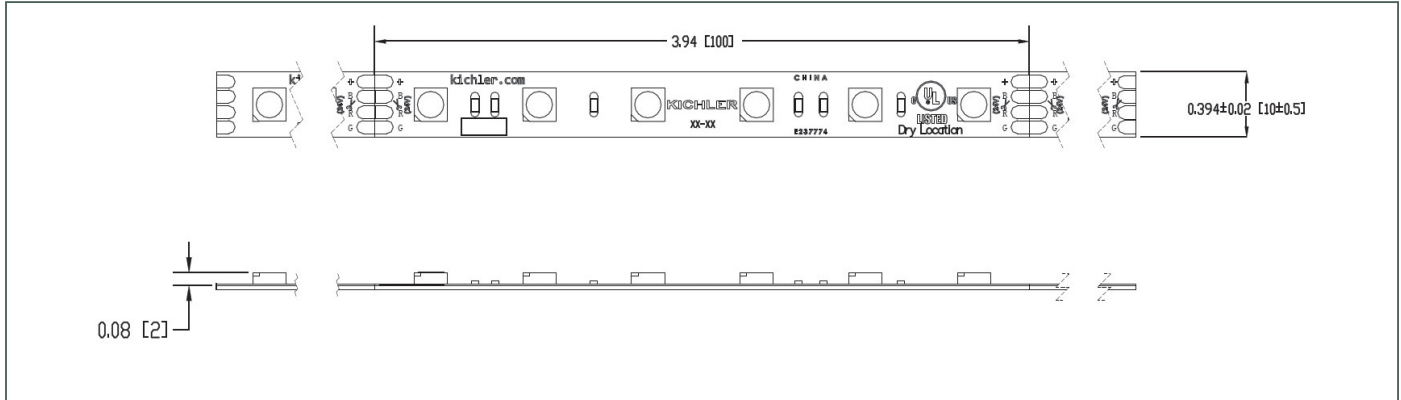

Description	Professional grade 24 volt LED Tape Light
Features	<ul style="list-style-type: none">• Expected life 50,000 hrs at L70• Tape can be cut every 4" and reconnected• 3M™/VHB professional grade adhesive backing for an easy peel-and-stick installation
Construction	Flexible PCB. Cut marks every 4".
Operating Voltage	24V DC
CRI	N/A
Light Source	6 High Powered LED per 4" section
Beam Angle	120°
Operating Temperature	-10°C to +50°C (-30°F to +120°F)
Power Supply	Remote electronic Class 2 transformer. 120VAC 50/60Hz input, 24VDC output.
Certification	FCC compliant, UL & CUL listed. UL 2108 dry location rated, ROHS compliant
Warranty	5 year warranty. See www.Kichler.com for full warranty information


TaskWork LED Tape Light

24 Volt DC Dry Location RGB

Color Changing RGB (Red, Green & Blue)



Description	High Output RGB Tape Light
Features	<ul style="list-style-type: none"> • 20' Max Run Length • 4 Watts / Ft. • Must be used with 10199 RGB Controller
Item	120RGB WH, BK 20' (80W)

Select Accessories

RGB Controller	10199 BK <ul style="list-style-type: none"> • Must be used with RGB tape light • Touch controller • Multiple modes for unique light settings • Adjusts speed and brightness • Connects between power supply and tape light • Can only be used with electronic power supplies 
Track Section	12330, WH, BK (10 pack) <ul style="list-style-type: none"> • 3' track section • Snaps on the score every 6" • Captive screws every 6" 

Select Power Supply Leads & Interconnect Cables

RGB Power Supply Leads	1SL1RGB WH, BK 1' Supply Lead 1SL2RGB WH, BK 2' Supply Lead 1SL8RGB WH, BK 8' Supply Lead 1SL25RGB WH, BK 25' Supply Lead <ul style="list-style-type: none"> • Connects tape light to power supply • Cannot be used as an interconnect cable 
Inline Splice	1C1RGB WH, BK <ul style="list-style-type: none"> • Connects two sections of tape together 

3-Way Connector	1C3RGB WH, BK <ul style="list-style-type: none"> • Connects 3 sections of tape together. • Ideal for making "T" or "Y" connections. • One input, two outputs. • 6.25" x 3.50" • Connects to tape light only. Does not connect to power supply 
4-Way Connector	1C4RGB WH, BK <ul style="list-style-type: none"> • Connects 4 sections of tape together. • One input, three outputs. • 6.25" x 6.25" • Connects to tape light only. Does not connect to power supply 

TaskWork LED Tape Light

24 Volt DC Dry Location RGB

Select Power Supply Leads & Interconnect Cables, continued

Interconnect Cables

1IC02RGB WH, BK 2" Interconnect 90°

- Used as a "jumper" wire to connect 2 sections of tape light together.
- Flexible connector that is ideal making tight turns.



1IC12RGB WH, BK 12" Interconnect

1IC36RGB WH, BK 36" Interconnect

1IC52RGB WH, BK 52" Interconnect

1IC96RGB WH, BK 96" Interconnect



Select Indoor Damp Power Supply

Total wattage of tape light cannot exceed wattage rating of power supply.

Plug-in Power Supply

10190BK30 30W

10190BK48 48W

10190BK60 60W

- 8' of cord with male DC 2.1 jack on end
- Class 2/24V DC
- 2.4W minimum load requirement



Direct Wire Power Supply

10191BK60 60W Direct Wire Power Supply

- 9.5" L x 3" W x 1.38" H
- Class 2/24V DC
- Includes 6' cord with male DC 2.1 jack on output side
- Includes push-in wire connectors on 120V input side
- No minimum load requirement



10191BK96 96W Direct Wire Power Supply

- 11.5" L x 3" W x 1.38" H
- Class 2/24V DC
- Includes 6' cord with male DC 2.1 jack on output side
- Includes push-in wire connectors on 120V input side
- No minimum load requirement



KICHLER LIGHTING

World Headquarters
7711 E. Pleasant Valley Rd.
PO Box 318010
Cleveland, Ohio 44131-8010
www.kichler.com

© Copyright All rights reserved
Kichler Lighting

style to live by™

KICHLER