


TaskWork LED Tape Light

24 Volt DC Damp Location White & Single Colors

Project:

Location:

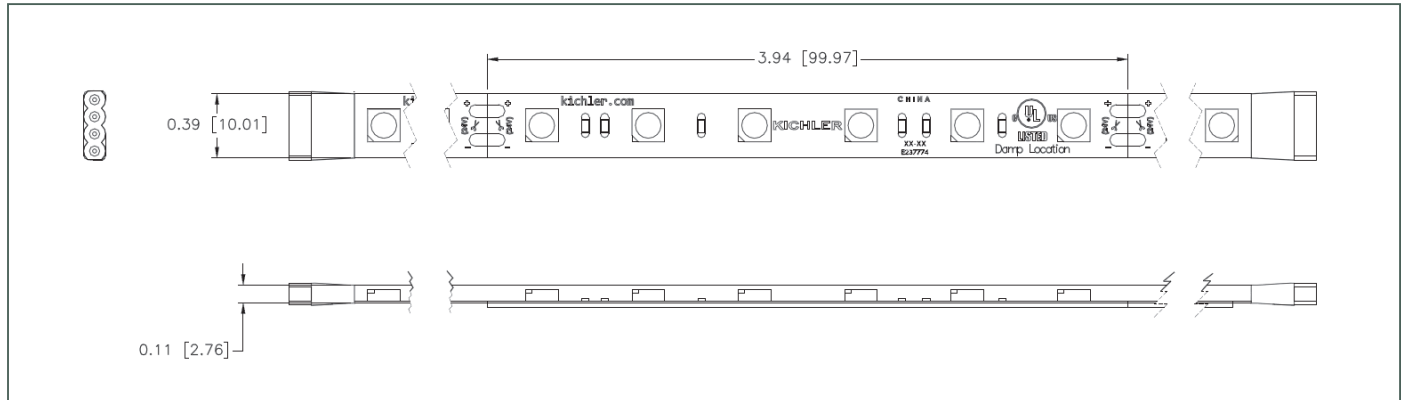

Description	Professional grade 24 volt LED Tape Light
Features	<ul style="list-style-type: none"> • Expected life 50,000 hrs at L70 • Fully dimmable when used with dimmable power supply • Sections can connect together end-to-end or be used individually • Tape can be cut every 4" at the end of a run • Once tape has been cut, the excess cannot be reused • 3M™/VHB professional grade adhesive backing for an easy peel-and-stick installation • Clear silicone coating for added protection against moisture
Operating Voltage	24V DC
CRI	80+ (white only)
Light Source	6 High Powered LED per 4" section
Beam Angle	120°
Operating Temperature	-10°C to +50°C (-30°F to +120°F)
Power Supply	Remote electronic or magnetic damp location Class 2 transformer. 120VAC 50/60Hz input, 24VDC output.
Certification	FCC compliant, UL & CUL listed. UL 2108 damp location rated, ROHS compliant, IP65 Rated
Warranty	5 year warranty. See www.Kichler.com for full warranty information.

TaskWork LED Tape Light

24 Volt DC Damp Location White & Single Colors

White: Select Color Temperature & Lumen Output

Description	Low Output			
Features	<ul style="list-style-type: none"> • 32.8' Max Run Length • 100 Lumens / Ft. • 1.45 Watts / Ft. • 80 CRI 			
Pure White 3200K	216L32 WH, BK	16'	(24W)	
	25L32 WH, BK	5'	(7.25W)	
	21L32 WH, BK	12"	(1.45W)	
	204L32 WH, BK	4"	(.48W)	
Cool White 3600K	216L36 WH, BK	16'	(24W)	
	25L36 WH, BK	5'	(7.25W)	
	21L36 WH, BK	12"	(1.45W)	
	204L36 WH, BK	4"	(.48W)	

Description	High Output			
Features	<ul style="list-style-type: none"> • 20' Max Run Length • 200 Lumens / Ft. • 4 Watts / Ft. • 80 CRI 			
Pure White 3200K	220H32 WH, BK	20'	(80W)	
	25H32 WH, BK	5'	(20W)	
	21H32 WH, BK	12"	(4W)	
	204H32 WH, BK	4"	(1.3W)	
Cool White 3600K	220H36 WH, BK	20'	(80W)	
	25H36 WH, BK	5'	(20W)	
	21H36 WH, BK	12"	(4W)	
	204H36 WH, BK	4"	(1.3W)	

Colors: Select Color (Red, Blue, Green or Yellow) & Intensity




Description	Low Output			
Features	<ul style="list-style-type: none"> • 32.8' Max Run Length • 1.45 Watts / Ft. 			
Red LED Tape 630 nm	216LR WH, BK	16'	(24W)	
	25LR WH, BK	5'	(7.25W)	
	21LR WH, BK	12"	(1.45W)	
	204LR WH, BK	4"	(.48W)	
Green LED Tape 515 nm	216LG WH, BK	16'	(24W)	
	25LG WH, BK	5'	(7.25W)	
	21LG WH, BK	12"	(1.45W)	
	204LG WH, BK	4"	(.48W)	
Blue LED Tape 465 nm	216LB WH, BK	16'	(24W)	
	25LB WH, BK	5'	(7.25W)	
	21LB WH, BK	12"	(1.45W)	
	204LB WH, BK	4"	(.48W)	
Yellow LED Tape 595 nm	216LY WH, BK	16'	(24W)	
	25LY WH, BK	5'	(7.25W)	
	21LY WH, BK	12"	(1.45W)	
	204LY WH, BK	4"	(.48W)	

Description	High Output			
Features	<ul style="list-style-type: none"> • 20' Max Run Length • 4 Watts / Ft. 			
Red LED Tape 630 nm	220HR WH, BK	20'	(80W)	
	25HR WH, BK	5'	(20W)	
	21HR WH, BK	12"	(4W)	
	204HR WH, BK	4"	(1.3W)	
Green LED Tape 515 nm	220HG WH, BK	20'	(80W)	
	25HG WH, BK	5'	(20W)	
	21HG WH, BK	12"	(4W)	
	204HG WH, BK	4"	(1.3W)	
Blue LED Tape 465 nm	220HB WH, BK	20'	(80W)	
	25HB WH, BK	5'	(20W)	
	21HB WH, BK	12"	(4W)	
	204HB WH, BK	4"	(1.3W)	
Yellow LED Tape 595 nm	220HY WH, BK	20'	(80W)	
	25HY WH, BK	5'	(20W)	
	21HY WH, BK	12"	(4W)	
	204HY WH, BK	4"	(1.3W)	




TaskWork LED Tape Light




24 Volt DC Damp Location White & Single Colors

Select Accessories

End Cap	10181 (10 pack) <ul style="list-style-type: none"> Caps the end of a cut piece of tape 
Silicone	10183 
3' Track Section	12330 WH, BK (10-pack) <ul style="list-style-type: none"> 3' track section Snaps on the score every 6" Captive screws every 6" White or Black finish 

Select Power Supply Leads & Interconnect Cables

Power Supply Leads	2SL1 WH, BK 1' Supply Lead 2SL2 WH, BK 2' Supply Lead 2SL8 WH, BK 8' Supply Lead 2SL25 WH, BK 25' Supply Lead <ul style="list-style-type: none"> Connects tape light to power supply Cannot be used as an interconnect cable 
Inline Splice	2C1 WH, BK (5 pack) <ul style="list-style-type: none"> Connects two sections of tape together One supplied with each section of tape light 
3-Way Connector	2C3 WH, BK <ul style="list-style-type: none"> Ideal for making "T" or "Y" connections. One input, two outputs. 6.25" x 3.50" Connects directly to tape light, interconnects or supply leads 





4-Way Connector	2C4 WH, BK <ul style="list-style-type: none"> One input, three outputs. 6.25" x 6.25" Connects directly to tape light, interconnects or supply leads 
Interconnect Cables	2IC02 WH, BK 2" Interconnect 90° <ul style="list-style-type: none"> Used to connect 2 sections together, or as a corner connector. Flexible connector that is ideal making tight turns.  2IC12 WH, BK 12" Interconnect 2IC36 WH, BK 36" Interconnect 2IC52 WH, BK 52" Interconnect 2IC96 WH, BK 96" Interconnect <ul style="list-style-type: none"> Connects directly to tape light, interconnects or supply leads 

TaskWork LED Tape Light

24 Volt DC Damp Location White & Single Colors

Select Damp Location Power Supply

Total wattage of tape light cannot exceed wattage rating of power supply.

Direct Wire Power Supply	<p>10191BK60 60W</p> <ul style="list-style-type: none">• 9.5" L x 3" W x 1.38" H• Includes 6' cord with male DC 2.1 jack on output side• DC jack connects directly to power supply lead• Includes push-in wire connectors on 120V input side• No minimum load requirement 	Dimmable Direct Wire Power Supply	<p>10192BK60 60W</p> <p>10192BK96 96W</p> <ul style="list-style-type: none">• 6.5" L x 2.5" W x 2.25" H• Rated for both indoor dry and damp locations• Dimmable with low voltage magnetic dimmer• 5W minimum load requirement• Compatible with Lutron & Leviton low-voltage magnetic analog dimmers• No DC jack on output. Power supply lead must be hardwired. 
	<p>10191BK96 96W Direct Wire Power Supply</p> <ul style="list-style-type: none">• 11.5" L x 3" W x 1.38" H• Includes 6' cord with male DC 2.1 jack on output side• DC jack connects directly to power supply lead• Includes push-in wire connectors on 120V input side• No minimum load requirement 	Cord & Plug Accessory	<p>10193BK</p> <ul style="list-style-type: none">• 8' cord & plug accessory for use with 10192BK60 Direct Wire Dimmable and 10192BK96 Direct Wire Dimmable 

KICHLER LIGHTING
World Headquarters
7711 E. Pleasant Valley Rd.
PO Box 318010
Cleveland, Ohio 44131-8010
www.kichler.com

© Copyright All rights reserved
Kichler Lighting