


TaskWork LED Tape Light

24 Volt DC Wet Location RGB

Project:

Location:

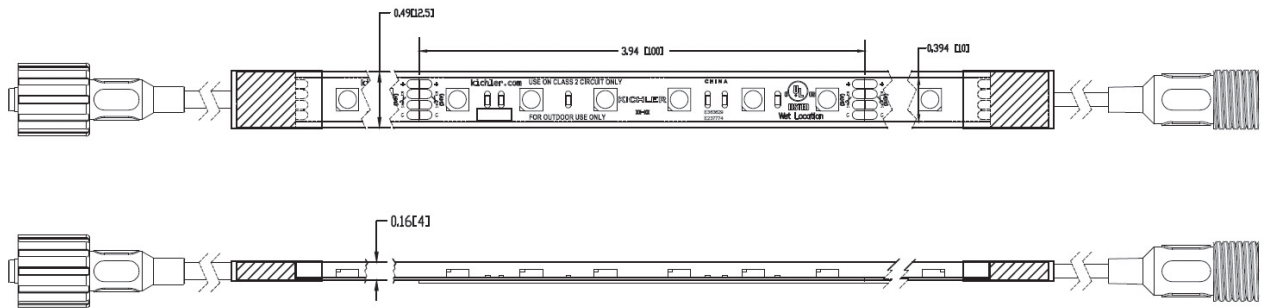

Description	Professional grade 24 volt High Output LED Tape Light
Features	<ul style="list-style-type: none">• Expected life 50,000 hrs• Sections can connect together end-to-end or be used individually• Tape can be cut every 4" at the end of a run• Once tape has been cut, the excess cannot be reused• 3M™/VHB professional grade adhesive backing for an easy peel-and-stick installation
Construction	Flexible, epoxy and silicone sealed. Tape is clearly marked where it is cuttable every 4".
Operating Voltage	24V DC
CRI	N/A
Light Source	6 High Powered LED per 4" section
Beam Angle	120°
Operating Temperature	-10°C to +50°C (-30°F to +120°F)
Power Supply	Remote electronic Class 2 transformer. 120VAC 50/60Hz input, 24VDC output.
Certification	FCC compliant, UL & CUL listed. UL 2108 and UL 1838 wet location rated, ROHS compliant, IP67 Rated
Warranty	5 year warranty. See www.landscapelighting.com or www.Kichler.com for full warranty information





TaskWork LED Tape Light

24 Volt DC Wet Location RGB

Color Changing RGB (Red, Green & Blue)

Description	High Output		
Features	<ul style="list-style-type: none"> • 20' Max Run Length • 4 Watts / Ft. 		
RGB LED Tape	320RGB WH, BK	20'	(80W)
	310RGB WH, BK	10'	(40W)
	34RGB WH, BK	4"	(16W)
	31RGB WH, BK	12"	(4W)

Select Accessories




LED Tape 10MM Mounting Clip	10180 <ul style="list-style-type: none"> • Flexible mounting clip • Use as extra support for outdoor tape 
End Cap	10182 <ul style="list-style-type: none"> • Caps the end of a cut piece of tape 
Silicone	10183 <ul style="list-style-type: none"> • Use with 10182 for a water tight seal 
LED Tape IP67 Terminator Cap	10184 <ul style="list-style-type: none"> • Caps last connector at end of tape run if tape is not cut 

3' Track Section	12330 WH, BK (10-pack) <ul style="list-style-type: none"> • 3' track section • Snaps on the score every 6" • Captive screws every 6" • White or Black finish 
LED Tape RGB Controller	10199 BK <ul style="list-style-type: none"> • Must be used with RGB tape light • Multiple modes for unique light settings • Adjusts speed and brightness • Must be contained in a waterproof enclosure rated for outdoor use 

TaskWork LED Tape Light




24 Volt DC Wet Location RGB

Select Power Supply Leads & Interconnect Cables

Outdoor RGB Interconnect Cables	31C2RGB WH, BK	2'	Interconnect
	31C5RGB WH, BK	5'	Interconnect
	31C10RGB WH, BK	10'	Interconnect
	<ul style="list-style-type: none">• Used as a "jumper" wire to connect 2 sections of tape together 		
3-Way Connector	3C3RGBCLR	<ul style="list-style-type: none">• Connects 3 sections of tape together.• Ideal for making "T" or "Y" connections.• One input, two outputs.• 6" length 	
	3C4RGBCLR	<ul style="list-style-type: none">• Connects 4 sections of tape together.• Can be used with a Supply Lead.• One input, three outputs.• 6" length 	

Select Outdoor Wet Power Supply

Total wattage of tape light cannot exceed wattage rating of power supply.

Plug-in Power Supply	10194AL25 25W	<ul style="list-style-type: none">• 6' cord & plug• 6' lead wire with waterproof DC2.1 jack• Suitable for outdoor wet locations• 2.5W minimum load requirement• 9.5" L x 1.75" W x 1.25" H 
	10194AL60 60W	<ul style="list-style-type: none">• 6' cord & plug• 6' lead wire with waterproof DC2.1 jack• Suitable for outdoor wet locations• 6W minimum load requirement• 9.5" L x 1.75" W x 1.25" H 
	10194AL100 100W	<ul style="list-style-type: none">• 6' cord & plug• 6' lead wire with waterproof DC2.1 jack• Suitable for outdoor wet locations• 10W minimum load requirement• 9.5" L x 2.25" W x 1.5" H 

KICHLER LIGHTING
World Headquarters
7711 E. Pleasant Valley Rd.
PO Box 318010
Cleveland, Ohio 44131-8010
www.kichler.com

© Copyright All rights reserved
Kichler Lighting