

Product Information


| | | | |
|---|-------------------------------|----|-----------|
| Applicable product: | | | |
| 5' Custom bath whirlpool, drop-in | | | K-1337-CN |
| Fixture*: | | | |
| Basin area: | | | |
| Bathing well | 42" (1067 mm) x 28" (711 mm) | | |
| Top area | 55" (1397 mm) x 40" (1016 mm) | | |
| Weight | 110 lbs (49.9 kg) | | |
| To overflow: | | | |
| Water depth | 15-1/2" (394 mm) | | |
| Capacity | 73 gal (276.3 L) | | |
| * Approximate measurements for comparison only. | | | |
| Included components: | | | |
| Cut-out template | | | 1017044-7 |
| Pump: | V | Hz | A |
| 1-speed | 120 | 60 | 7.5 |

Required Electrical Service

| | |
|---|--------------------|
| Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI): | |
| Pump/control | 120 V, 15 A, 60 Hz |
| Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump. | |

Installation Notes

Install this product according to the installation guide.
 Floor support under whirlpool must provide for a minimum of 42 lbs/square foot (206 kg/square meter) loading.
 Fixture conforms to CSA B45.5/IAPMO Z124. All dimensions are nominal.

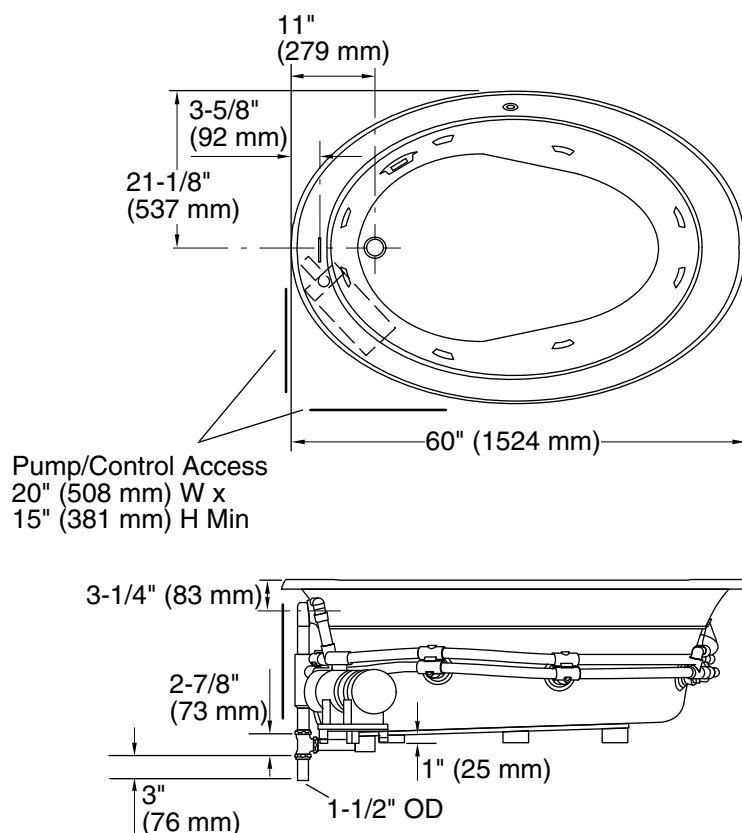

No change in measurements if connected with drain illustrated. (K-7166-AF)

