

Features


- Vitreous china
- Elongated bowl
- Comfort Height®
- Class Five® flushing system
- Includes seat, cover, wax ring, polished chrome trip lever and floor hardware
- Less supply
- 12" (305 mm) rough-in
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) glazed trapway
- 11-3/8" (289 mm) x 8" (203 mm) water area
- 29-1/2" (749 mm) x 19-5/8" (498 mm) x 30-3/8" (772 mm)

THE COMPLETE SOLUTION® TOILET K-11499

ADA

CSA B651

OBC

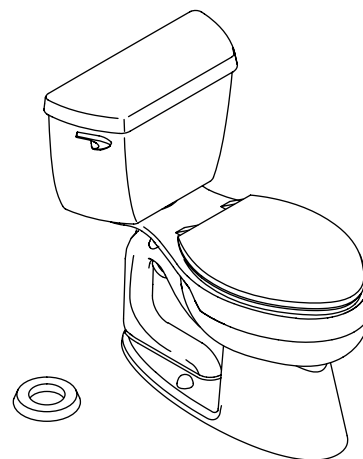

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.2/CSA B45.1
- EPA WaterSense®

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- 96: Biscuit
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Trip Lever	Colors/Finishes	
K-11499	The Complete Solution toilet	left-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Recommended Accessories				
K-4731	Stronghold™ elongated open-front toilet seat – for Accessibility compliance		<input type="checkbox"/> 0	<input type="checkbox"/> 96 <input type="checkbox"/> Other_____
K-7637	Angle supply with stop – 3/8" NPT		<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Product Specification

The Comfort Height elongated bowl toilet shall be made of vitreous china. Product shall be 29-1/2" (749 mm) in length, 19-5/8" (498 mm) in width, and 30-3/8" (772 mm) in height with a 11-3/8" (289 mm) x 8" (203 mm) water area. Product shall be for 12" (305 mm) rough-in and less supply. Product shall feature a 1.28 gpf (4.8 lpf) and Class Five flushing system. Product shall include seat, cover, wax ring, polished chrome trip lever, and floor hardware. Product shall have a 2-1/8" (54 mm) glazed trapway. Toilet shall be Kohler Model K-11499-_____.

HIGHLINE®

Technical Information

Fixture:	
Configuration	two-piece, elongated
Water per flush	1.28 gal (4.8 L)
Passageway	2-1/8" (54 mm)
Water area	11-3/8" (289 mm) x 8" (203 mm)
Water depth from rim	5-3/8" (137 mm)
Seat post hole centers	5-1/2" (140 mm)
Included components:	
Bowl	K-4199
Tank	K-4436
Tank cover	84591
Trip lever	K-9386-L
Toilet seat	K-4664
Wax ring and hardware installation kit	1023457
Bolt cap accessory pack	1013092

Installation Notes


Install this product according to the installation guide.

Will comply with the American Disabilities Act (**ADA**) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

Will comply with **CSA B651** when installed per Clause 4.3.6 of the standard.

Will comply with **OBC** Barrier Free requirements when installed per Clause 3.8.3.8 and 3.8.3.9.

For back-to-back installations, the toilet shall be connected to the vertical stack using one of the three following fittings: double fixture fitting, double combination wye and 1/8 bends, or double wye and 1/8 bends.

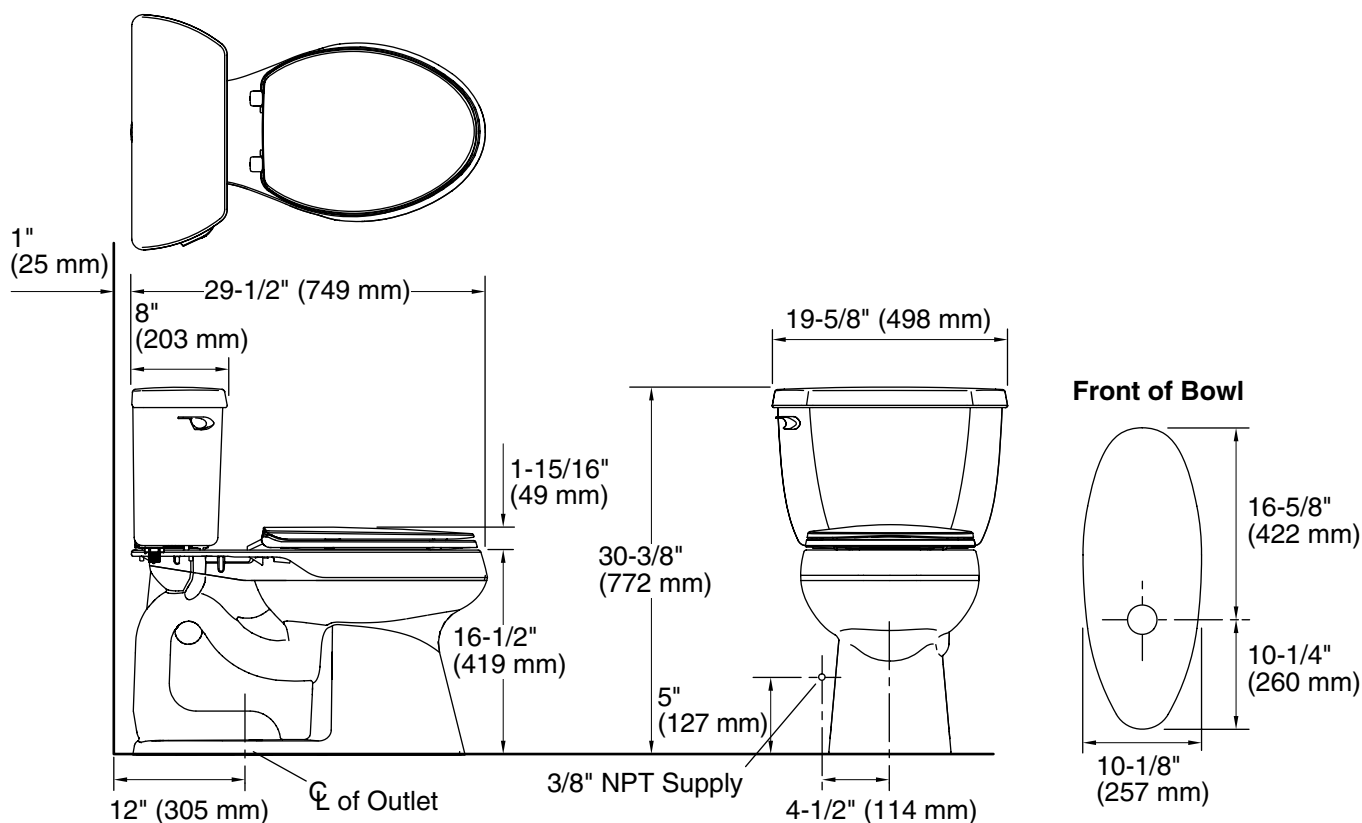

Product Diagram