

Features


- Vitreous china
- Elongated bowl
- Comfort Height®
- AquaPiston® flushing system
- Less supply
- 12" (305 mm) rough-in
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) glazed trapway
- Includes Glenbury™ seat with cover
- Includes wax ring, left-hand polished chrome trip lever, and floor hardware
- 11-3/4" (298 mm) x 9-1/2" (241 mm) water area
- 30-3/8" (772 mm) x 17-13/16" (452 mm) x 31-7/16" (799 mm)

THE COMPLETE SOLUTION® TOILET K-10493

ADA

CSA B651

OBC

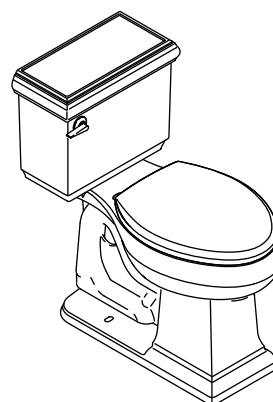

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.2/CSA B45.1
- Energy Policy Act of 1992

Colors/Finishes

- 0: White

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes
K-10493	The Complete Solution toilet	<input type="checkbox"/> 0
Recommended Accessories		
K-4650	Lustra™ elongated open-front seat – for Accessibility compliance	<input type="checkbox"/> 0 <input type="checkbox"/> CP <input type="checkbox"/> PB <input type="checkbox"/> Other_____
K-7637	Angle supply with stop – 3/8" NPT	<input type="checkbox"/> CP <input type="checkbox"/> PB <input type="checkbox"/> Other_____

Product Specification

The elongated bowl toilet shall be made of vitreous china. Toilet shall be 30-3/8" (772 mm) in length, 17-13/16" (452 mm) in width, and 31-7/16" (799 mm) in height with an 11-3/4" (298 mm) by 9-1/2" (241 mm) water area. Toilet shall be 1.28 gpf (4.8 lpf) with AquaPiston flushing system. Toilet shall be 12" (305 mm) rough-in and less supply. Toilet shall be Comfort Height. Toilet shall feature 2-1/8" (54 mm) glazed trapway. Toilet shall include Glenbury seat with cover, wax ring, left-hand polished chrome trip lever, and floor hardware. Elongated bowl toilet shall be Kohler Model K-10493-_____.

Technical Information

Fixture:	
Configuration	two-piece, elongated
Water per flush	1.28 gpf (4.8 lpf)
Passageway	2-1/8" (54 mm)
Water area	11-3/4" (298 mm) x 9-1/2" (241 mm)
Water depth from rim	6-1/8" (156 mm)
Seat post hole centers	5-1/2" (140 mm)
Included components:	
Bowl	K-4380
Tank	K-4433
Tank cover	1052861
Trip lever, left-hand	K-9167
Toilet seat	K-4684
Bolt cap accessory pack	1013092
Wax ring and hardware installation kit	1023457

Installation Notes

Install this product according to the installation guide.

For back-to-back toilet installations: Use only a 45° double wye fitting.


Will comply with the Americans with Disabilities Act (**ADA**) when installed per the requirements of the 2010 ADA Standards for Accessible Design, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

The model is acceptable for left-hand Accessible compartment installations only.

Will comply with **CSA B651** when installed per Clause 4.3.6 of the standard.

Will comply with **OBC** when installed per Clause 3.8.3.8 and 3.8.3.9.

Fixture conforms to ASME Standard A112.19.2/CSA B45.1. All dimensions are nominal.

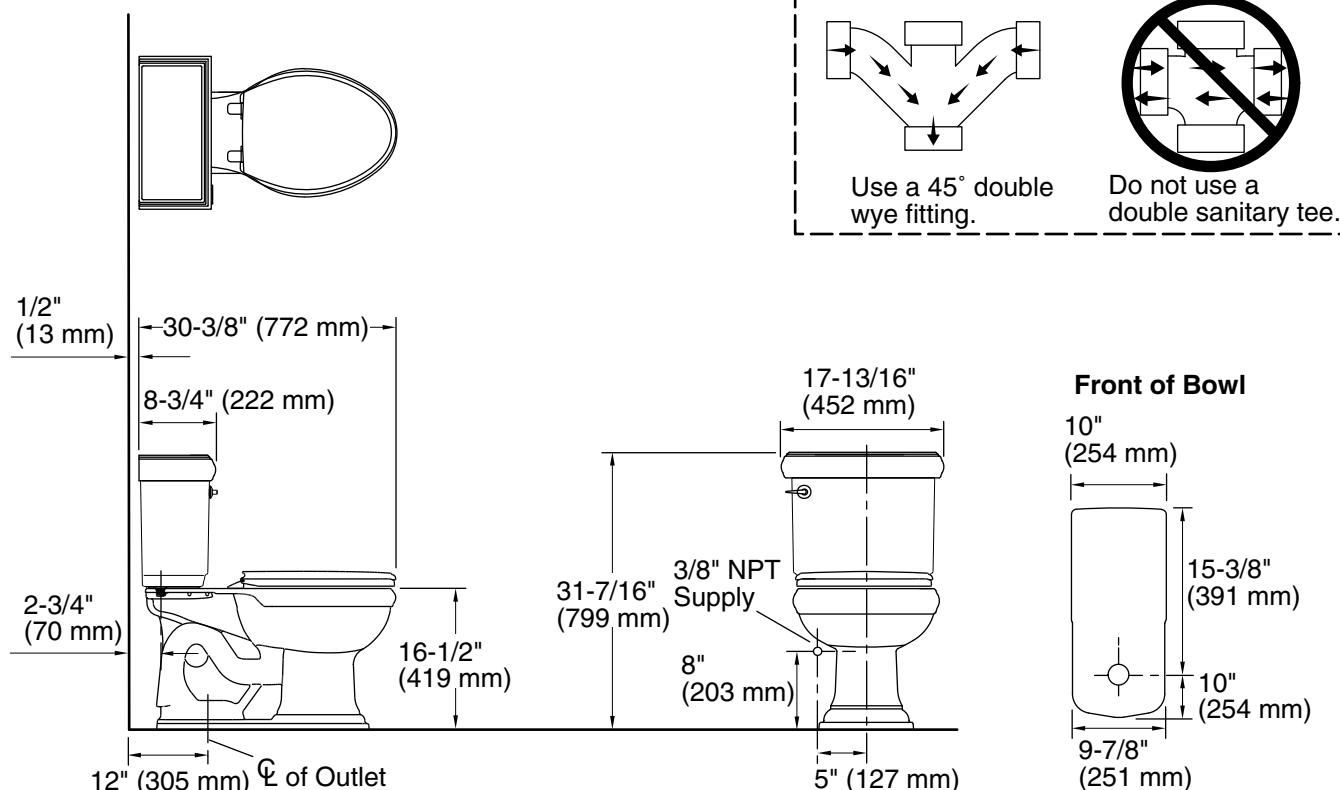

Product Diagram