

Features

- Advanced spray engine with easy-grip sprayface provides three alternate experiences: wide coverage, soft aerated, and massage spray.
- MasterClean™ sprayface is easy to clean.
- .5 gpm (9.5 L) flow rate.
- 1/2-inch NPT connection.
- Coordinates with Bancroft faucets and accessories.
- Showerarm and flange not included.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- Wall-mount

Recommended Accessories

K-7397 Shower Arm and Flange



Codes/Standards






ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992

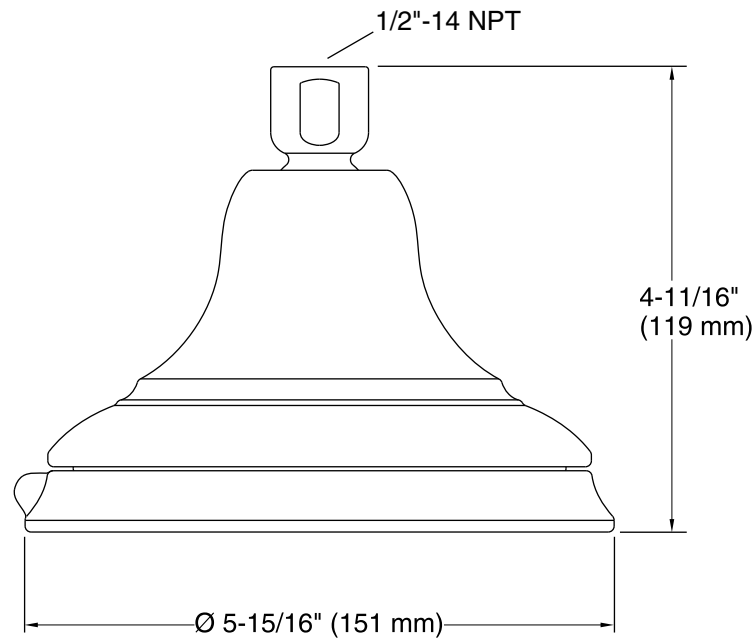
KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2BZ	Oil-Rubbed Bronze



Technical Information

All product dimensions are nominal.

Showerhead:

Rated maximum flow: 2.5 gal/min (9.5 l/min)

Pressure: 80 psi (5.5 bar)

Notes

Install this product according to the installation guide.