

### Features

- Includes four 1.5 V AA batteries.
- Fixture-mount design.

### Material

- Brass construction.

### Technology

- Slow-closing piston technology.
- Electronic infrared sensor with TriPoint™ technology for accurate activation.

### Installation

- Intended for toilet installations with 1-1/2" spud coupling connection.

### Optional Accessories

GP1118986 Flushometer Extension Kit  
K-10313 12" Supply Line Sleeve  
K-13716 24" Tailpiece



CSA B651

OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1

CSA B64

CSA B125.3

ASSE 1037

All applicable US Federal and State material regulations

ICC/ANSI A117.1


CSA B651

OBC

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

\*11-3/8" (289 mm) minimum with a  
6" (152 mm) critical level above the fixture

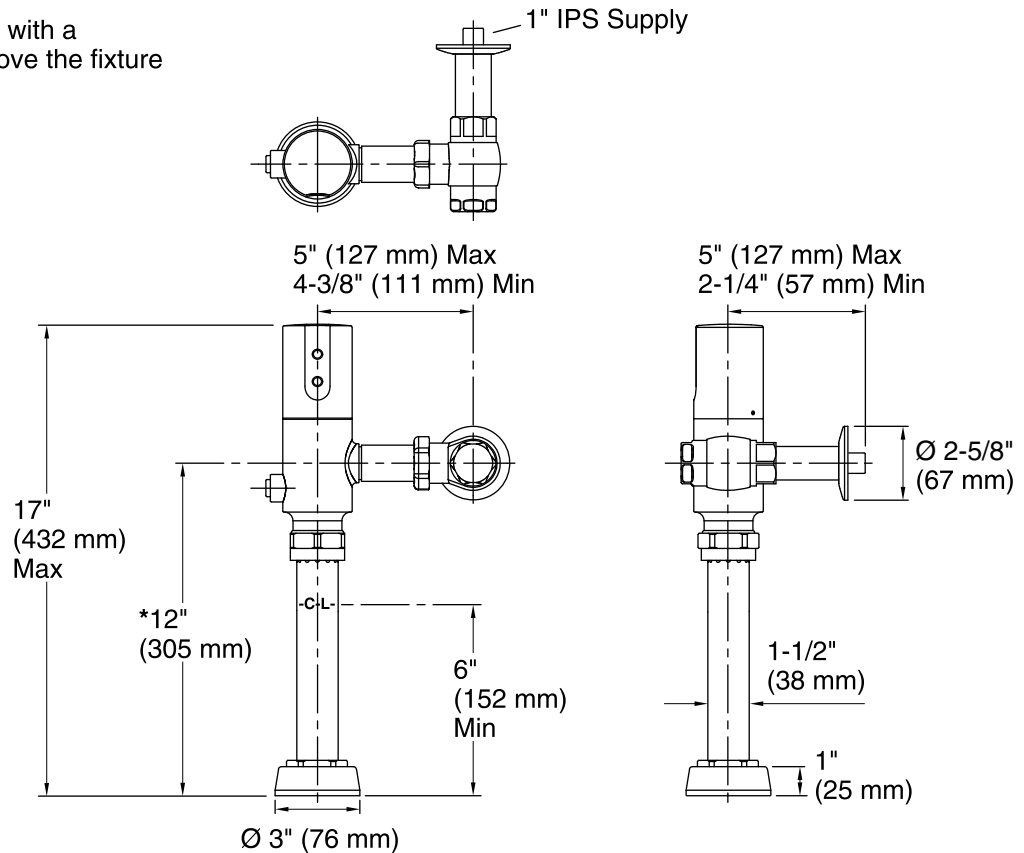

### Technical Information

All product dimensions are nominal.

### Pressure and Supply Requirements

Fixture flow rate min: 25 gpm (94.6 lpm)

Fixture pressure max 80 psi (551.6 kPa)  
(static):

Power source: AA 1.5 V, included

### Notes

Install this product according to the installation guide.

OBC, CSA B651 compliant when installed to the specific requirements of these regulations.