



# Archer®

## 5' BubbleMassage™ Whirlpool Bath

### K-1122-XHGLA



#### Features

- Integral flange.
- Slotted overflow for deep soaking.
- Left drain.
- Coordinates with other products in the Archer® collection.
- Integral apron with removable access panel.
- Integral lumbar support and armrests for comfort.

#### Hydrotherapy

- 118 BubbleMassage™ airjets.
- Single-speed whirlpool offers eight fully adjustable hydro-massage jets for water flow and direction.
- Variable-speed blower for adjusting hydromassage intensity.
- Automatic purge cycles remove residual water from air channels after use.
- Keypad control.
- Built-in 300 W heater.

#### Installation

- Alcove

#### Required Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

#### Recommended Accessories

K-24916 Wireless Music Kit



ADA

#### Codes/Standards

ASME A112.19.7/CSA B45.10

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

UL 1795

Greenguard UL 2818 - Gold

ADA










ICC/ANSI A117.1

#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Color/Finishes

*Color tiles intended for reference only.*

| Color  | Code | Description   |
|--|------|---------------|
|  | 0    | White         |
|  | 96   | Biscuit       |
|  | 47   | Almond        |
|  | NY   | Dune          |
|  | 95   | Ice™ Grey     |
|  | G9   | Sandbar       |
|  | 33   | Mexican Sand™ |
|  | K4   | Cashmere      |
|  | 58   | Thunder™ Grey |

USA/Canada: 1-800-4KOHLER (1-800-456-4537)


Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com).



1-13-2017 03:26

THE BOLD LOOK  
OF **KOHLER**®

## 5' BubbleMassage™ Whirlpool Bath K-1122-XHGLA

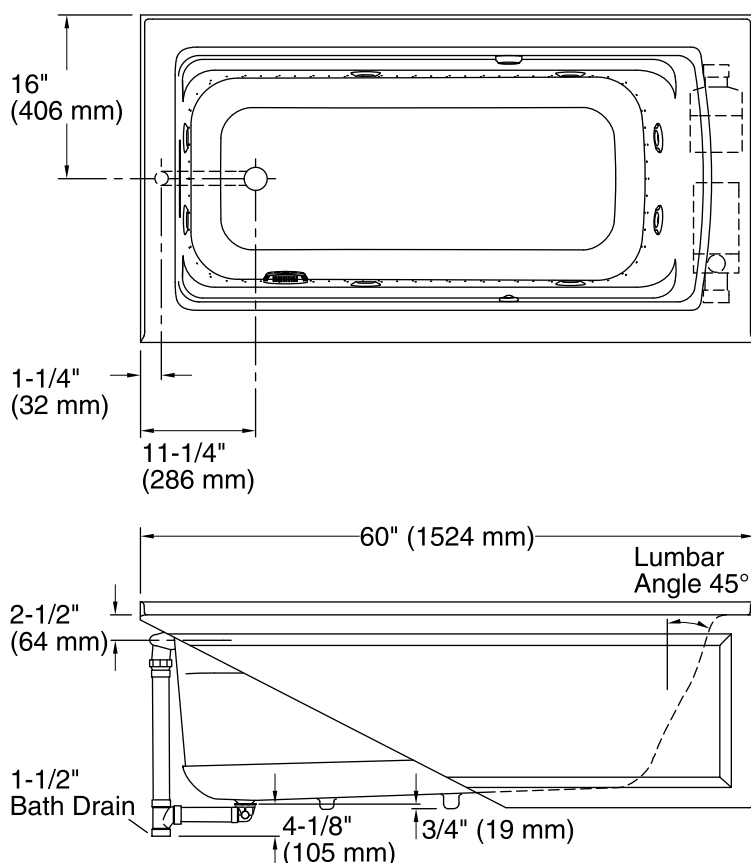

No change in measurements if connected with drain illustrated. (K-7271 or K-7272)

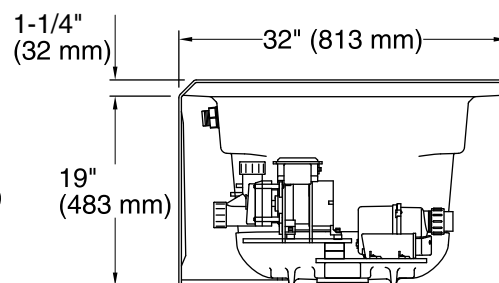

### Required Electrical Service

Three dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

|         |                    |
|---------|--------------------|
| Blower: | 120 V, 15 A, 60 Hz |
| Pump:   | 120 V, 15 A, 60 Hz |
| Heater: | 120 V, 15 A, 60 Hz |

### Technical Information

All product dimensions are nominal.

|                              |  |
|------------------------------|--|
| Installation:                | 3-Wall Alcove  |
| Drain location:              | Left   |
| Basin area, bottom:          | 45-1/8" x 19-11/16" (1146 mm x 500 mm)   |
| Basin area, top:             | 52-3/4" x 25-5/16" (1340 mm x 643 mm)  |
| Weight:                      | 160 lbs (72.6 kg)  |
| Minimum floor load:          | 52 lbs/ft² (253.9 kg/m²)   |
| Water depth:                 | 15" (381 mm)   |
| Water capacity:              | 58 gal (219.6 L)   |
| Electrical component rating: | Blower: 120 V, 10 A, 60 Hz, 300 W<br>Pump: 120 V, 7 A, 60 Hz<br>Heater: 120 V, 12.5 A, 60 Hz, 1500 W |
| Blower speed:                | Variable   |

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

Remote blower installation kit is available for relocating the blower. Provide access for servicing the blower.

Do not relocate or alter the PVC tee or coiled flexible tubing connected to the blower. Follow the blower relocation instructions exactly.

ADA compliant when installed to the specific requirements of these regulations.