

# **Underscore®**

5' Bath **K-1130** 



# **Features**

- End drain.
- Slotted overflow for deep soaking.
- Integral lumbar support.
- 60" (1524 mm) x 32" (813 mm) x 21" (533 mm)

### Material

Acrylic

#### Installation

Drop-in or under-mount.

# **Required Accessories**

K-7271 Brass Slotted Overflow Bath Drain

K-7272 PVC Slotted Overflow Bath Drain

### **Recommended Accessories**

K-590 Under-mount Installation Kit K-24916 Wireless Music Kit K-1601 Bath/Whirlpool Footstop



# Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold

# KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

## **Available Color/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™







**KOHLER**®


5' Bath **K-1130** 

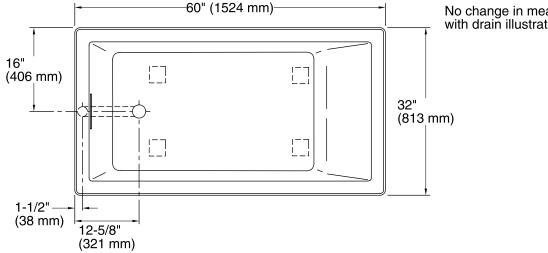

No change in measurements if connected with drain illustrated. (K-7272)



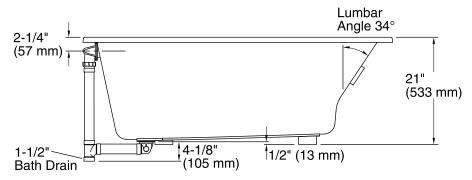



# **Technical Information**

All product dimensions are nominal.

Installation: Drop-in, Under-mount

Drain location: End

Basin area, bottom: 42" x 23-1/2" (1067 mm x 597 mm)
Basin area, top: 55-1/8" x 27-1/8" (1400 mm x 689 mm)

Weight: 75 lbs (34 kg)

Minimum floor load: 58 lbs/ft² (283.2 kg/m²)
Water depth: 17-1/8" (435 mm)
Water capacity: 81 gal (306.6 L)

Cutout: Drop-in, 59-1/2" x 31-1/2" (1511 mm x

800 mm)

Minimum flat for door: 2-3/8" (60 mm)

#### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

