



Escale®
6' BubbleMassage™ Bath
K-11343-GCR



Features

- Center drain.
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood.
- Integral lumbar support.
- Coordinates with other products in the Escale collection.
- 71-5/8" (1819 mm) x 35-5/8" (905 mm) x 24-1/8" (613 mm)

Material

- Acrylic

Hydrotherapy

- 122 BubbleMassage™ airjets. 18 levels of massage intensity.
- Zones of Control feature allows you to target massage to back, midsection, or feet.
- Automatic purge cycles remove residual water from air channels after use.
- Built-in 300 W heater.
- Lighted keypad control.

Installation

- Drop-in

Recommended Accessories

K-1601 Bath/Whirlpool Footstop
K-1676 Bath/Pillow
K-1705 Whirlpool/BubbleMassage™ Remote Control
K-18486-4 Roman Bath Filler
K-7214 27" Cable Bath Drain
K-7219 Bath Drain
K-9498 3" Keypad Trim
K-24916 Wireless Music Kit
K-922
K-923 Bath Filler
K-924
K-7213 27" Cable Bath Drain
K-7265 Clearflo Bath Drain




Codes/Standards

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
Greenguard UL 2818 - Gold
CARB P2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

No change in measurements if connected with drain illustrated. (K-7214)

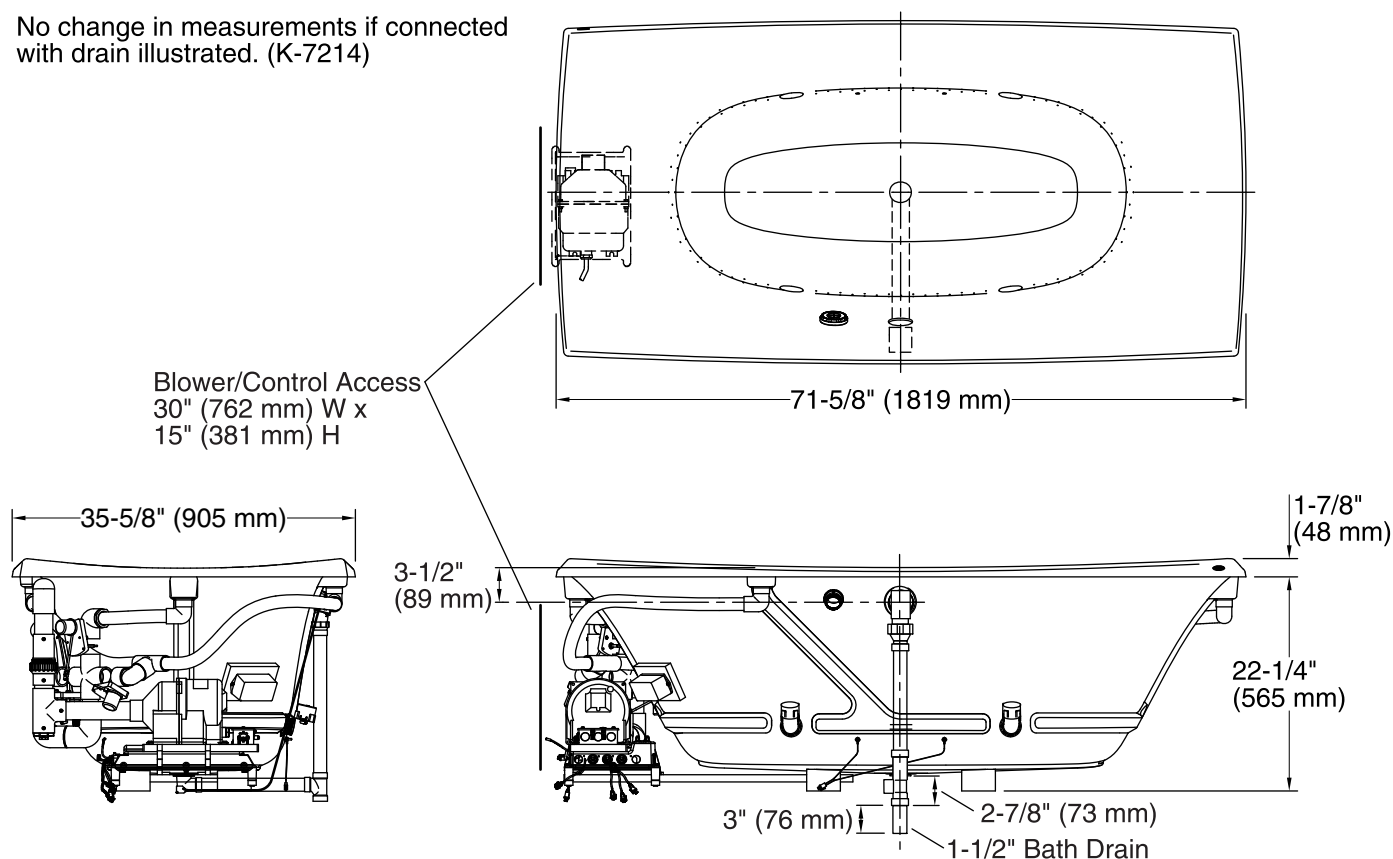

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Blower: 240 V, 15 A, 50/60 Hz

Technical Information

All product dimensions are nominal.

Installation: Drop-in
Drain location: Center
Basin area, bottom: 46-3/4" x 21-5/8" (1187 mm x 549 mm)
Basin area, top: 69-15/16" x 34-3/8" (1776 mm x 873 mm)
Weight: 130 lbs (59 kg)
Minimum floor load: 42 lbs/ft² (205.1 kg/m²)
Water depth: 16-1/2" (419 mm)
Water capacity: 71 gal (268.8 L)
Template: Drop-in, 1054544-7, required, included
Electrical component rating: Blower: 240 V, 5 A, 50/60 Hz, 300 W
Blower speed: Variable
Minimum flat for door: 0" (0 mm)

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

This bath is designed for drop-in installation only. It is not suited for use in a three wall alcove with an overhead shower.