



## ProFlex® 7242

6' Whirlpool Bath

K-1148-CH



### Features

- Center drain.
- Integral lumbar support and armrests for comfort.
- 72" (1829 mm) x 42-1/8" (1070 mm) x 19-3/4" (502 mm)

### Material

- Acrylic

### Hydrotherapy

- Single-speed whirlpool offers six fully adjustable hydro-massage jets for water flow and direction.
- Pump with air switch for whirlpool.

### Installation

- Drop-in

### Recommended Accessories

K-7213 27" Cable Bath Drain  
K-7214 27" Cable Bath Drain  
K-11677 Bath Drain  
K-24916 Wireless Music Kit



### Codes/Standards




ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
UL 1795  
Greenguard UL 2818 - Gold  
CARB P2

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes


*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond




Pump/Control Access

20" (508 mm) W x 15" (381 mm) H Min

7-1/2" (191 mm) Max

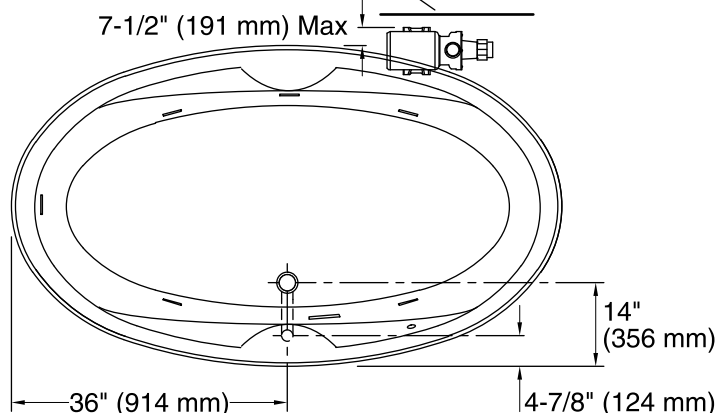

No change in measurements if connected with drain illustrated. (K-11677)

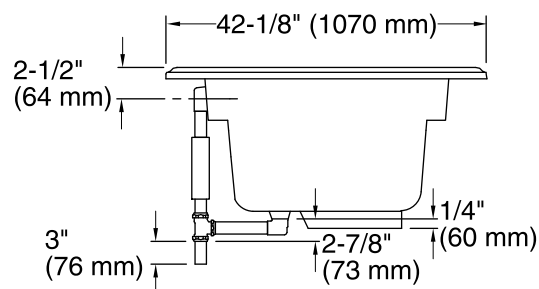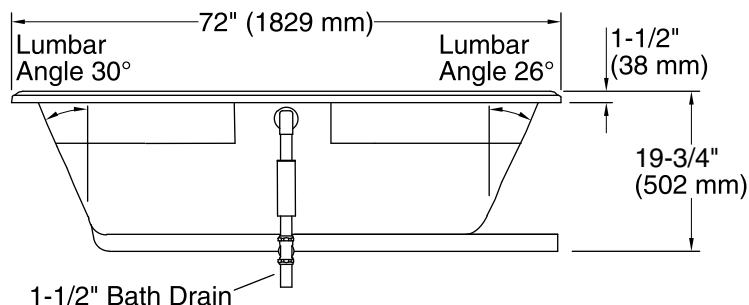

### Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

### Technical Information

All product dimensions are nominal.

Installation: Drop-in

Drain location: Center

Basin area, bottom: 53" x 26" (1346 mm x 660 mm)

Basin area, top: 65" x 34" (1651 mm x 864 mm)

Weight: 74 lbs (33.6 kg)

Minimum floor load: 36 lbs/ft² (175.8 kg/m²)

Water depth: 15" (381 mm)

Water capacity: 78 gal (295.3 L)

Template: Drop-in, 114861-7, required, included

Electrical component rating: Pump: 120 V, 7.5 A, 60 Hz

Pump speed: Single

Minimum flat for door: 0" (0 mm)

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

Pump must be relocated to custom position at the time of installation. Provide adequate clearance.