



# Bancroft®

## 5' Whirlpool Bath

### K-1151-HL



#### Features

- Integral flange.
- Left drain.
- Integral lumbar support.
- Textured bottom surface.
- Coordinates with other products in the Bancroft® collection.
- 60" (1524 mm) x 32" (813 mm) x 20" (508 mm)

#### Material

- Acrylic

#### Hydrotherapy

- Single-speed whirlpool offers eight fully adjustable hydro-massage jets for water flow and direction.
- Pump with air switch for whirlpool.
- Built-in 1500 W heater.

#### Installation

- Alcove

#### Recommended Accessories

K-11677 Bath Drain

K-24916 Wireless Music Kit



#### Codes/Standards

ASME A112.19.7/CSA B45.10

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

UL 1795

Greenguard UL 2818 - Gold

#### KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

#### Available Color/Finishes



*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

|                                                                                      |    |         |
|--------------------------------------------------------------------------------------|----|---------|
|  | 0  | White   |
|  | 96 | Biscuit |
|  | 47 | Almond  |
|  | NY | Dune    |
|  | G9 | Sandbar |

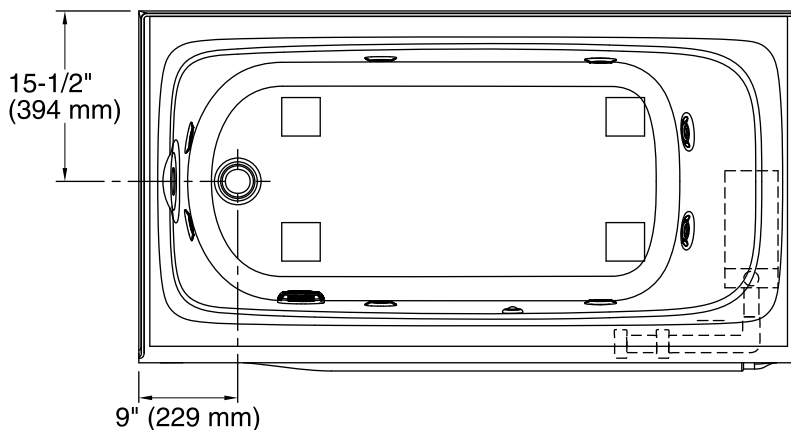

No change in measurements if connected with drain illustrated. (K-11677)

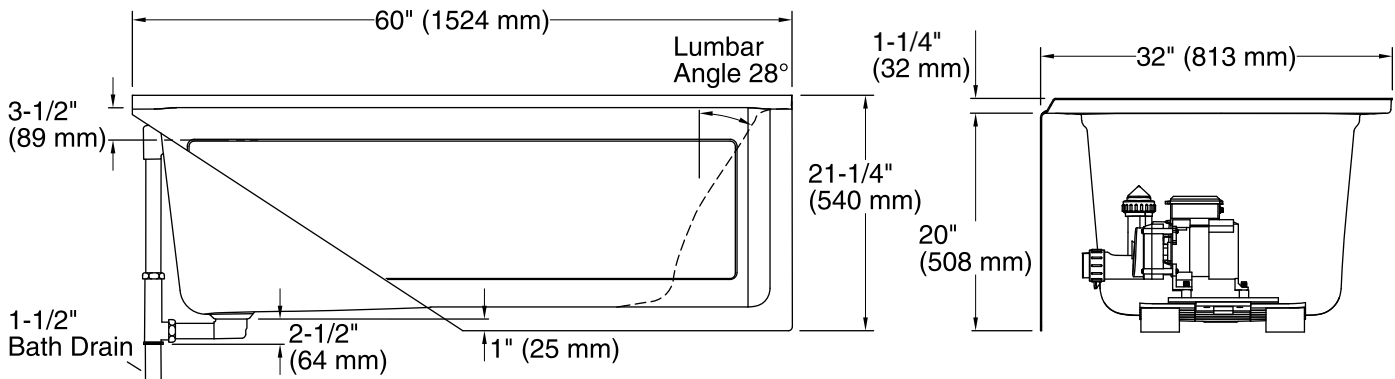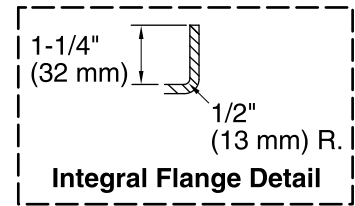

## Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz  
Heater: 120 V, 15 A, 60 Hz

## Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove  
Drain location: Left  
Basin area, bottom: 45" x 22" (1143 mm x 559 mm)  
Basin area, top: 54" x 25" (1372 mm x 635 mm)  
Weight: 140 lbs (63.5 kg)  
Minimum floor load: 50 lbs/ft² (244.1 kg/m²)  
Water depth: 15" (381 mm)  
Water capacity: 60 gal (227.1 L)  
Electrical component rating: Pump: 120 V, 7 A, 60 Hz  
Heater: 120 V, 12.5 A, 60 Hz, 1500 W  
Pump speed: Single  
Minimum flat for door: 2" (51 mm)

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.