



Bancroft®

5.5' Bath

K-1156-W1



Features

- End drain.
- 65-7/8" (1673 mm) x 41-3/4" (1060 mm) x 22" (559 mm)
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Integral lumbar support.
- Coordinates with other products in the Bancroft® collection.

Material

- Acrylic

Installation

- Drop-in

Recommended Accessories

K-1491 Bath/Whirlpool Pillow
K-1601 Bath/Whirlpool Footstop
K-7161-AF Bath Drain
K-7265 Clearflo Bath Drain
K-24916 Wireless Music Kit
K-37382 45" Rough-in Cable Bath Drain



Codes/Standards

CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
Greenguard UL 2818 - Gold
CARB P2






KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar

USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

12-20-2016 03:14


THE BOLD LOOK
OF **KOHLER®**

KOHLER®

Bancroft®

5.5' Bath

K-1156-W1

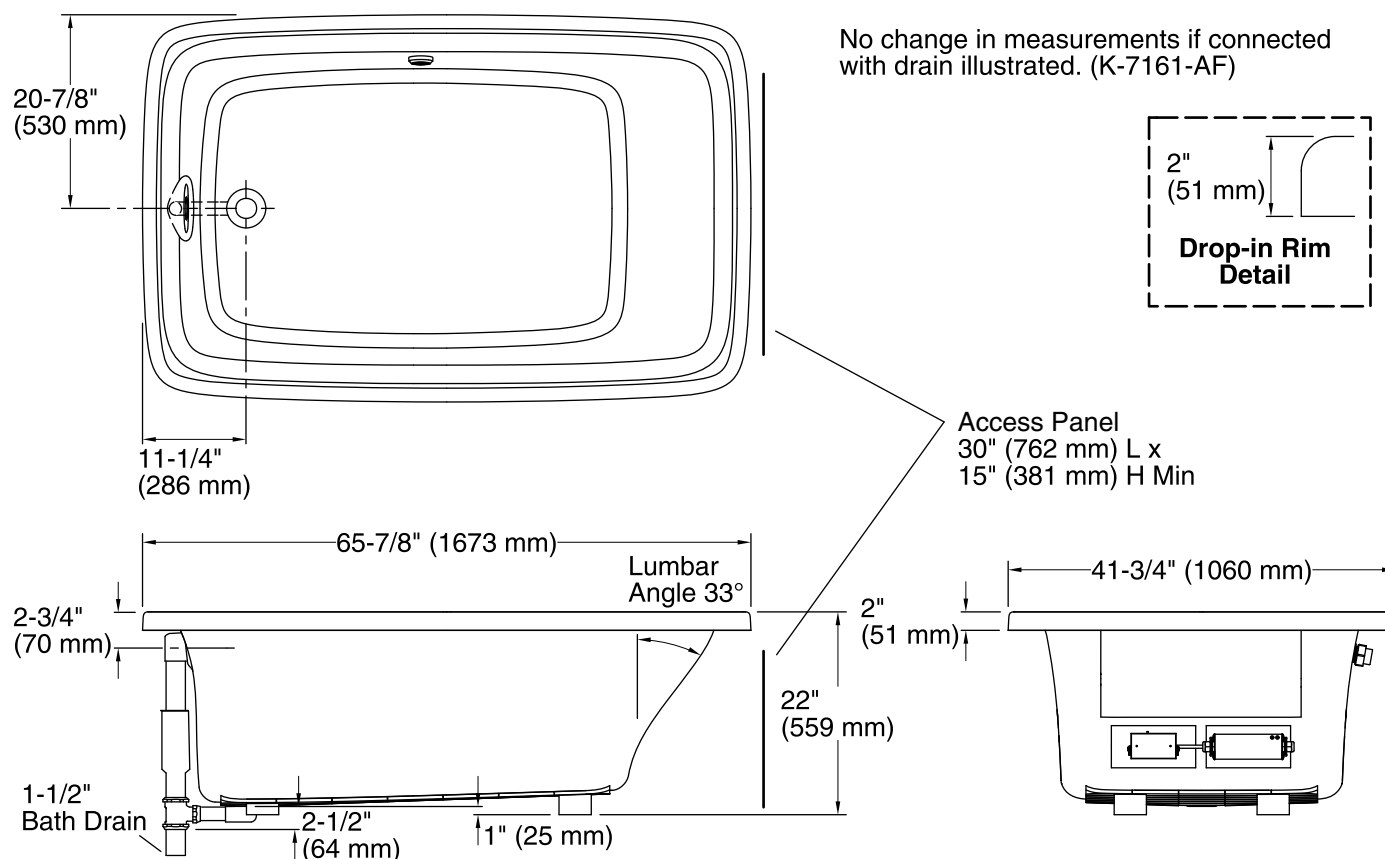

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Heated Surface: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation: Drop-in

Drain location: End

Basin area, bottom: 46" x 30" (1168 mm x 762 mm)

Basin area, top: 57" x 34" (1448 mm x 864 mm)

Weight: 80 lbs (36.3 kg)

Minimum floor load: 47 lbs/ft² (229.5 kg/m²)

Water depth: 16" (406 mm)

Water capacity: 95 gal (359.6 L)

Template: Drop-in, 1043292-7, required, included

Electrical component rating:	Heated Surface: 120 V, 0.5 A, 60 Hz, 65 W
------------------------------	---

Minimum flat for door: 0" (0 mm)

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.