



Bancroft®

5.5' Whirlpool Bath

K-1158-H2



Features

- 66" (1676 mm) x 42" (1067 mm) x 22" (559 mm)
- Coordinates with other products in the Bancroft® collection.
- End drain.
- Slotted overflow for deep soaking.
- Integral lumbar support.

Material

- Acrylic

Hydrotherapy

- Eight fully adjustable Flexjet™ hydrotherapy jets for water flow and direction.
- Built-in 1500 W heater.
- Lighted keypad control.

Installation

- Drop-in



Recommended Accessories

- K-1491 Bath/Whirlpool Pillow
- K-1601 Bath/Whirlpool Footstop
- K-1703 Whirlpool Remote Control
- K-7161-AF Bath Drain
- K-9497 2-1/2" Keypad Trim
- K-24916 Wireless Music Kit
- K-7265 Clearflo Bath Drain
- K-9698 Flexjet® Whirlpool Trim Kit
- K-37382 45" Rough-in Cable Bath Drain

Codes/Standards






- ASME A112.19.7/CSA B45.10
- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- UL 1795
- Greenguard UL 2818 - Gold

KOHLER® One-Year Limited Warranty



See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar

No change in measurements if connected with drain illustrated. (K-7161-AF)

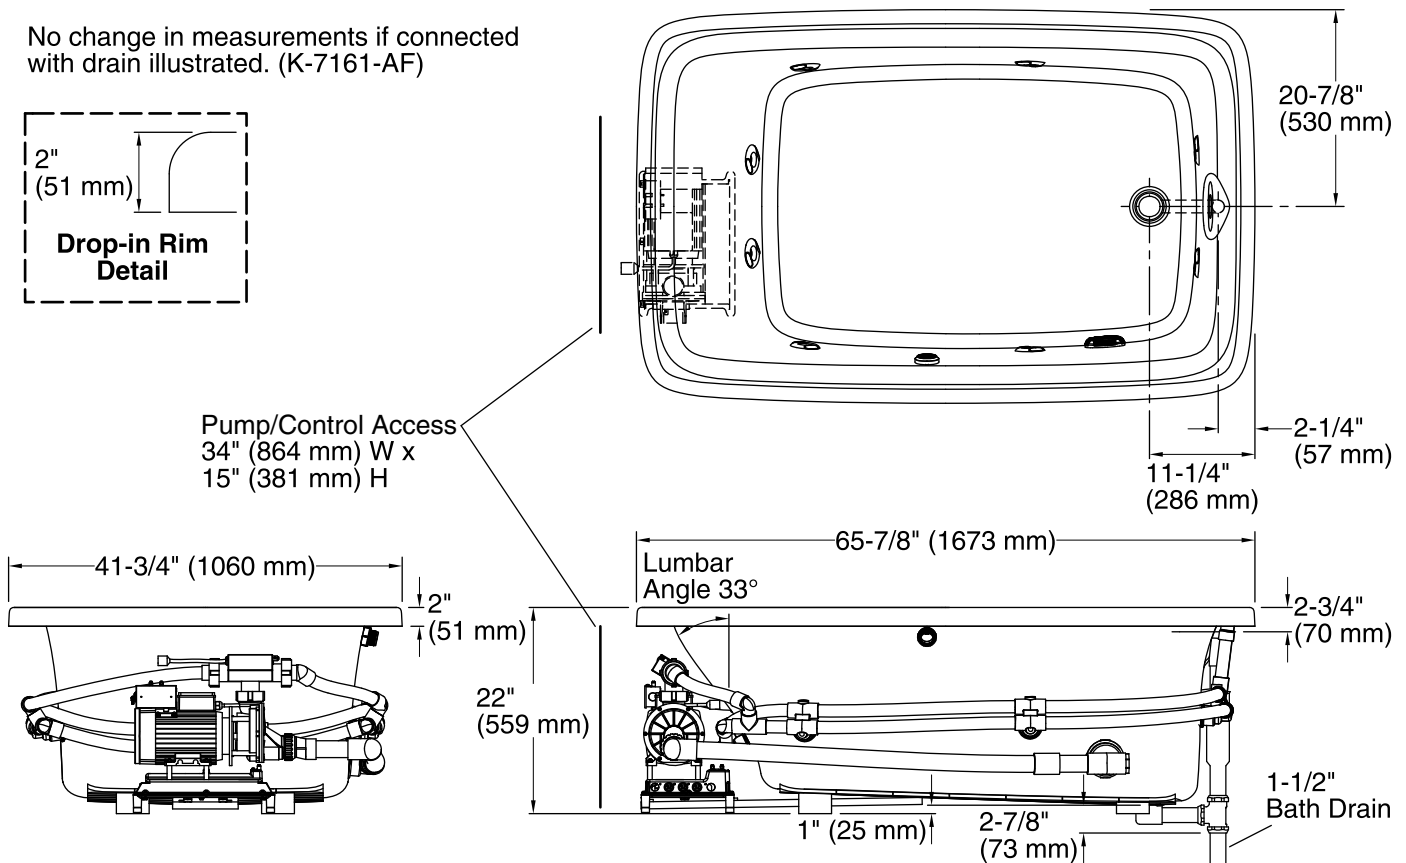

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Heater: 240 V, 20 A, 50/60 Hz

Technical Information

All product dimensions are nominal.

Installation: Drop-in
Drain location: End
Basin area, bottom: 46" x 30" (1168 mm x 762 mm)
Basin area, top: 57" x 34" (1448 mm x 864 mm)
Weight: 130 lbs (59 kg)
Minimum floor load: 50 lbs/ft² (244.1 kg/m²)
Water depth: 16" (406 mm)
Water capacity: 95 gal (359.6 L)
Template: Drop-in, 1043292-7, required, included
Electrical component rating: Pump: 240 V, 11 A, 50/60 Hz
Heater: 240 V, 6.25 A, 50/60 Hz, 1500 W
Pump speed: Variable
Minimum flat for door: 0" (0 mm)

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

This bath is designed for drop-in installation only. It is not suited for use in a three wall alcove with an overhead shower.