



**Bancroft®**  
5.5' Whirlpool Bath  
**K-1158-HE**



**Features**

- End drain.
- Coordinates with other products in the Bancroft® collection.
- 65-7/8" (1673 mm) x 41-3/4" (1060 mm) x 22" (559 mm)

**Material**

- Acrylic

**Hydrotherapy**

- Variable-speed pump for adjusting hydromassage intensity.
- Multiple pump location options give you more choices for installation and access.
- Built-in 1500 W heater.
- Eight fully adjustable Flexjet™ hydrotherapy jets for water flow and direction.
- Remote control.

**Installation**

- Drop-in

**Recommended Accessories**

K-7161-AF Bath Drain  
K-24916 Wireless Music Kit  
K-1703 Whirlpool Remote Control  
K-7265 Clearflo Bath Drain  
K-9497 2-1/2" Keypad Trim  
K-9698 Flexjet® Whirlpool Trim Kit  
K-37382 45" Rough-in Cable Bath Drain





**Codes/Standards**

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E162  
UL 1795  
Greenguard UL 2818 - Gold



**KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

No change in measurements if connected with drain illustrated. (K-7161-AF)

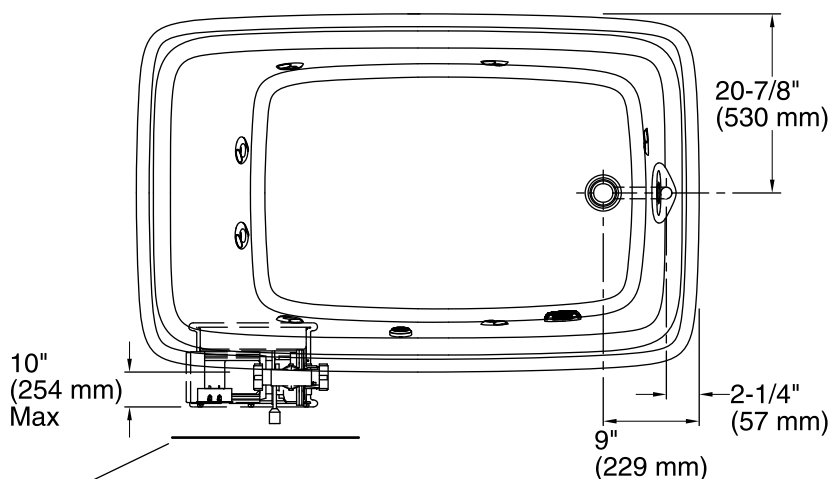

Pump/Control Access  
34" (864 mm) W x 15" (381 mm) H

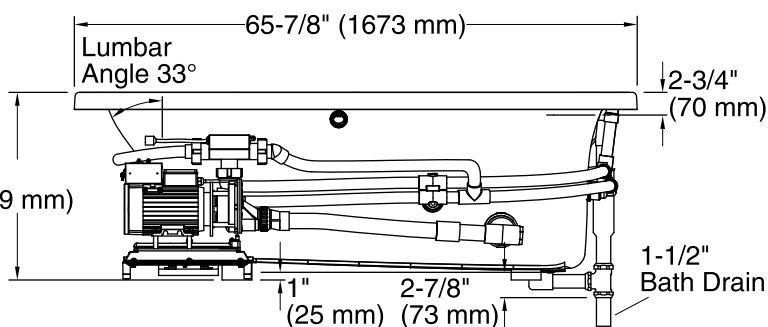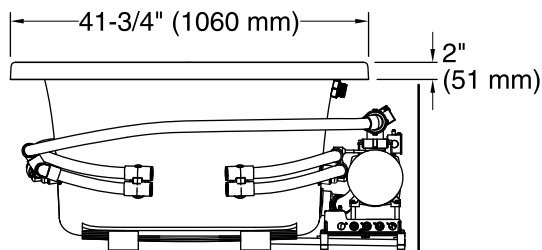

## Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Heater: 240 V, 20 A, 50/60 Hz

## Technical Information

All product dimensions are nominal.

Installation:	Drop-in
Drain location:	End
Basin area, bottom:	46" x 30" (1168 mm x 762 mm)
Basin area, top:	57" x 34" (1448 mm x 864 mm)
Weight:	130 lbs (59 kg)
Minimum floor load:	50 lbs/ft <sup>2</sup> (244.1 kg/m <sup>2</sup> )
Water depth:	16" (406 mm)
Water capacity:	95 gal (359.6 L)
Electrical component rating:	Pump: 240 V, 11 A, 50/60 Hz Heater: 240 V, 6.25 A, 50/60 Hz, 1500 W
Pump speed:	Variable
Minimum flat for door:	0" (0 mm)

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

This bath is designed for drop-in installation only. It is not suited for use in a three wall alcove with an overhead shower.

Pump must be relocated to custom position at the time of installation. Provide adequate clearance.