



# Tercet®

## 5' Whirlpool Bath

### K-1160-HD



#### Features

- Center drain.
- Integral lumbar support and armrests for comfort.
- Textured bottom surface.
- 60" (1524 mm) x 60" (1524 mm) x 21" (533 mm)

#### Material

- Acrylic

#### Hydrotherapy

- Single-speed whirlpool offers six fully adjustable hydro-massage jets for water flow and direction.
- Pump with air switch for whirlpool.
- Multiple pump location options give you more choices for installation and access.
- Built-in 1500 W heater.

#### Installation

- Drop-in

#### Recommended Accessories

K-11677 Bath Drain  
K-1491 Bath/Whirlpool Pillow  
K-1601 Bath/Whirlpool Footstop  
K-9696 Whirlpool 6-Jet Trim Kit  
K-7259 Clearflo Bath Drain  
K-37382 45" Rough-in Cable Bath Drain



#### Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
Greenguard UL 2818 - Gold




#### KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

#### Available Color/Finishes




*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	0	White
	96	Biscuit
	47	Almond

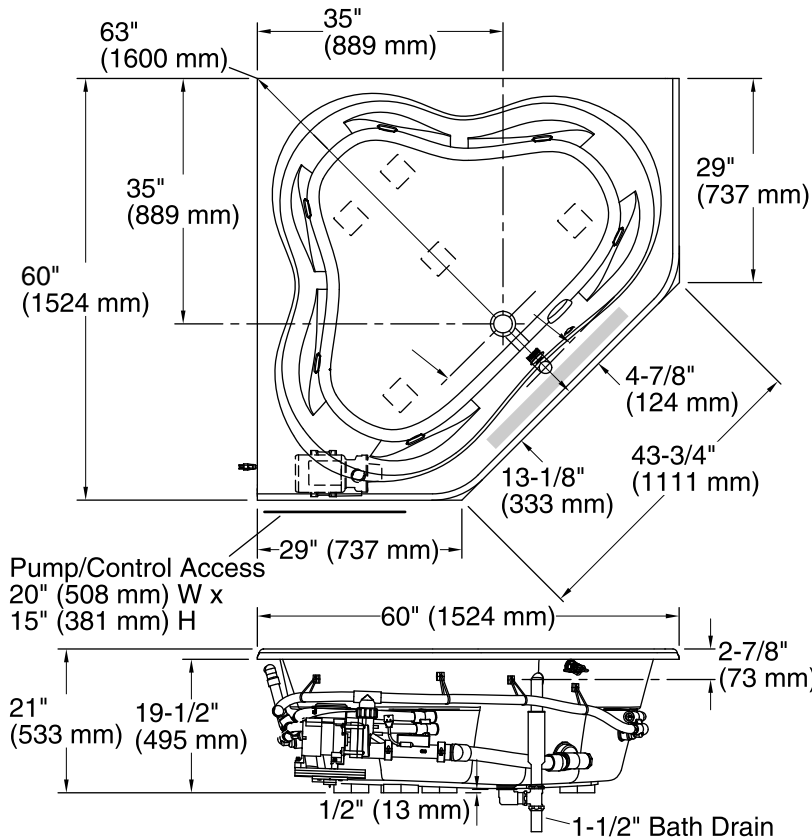

No change in measurements if connected with drain illustrated. (K-11677)

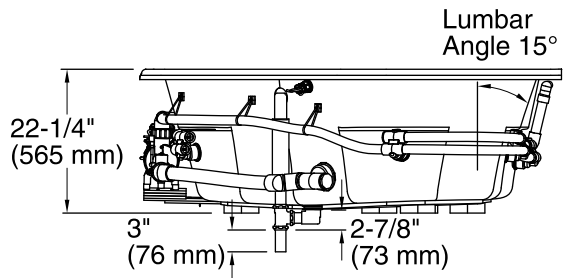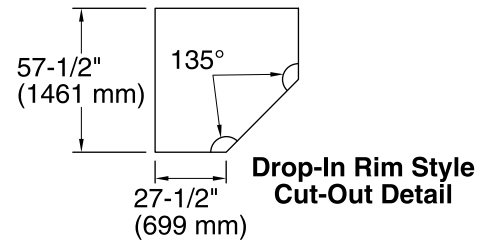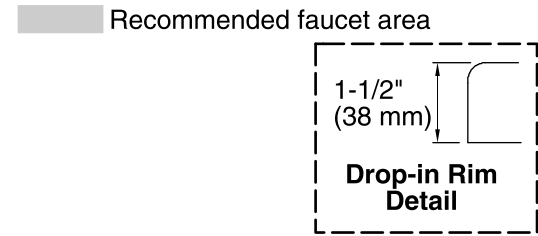

## Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz  
 Heater: 120 V, 15 A, 60 Hz

## Technical Information

All product dimensions are nominal.

Installation: Drop-in  
 Drain location: Center  
 Basin area, bottom: 52" x 38-3/4" (1321 mm x 984 mm)  
 Basin area, top: 61" x 46-1/4" (1549 mm x 1175 mm)  
 Weight: 131 lbs (59.4 kg)  
 Minimum floor load: 39 lbs/ft² (190.4 kg/m²)  
 Water depth: 15" (381 mm)  
 Water capacity: 96 gal (363.4 L)  
 Electrical component rating: Pump: 120 V, 7.5 A, 60 Hz  
 Heater: 120 V, 12.5 A, 60 Hz, 1500 W  
 Pump speed: Single  
 Minimum flat for door: 0" (0 mm)

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.