

Sunward® 6' Whirlpool Bath

6' Whirlpool Bath **K-1164-W1**



Features

- End drain.
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Integral lumbar support and armrests for comfort.
- Textured bottom surface.
- 72" (1829 mm) x 42" (1067 mm) x 21" (533 mm)

Material

Acrylic

Hydrotherapy

- Single-speed whirlpool offers six fully adjustable hydro-massage jets for water flow and direction.
- Pump with air switch for whirlpool.



Drop-in

Recommended Accessories

K-11677 Bath Drain
K-1491 Bath/Whirlpool Pillow
K-1601 Bath/Whirlpool Footstop
K-577 Undermount Install Kit
K-24916 Wireless Music Kit
K-9696 Whirlpool 6-Jet Trim Kit
K-37382 45" Rough-in Cable Bath Drain



Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E162 UL 1795 Greenguard UL 2818 - Gold CARB P2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond





Sunward®

6' Whirlpool Bath K-1164-W1

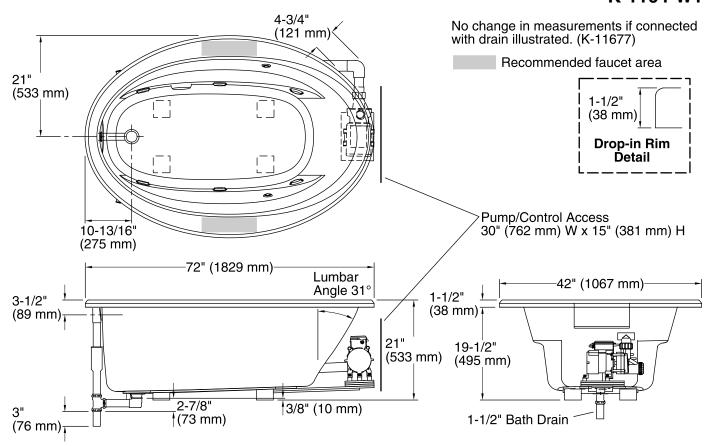

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Heated 120 V, 15 A, 60 Hz

Surface:

Technical Information

All product dimensions are nominal.

Installation: Drop-in Drain location: End

Basin area, bottom: 55-1/4" x 23-1/2" (1403 mm x 597 mm) Basin area, top: 64-1/2" x 32" (1638 mm x 813 mm)

Weight: 118 lbs (53.5 kg)
Minimum floor load: 37 lbs/ft² (180.6 kg/m²)

Water depth: 15" (381 mm)
Water capacity: 75 gal (283.9 L)

Template: Drop-in, 1042557-7, required, included

Electrical component Pump: 120 V, 7 A, 60 Hz

rating: Heated Surface: 120 V, 0.5 A, 60 Hz, 65

W

Pump speed: Single

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

