



Memoirs®

5.5' Bath

K-1169-W1



Features

- Center drain.
- 66" (1676 mm) x 42" (1067 mm) x 22" (559 mm)
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Integral lumbar support.
- Coordinates with other products in the Memoirs collection.

Material

- Acrylic

Installation

- Drop-in

Recommended Accessories

K-1491 Bath/Whirlpool Pillow
K-1601 Bath/Whirlpool Footstop
K-7161-AF Bath Drain
K-7213 27" Cable Bath Drain
K-7214 27" Cable Bath Drain
K-24916 Wireless Music Kit



Codes/Standards

CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
CSA C22.2 No. 218.2
Greenguard UL 2818 - Gold
CARB P2






KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

| | | |
|--------------------------------------------------------------------------------------|----|---------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 47 | Almond |
|  | NY | Dune |
|  | G9 | Sandbar |

USA/Canada: 1-800-4KOHLER (1-800-456-4537)


Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

1-13-2017 03:43

THE BOLD LOOK
OF **KOHLER®**

No change in measurements if connected with drain illustrated. (K-7161-AF)

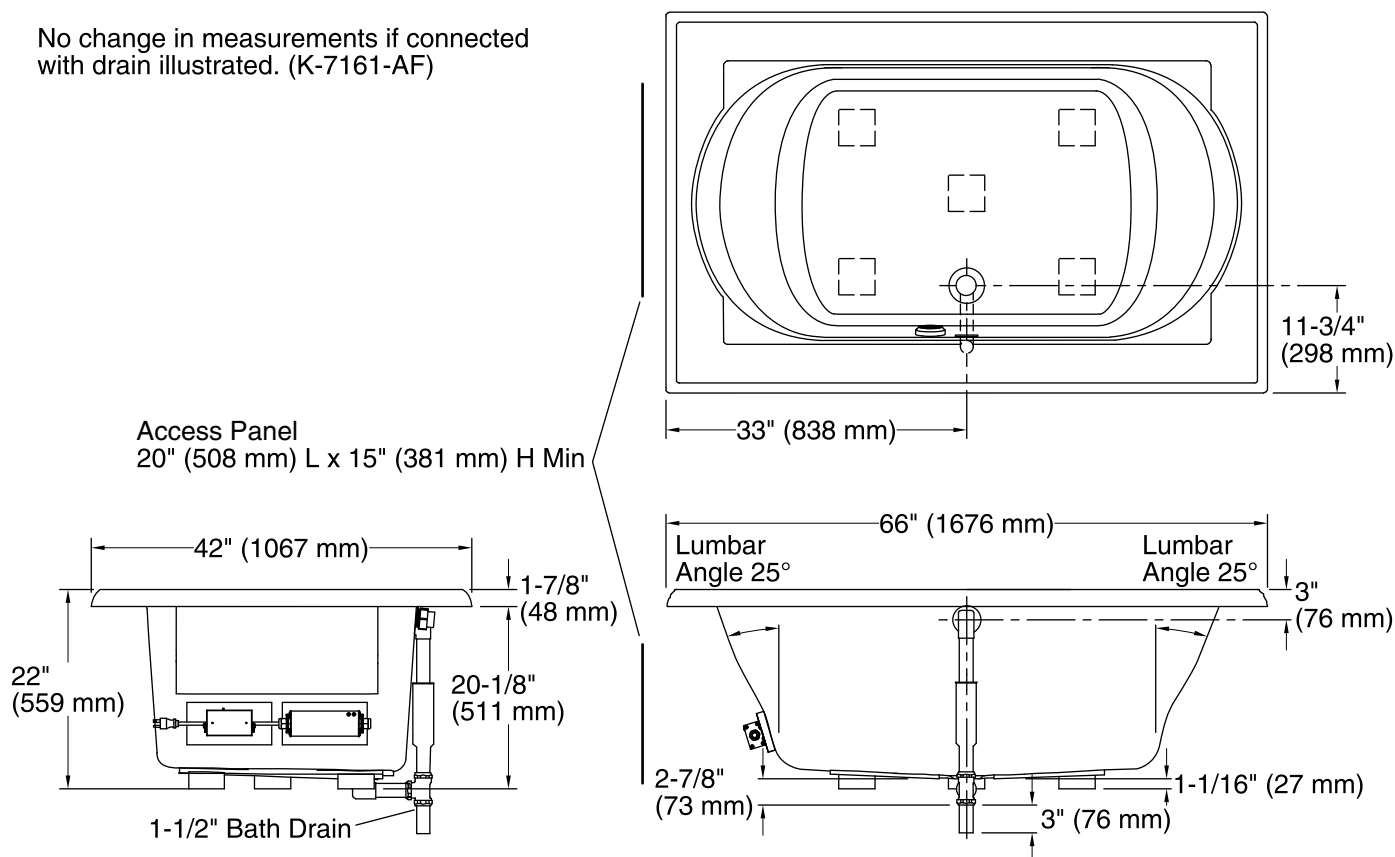

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Heated Surface: 120 V, 15 A

Technical Information

All product dimensions are nominal.

| | |
|------------------------------|---------------------------------------------------|
| Installation: | Drop-in |
| Drain location: | Center rear |
| Basin area, bottom: | 42" x 27" (1067 mm x 686 mm) |
| Basin area, top: | 54" x 30" (1372 mm x 762 mm) |
| Weight: | 80 lbs (36.3 kg) |
| Minimum floor load: | 40 lbs/ft ² (195.3 kg/m ²) |
| Water depth: | 16" (406 mm) |
| Water capacity: | 81 gal (306.6 L) |
| Cutout: | Drop-in, 64-1/2" x 40-1/2" (1638 mm x 1029 mm) |
| Electrical component rating: | Heated Surface: 120 V, 0.5 A, 60 Hz, 65 W |
| Minimum flat for door: | 4-1/4" (108 mm) |

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

If installing a rim-mount faucet, make sure there is no interference with drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.