



Purist®

6' Bath

K-1190



Features

- End drain.
- Overflows into horizontal overflow drain for maximum bathing depth.
- Integral lumbar support.
- Coordinates with other products in the Purist® collection.
- 72" (1829 mm) x 46" (1168 mm) x 25-3/16" (640 mm)

Material

- Acrylic

Installation

- Drop-in or under-mount.

Required Accessories

K-7273 Bath Drain

Recommended Accessories

K-24916 Wireless Music Kit
K-589 Under-mount Installation Kit
K-923 Bath Filler
K-1491 Bath/Whirlpool Pillow
K-1601 Bath/Whirlpool Footstop
K-T12885-4
K-T314-4M
K-T398-4 Bath Faucet Trim
K-T6906-4
K-T954-4



Codes/Standards

CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
Greenguard UL 2818 - Gold




KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

| | | |
|--|----|---------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 47 | Almond |

USA/Canada: 1-800-4KOHLER (1-800-456-4537)




Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

12-20-2016 03:31

THE BOLD LOOK
OF **KOHLER®**

No change in measurements if connected with drain illustrated. (K-7273)

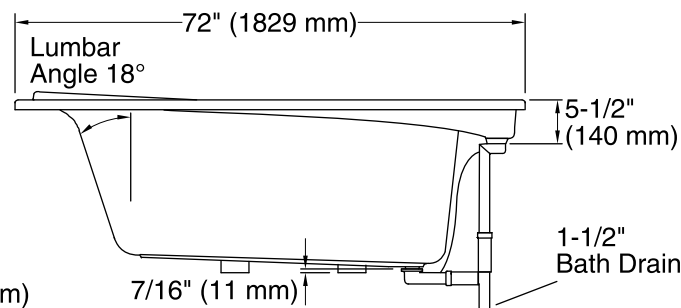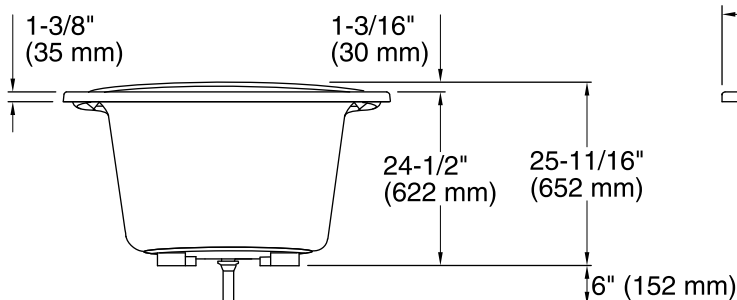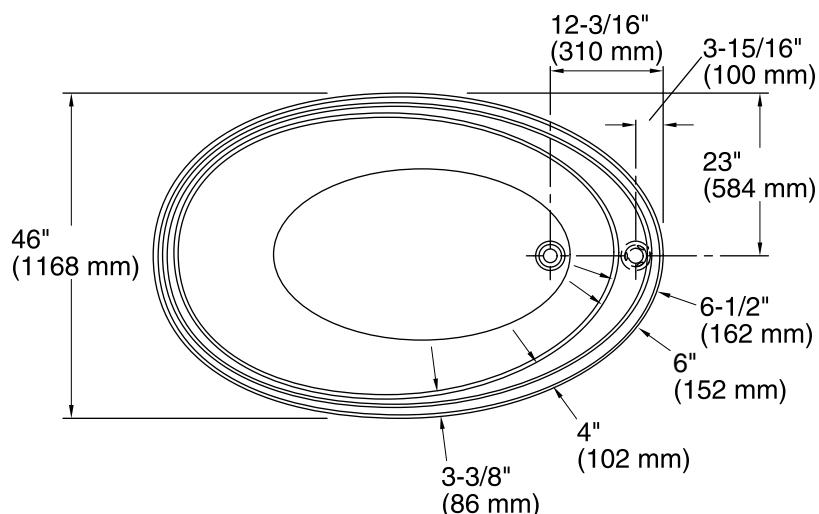

Technical Information

All product dimensions are nominal.

| | |
|------------------------|--|
| Installation: | Drop-in, Under-mount |
| Drain location: | End |
| Basin area, bottom: | 45" x 25-1/2" (1143 mm x 648 mm) |
| Basin area, top: | 63" x 31-1/2" (1600 mm x 800 mm) |
| Weight: | 115 lbs (52.2 kg) |
| Minimum floor load: | 48 lbs/ft ² (234.4 kg/m ²) |
| Water depth: | 21" (533 mm) |
| Water capacity: | 115 gal (435.3 L) |
| Template: | Top-mount/Under-mount, 1016369-7, required, included |
| Minimum flat for door: | 0" (0 mm) |

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.