



# Mariposa®

## 5.5' Whirlpool Bath

### K-1224-W1



#### Features

- End drain.
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Integral lumbar support and armrests for comfort.
- Textured bottom surface.
- 66" (1676 mm) x 35-7/8" (914 mm) x 20" (508 mm)

#### Material

- Acrylic

#### Hydrotherapy

- Single-speed whirlpool offers 5 fully adjustable hydro-massage jets for water flow and direction.
- Pump with air switch for whirlpool.

#### Installation

- Drop-in

#### Recommended Accessories

K-1234 Apron  
K-7161-AF Bath Drain  
K-9695 5-Jet Trim Kit  
K-24916 Wireless Music Kit  
K-37380 30" Rough-in Cable Bath Drain  
K-37383 30" Rough-in Cable Bath Drain



#### Codes/Standards






ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
Greenguard UL 2818 - Gold  
CARB P2


#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Color/Finishes


*Color tiles intended for reference only.*

| Color  | Code | Description |
|--|------|-------------|
|  | 0    | White       |
|  | 96   | Biscuit     |
|  | 47   | Almond      |
|  | NY   | Dune        |
|  | G9   | Sandbar     |


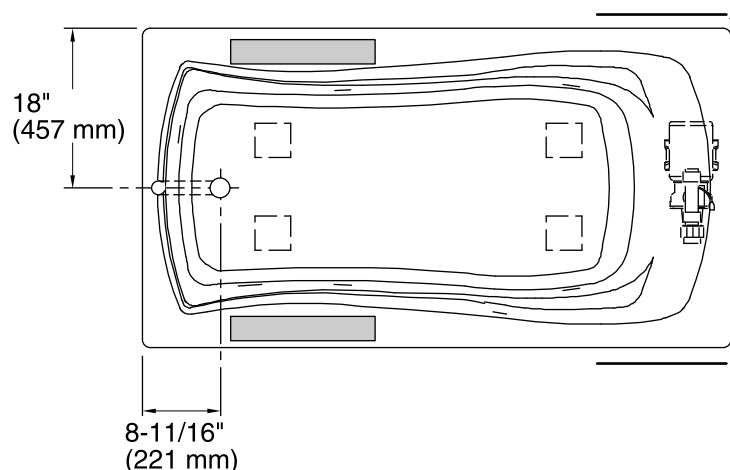


No change in measurements if connected with drain illustrated. (K-7161-AF)

■ Recommended Faucet Area



Pump/Control Access  
(if apron is not used)  
30\" (762 mm) W x 15\" (381 mm) H

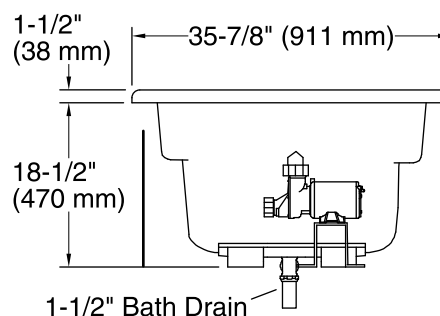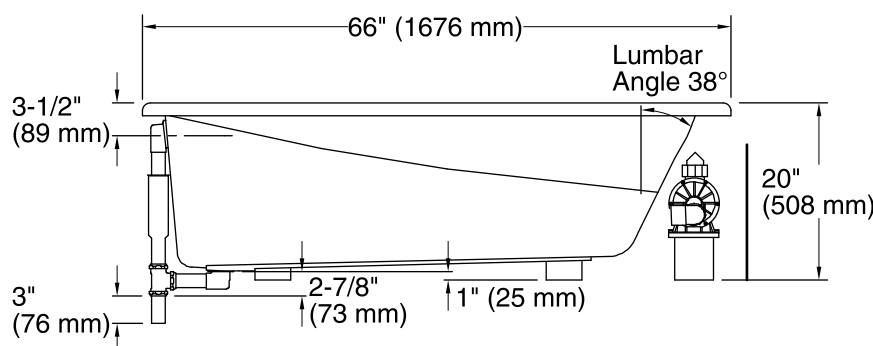

### Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Heated Surface: 120 V, 15 A, 60 Hz

### Technical Information

All product dimensions are nominal.

|                              |  |
|------------------------------|--|
| Installation:                | Drop-in  |
| Drain location:              | End  |
| Basin area, bottom:          | 48\" x 24\" (1219 mm x 610 mm)   |
| Basin area, top:             | 59\" x 30\" (1499 mm x 762 mm)   |
| Weight:                      | 116 lbs (52.6 kg)  |
| Minimum floor load:          | 48 lbs/ft <sup>2</sup> (234.4 kg/m <sup>2</sup> )                      |
| Water depth:                 | 14\" (356 mm)  |
| Water capacity:              | 67 gal (253.6 L)   |
| Cutout:                      | Drop-in, 64\" x 34\" (1626 mm x 864 mm)                                |
| Electrical component rating: | Pump: 120 V, 7.5 A, 60 Hz<br>Heated Surface: 120 V, 1.1 A, 60 Hz, 65 W |
| Pump speed:                  | Single   |

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24\" (610 mm) of each component.

If installing a rim-mount faucet, make sure there is no interference with drain overflow or whirlpool system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.