

# **Devonshire®**

5' Whirlpool Bath K-1357-W1



### **Features**

- End drain.
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Integral lumbar support and armrests for comfort.
- Textured bottom surface.
- Coordinates with other products in the Devonshire® collection.
- 60" (1524 mm) x 32" (813 mm) x 20" (508 mm)

### Material

Acrylic

### **Hydrotherapy**

 Single-speed whirlpool offers eight fully adjustable hydro-massage jets for water flow and direction.

#### Installation

Drop-in

### **Recommended Accessories**

K-24916 Wireless Music Kit K-7161-AF Bath Drain K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop



### Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 Greenguard UL 2818 - Gold CARB P2

## **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

### **Available Color/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar






## **Devonshire®**

5' Whirlpool Bath K-1357-W1

No change in measurements if connected with drain illustrated. (K-7161-AF)

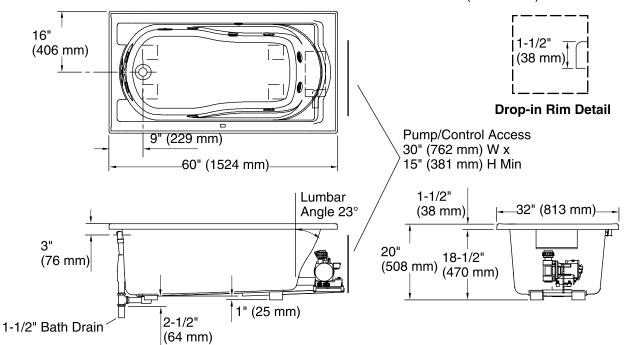

### **Required Electrical Service**

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Heated 120 V, 15 A, 60 Hz

Surface:

### **Technical Information**

All product dimensions are nominal.

Installation: Drop-in Drain location: End

Basin area, bottom: 42" x 20" (1067 mm x 508 mm) Basin area, top: 51" x 24" (1295 mm x 610 mm)

Weight: 106 lbs (48.1 kg)
Minimum floor load: 47 lbs/ft² (229.5 kg/m²)

Water depth: 14" (356 mm)
Water capacity: 60 gal (227.1 L)

Electrical component Pump: 120 V, 7 A, 60 Hz

rating: Heated Surface: 120 V, 0.5 A, 60 Hz

Minimum flat for door: 2-1/2" (64 mm)

#### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

