

Memoirs®

6' VibrAcoustic® Bath K-1418-VBW



Features

- Center drain.
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- VibrAcoustic® technology emits sound waves and offers a surround sound experience.
- Six transducers and a control amplifier with 25' (7.6 m) of wiring.
- High-resolution color screen in polished chrome.
- Integral lumbar support.
- Textured bottom surface.
- Coordinates with other products in the Memoirs® collection.
- 72" (1829 mm) x 42" (1067 mm) x 22" (559 mm)

Material

Acrylic

Installation

Drop-in

Recommended Accessories

1184460 Kit, UI Mounting K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-7161-AF Bath Drain K-7213 27" Cable Bath Drain K-7214 27" Cable Bath Drain K-7265 Clearflo Bath Drain

Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2 Greenguard UL 2818 - Gold CARB P2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar






Memoirs®

6' VibrAcoustic® Bath


K-1418-VBW

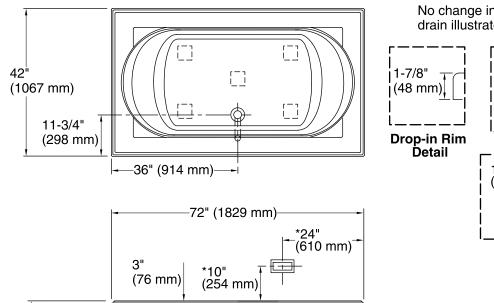


1-1/2"

Bath Drain

No change in measurements if connected with drain illustrated. (K-7161-AF)





Required Electrical Service

20-1/8"

(559 mm) (511 mm)

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Q

1-1/16" (27 mm)

Amplifier, Heated

120 V. 15 A

Surface:

22"

Technical Information

All product dimensions are nominal.

Installation: Drop-in Drain location: Center

Basin area, bottom: 48" x 27" (1219 mm x 686 mm) Basin area, top: 60" x 30" (1524 mm x 762 mm)

Weight: 97 lbs (44 kg)

Minimum floor load: 44 lbs/ft² (214.8 kg/m²)

Water depth: 16" (406 mm)
Water capacity: 94 gal (355.8 L)

Cutout: Drop-in, 70-1/2" x 40-1/2" (1791 mm x

1029 mm)

Electrical component Amplifier: 120 V, 50/60 Hz

rating: Heated Surface: 120 V, 0.5 A, 50/60 Hz,

65 W

Minimum flat for door: 0" (0 mm)

Notes

*Recommended User

Interface Location

Lumbar

Angle 25°

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

If installing a rim-mount faucet, make sure there is no interference with drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

Control amplifier fits 16" (406 mm) center studs. 25' (7.6 m) cables are included.

