

### Features

- Center drain.
- Integral lumbar support.
- Coordinates with other products in the Portrait<sup>®</sup> collection.
- 67" (1702 mm) x 42" (1067 mm) x 22" (559 mm)

## Material

Acrylic

### Installation

Drop-in

## **Recommended Accessories**

K-7161-AF Bath Drain T16122 K-300-K High Flow Bath Valve K-24916 Wireless Music Kit K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-7213 27" Cable Bath Drain K-7214 27" Cable Bath Drain K-7265 Clearflo Bath Drain K-110-4 K-110-9B K-6905-4 T125-3 K-T125-4 K-T125-9B K-T16119-4 K-T16119-4A K-T16122-4 Bath Faucet Trim K-T16122-4A Bath Faucet Trim K-T6906-4



**Portrait**®



# **Codes/Standards**

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold

### **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.


## **Available Color/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond





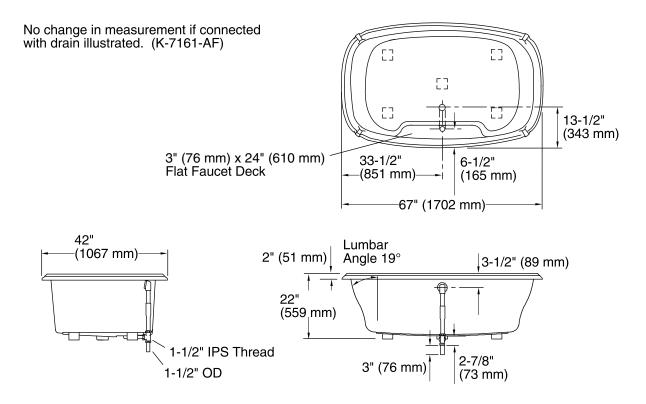

## **Technical Information**

All product dimensions are nominal.			
Installation:	Drop-in		
Drain location:	Center		
Basin area, bottom:	50" x 29" (1270 mm x 737 mm)		
Basin area, top:	61" x 32" (1549 mm x 813 mm)		
Weight:	80 lbs (36.3 kg)		
Minimum floor load:	47 lbs/ft² (229.5 kg/m²)		
Water depth:	16" (406 mm)		
Water capacity:	98 gal (371 L)		
Template:	Drop-in, 113311-7, required, included		
Minimum flat for door:	0" (0 mm)		

### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

