



# Portrait® 5.5' Whirlpool Bath K-1457-CT



## Features

- Center drain.
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood.
- Integral lumbar support.
- Coordinates with other products in the Portrait® collection.
- 67" (1702 mm) x 42" (1067 mm) x 22" (559 mm)

## Material

- Acrylic

## Hydrotherapy

- Effervescent bubbles with eight ports.
- Variable-speed pump for adjusting hydromassage intensity.
- Built-in 1500 W heater.
- Lighted keypad control.
- Remote control.

## Installation

- Drop-in

## Recommended Accessories

K-1491 Bath/Whirlpool Pillow  
K-1601 Bath/Whirlpool Footstop  
K-7161-AF Bath Drain  
K-T16122-4 Bath Faucet Trim  
K-24916 Wireless Music Kit



## Codes/Standards


ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2  
Greenguard UL 2818 - Gold  
CARB P2

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

No change in measurements if connected with drain illustrated. (K-7161-AF)

■ Recommended Faucet Area

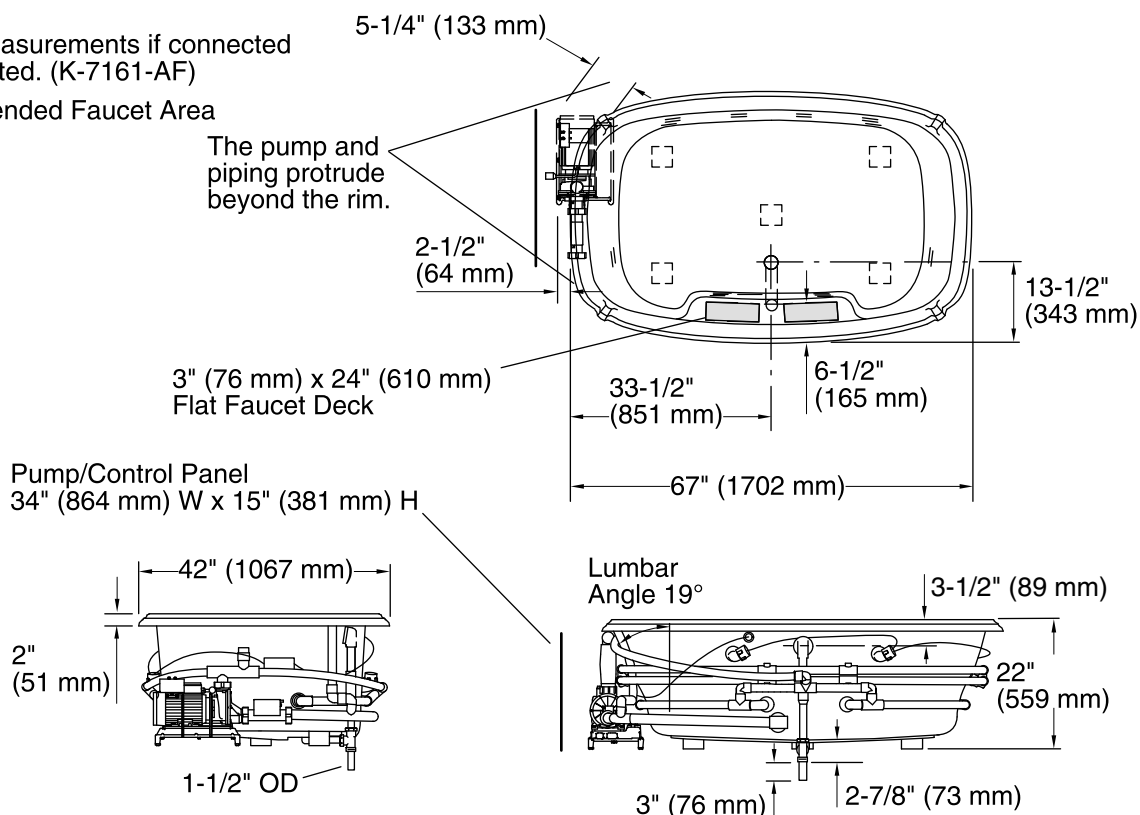

## Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Heater: 240 V, 20 A, 50/60 Hz

## Technical Information

All product dimensions are nominal.

|                              |  |
|------------------------------|--|
| Installation:                | Drop-in  |
| Drain location:              | Center   |
| Basin area, bottom:          | 50" x 29" (1270 mm x 737 mm)                                   |
| Basin area, top:             | 61" x 32" (1549 mm x 813 mm)                                   |
| Weight:                      | 130 lbs (59 kg)  |
| Minimum floor load:          | 51 lbs/ft² (249 kg/m²)   |
| Water depth:                 | 16" (406 mm)   |
| Water capacity:              | 100 gal (378.5 L)  |
| Template:                    | Drop-in, 113311-7, required, included                          |
| Electrical component rating: | Pump: 240 V, 11 A, 50/60 Hz<br>Heater: 240 V, 50/60 Hz, 1500 W |
| Pump speed:                  | Variable   |
| Minimum flat for door:       | 0" (0 mm)  |

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.