



Greek®

4' Whirlpool Bath

K-1492-H2



Features

- End drain.
- Integral lumbar support and armrests for comfort.
- 48" (1219 mm) x 32" (813 mm) x 23-3/8" (594 mm)

Material

- Acrylic

Hydrotherapy

- Four fully adjustable Flexjet™ hydrotherapy jets for water flow and direction.
- Variable-speed pump for adjusting hydromassage intensity.
- Built-in 1500 W heater.
- Lighted keypad control.

Installation

- Drop-in

Required Accessories

K-9694 4-Jet Trim Kit

Recommended Accessories

K-7166-AF Bath Drain

K-24916 Wireless Music Kit



Codes/Standards




ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
CSA C22.2 No. 218.2
Greenguard UL 2818 - Gold
CARB P2


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	0	White
	96	Biscuit
	47	Almond

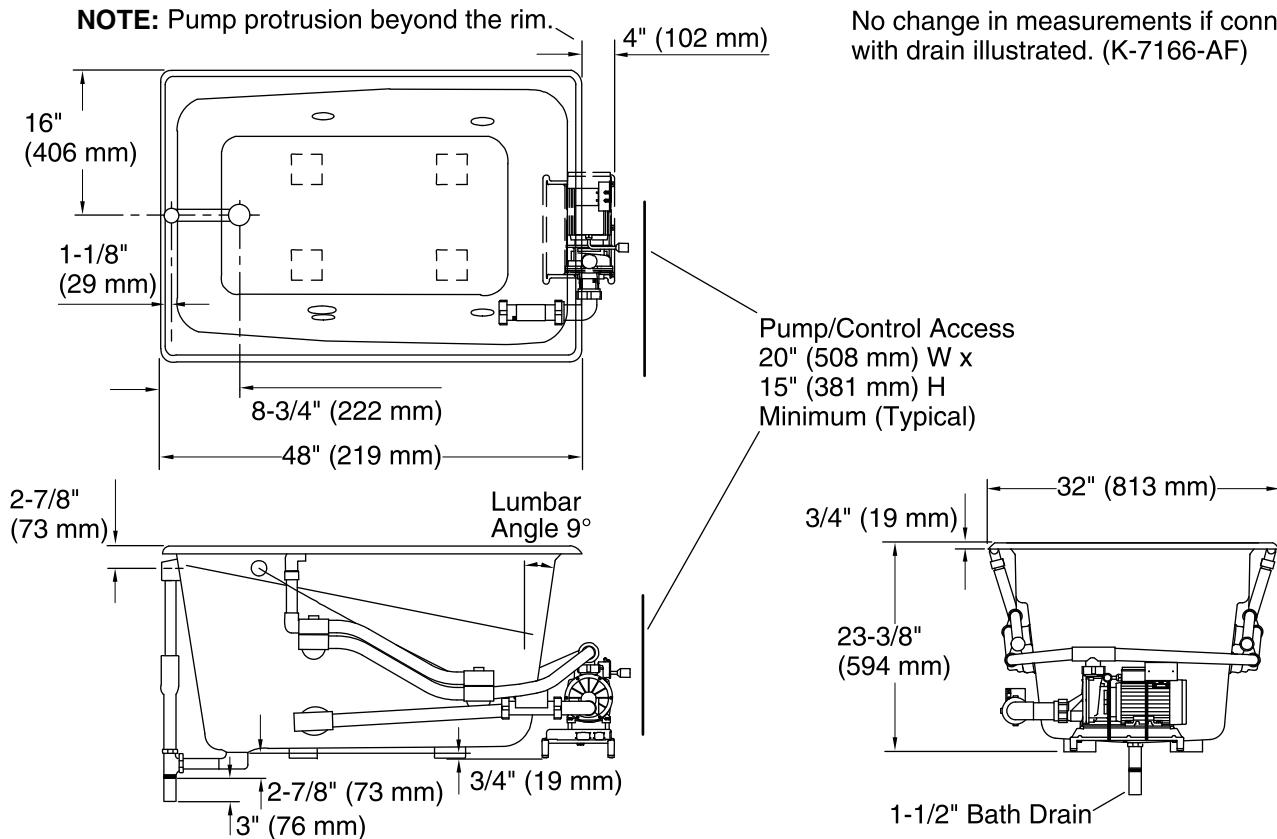

No change in measurements if connected with drain illustrated. (K-7166-AF)

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump: 240 V, 20 A, 50/60 Hz

Technical Information

All product dimensions are nominal.

Installation: Drop-in
 Drain location: End
 Basin area, bottom: 36" x 20-1/2" (914 mm x 521 mm)
 Basin area, top: 42" x 26" (1067 mm x 660 mm)
 Weight: 103 lbs (46.7 kg)
 Minimum floor load: 65 lbs/ft² (317.4 kg/m²)
 Water depth: 17-1/2" (445 mm)
 Water capacity: 68 gal (257.4 L)
 Cutout: Drop-in, 46-1/2" x 30-1/2" (1181 mm x 775 mm)
 Electrical component rating: Pump: 240 V
 Pump speed: Variable
 Minimum flat for door: 0" (0 mm)

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

NOTE: Pump protrudes beyond rim.