

## Coralais® Kitchen Sink Base Faucet K-15889-K

#### **Features**

- Reversible guarter-turn washerless ceramic disc valves.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- High-arch swing spout offers superior clearance for filling pots and cleaning.
- Two lever handles offer separate control of hot and cold water.
- 9" (229 mm) swing spout reach.
- For 8" (203 mm) centers
- Matching finish sidespray.
- 1.8 gal/min (6.8l/min) maximum flow rate [max at 60 psi (4.14 bar)].
- Meets CalGreen requirements for kitchen faucets.

#### Material

- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.

#### Installation

- Four-hole installation.
- Requires K-15850-4M lever handles (sold separately)
- Lower flow aerator options are available (refer to the Kohler Price Book).

### Required Accessories

K-15850-4M Decorative Lever Handles

#### **Optional Accessories**

1030920 Side Spray Deep Rough-In



ADA

#### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA

ICC/ANSI A117.1

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### **Available Color/Finishes**

Color tiles intended for reference only.


**Color Code Description** 

CP Polished Chrome





# Coralais® Kitchen Sink Base Faucet K-15889-K

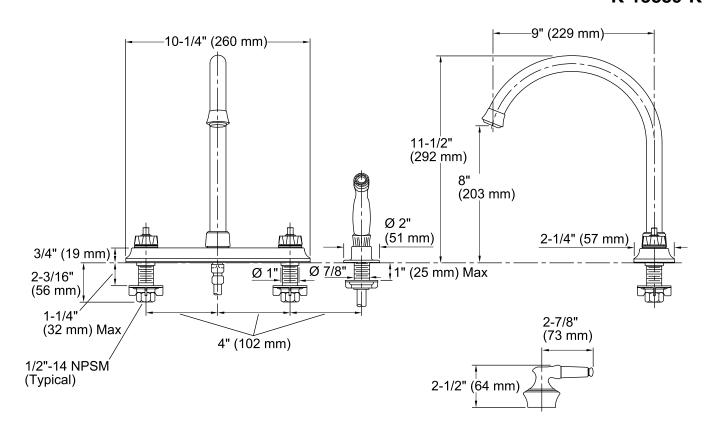

#### **Technical Information**

All product dimensions are nominal.

Spout:

Spout reach: 9" (229 mm)

Faucet:

Flow rate: 1.8 gal/min (6.8 l/min)

Pressure: 60 psi (4.1 bar)

#### **Notes**

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.

