



**Aliento®**

5.5' Bath

**K-1805**



### Features

- Center drain.
- Slotted overflow for deep soaking.
- Integral lumbar support.
- 65-13/16" (1672 mm) x 36" (914 mm) x 25-3/16" (640mm)

### Material

- Lithocast®

### Installation

- Freestanding

### Recommended Accessories

K-923 Bath Filler

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/Whirlpool Footstop



### Codes/Standards

ASME A112.18.2/CSA B125.2

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

Greenguard UL 2818 - Gold

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

|                                                                                      |     |             |
|--------------------------------------------------------------------------------------|-----|-------------|
|  | HW1 | Honed White |
|--------------------------------------------------------------------------------------|-----|-------------|




USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com).

1-13-2017 04:21

THE BOLD LOOK  
OF **KOHLER®**

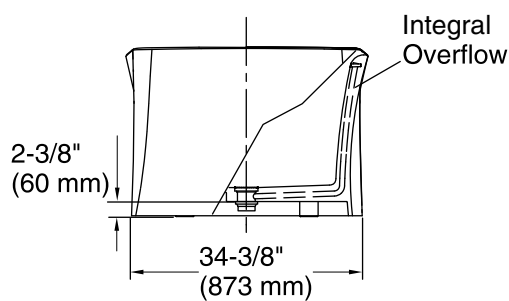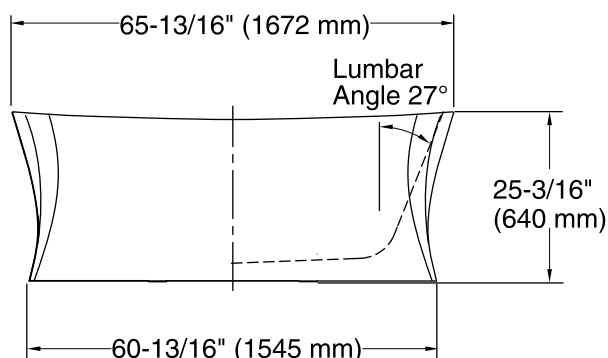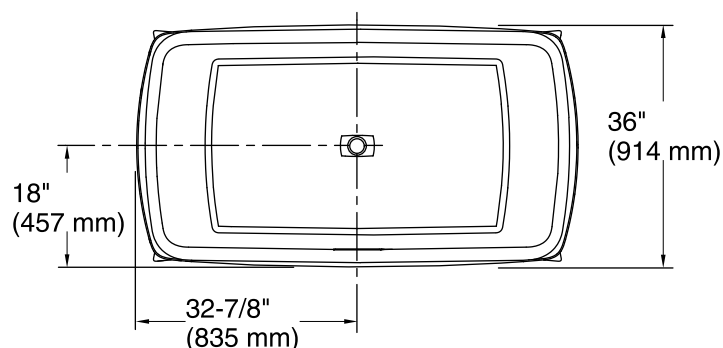

### Technical Information

All product dimensions are nominal.

|                        |                                                     |
|------------------------|-----------------------------------------------------|
| Installation:          | Freestanding                                        |
| Drain location:        | Center                                              |
| Basin area, bottom:    | 45-1/2" x 26" (1156 mm x 660 mm)                    |
| Basin area, top:       | 63-1/4" x 30-3/16" (1607 mm x 767 mm)               |
| Weight:                | 524 lbs (237.7 kg)                                  |
| Minimum floor load:    | 91.7 lbs/ft <sup>2</sup> (447.7 kg/m <sup>2</sup> ) |
| Water depth:           | 18-1/2" (470 mm)                                    |
| Water capacity:        | 115 gal (435.3 L)                                   |
| Minimum flat for door: | 0" (0 mm)                                           |

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.