



Underscore® 5.5' Bubblemassage™ Whirlpool Bath K-1822-XH2G



Features

- End drain.
- Slotted overflow allows for deep soaking.
- Integral lumbar support and armrests for comfort.
- 66" (1676 mm) x 32" (813 mm) x 22" (559 mm)

Material

- Acrylic

Hydrotherapy

- 118-122 BubbleMassage™ airjets.
- Variable-speed pump for adjusting hydromassage intensity.
- Automatic purge cycles remove residual water from air channels after use.
- Zones of Control™ feature allows you to target airjet massage to back, midsection, or feet.
- Pump with air switch for whirlpool.
- Single-speed whirlpool offers eight fully adjustable hydro-massage jets for water flow and direction.
- Built-in 1500 W heater.
- Lighted keypad control.

Installation

- Drop-in or under-mount.

Required Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Accessories

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/Whirlpool Footstop

K-9498 3" Keypad Trim

K-24916 Wireless Music Kit

K-550 Under-mount Installation Kit



Codes/Standards

ASME A112.19.7/CSA B45.10

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

UL 1795

CSA C22.2 No. 218.2

Greenguard UL 2818 - Gold











CARB P2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

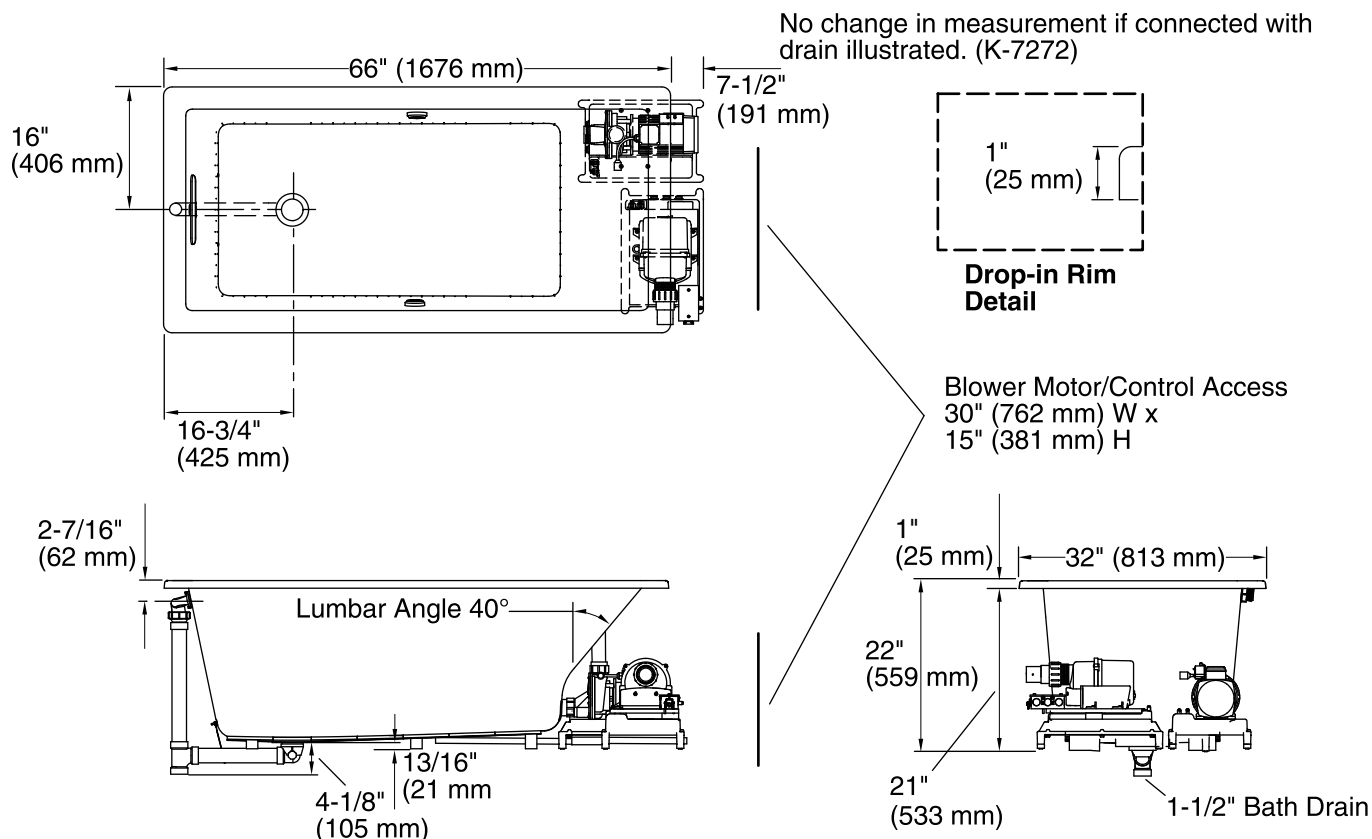
USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

1-13-2017 04:22

THE BOLD LOOK
OF **KOHLER**®



Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Blower, Pump: 240 V, 20 A, 50/60 Hz

Technical Information

All product dimensions are nominal.

Installation: Drop-in
Drain location: Reversible
Basin area, bottom: 44-1/2" x 22-5/16" (1130 mm x 567 mm)
Basin area, top: 59-5/8" x 25-1/2" (1514 mm x 648 mm)
Weight: 172 lbs (78 kg)
Minimum floor load: 61.5 lbs/ft² (300.3 kg/m²)
Water depth: 18" (457 mm)
Water capacity: 85.8 gal (324.8 L)
Cutout: Drop-in, 65-1/2" x 31-1/2" (1664 mm x 800 mm)
Electrical component rating: Blower: 240 V, 5 A, 50/60 Hz
Pump: 240 V, 11 A, 50/60 Hz
Minimum flat for door: 2-1/2" (64 mm)

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

IMPORTANT! Dry fit the drain assembly prior to installing the bath. The bath cannot be installed with all drain components attached.

The pump base extends 7-1/2" (191 mm) beyond the edge of the rim. Modify the framing as needed.