



Underscore®

5' BubbleMassage™ Whirlpool Bath

K-1849-XH2G



Features

- End drain.
- Integral lumbar support.
- Slotted overflow allows for deep soaking.
- 60" (1524 mm) x 36" (914 mm) x 21" (533 mm)

Material

- Acrylic

Hydrotherapy

- 118-122 BubbleMassage™ airjets.
- Automatic purge cycles remove residual water from air channels after use.
- Variable-speed blower for adjusting hydromassage intensity.
- Variable-speed pump for adjusting hydromassage intensity.
- Eight fully adjustable Flexjet™ hydrotherapy jets for water flow and direction.
- Zones of Control™ feature allows you to target airjet massage to back, midsection, or feet.
- Built-in 1500 W heater.
- Lighted keypad control.

Installation

- Drop-in or under-mount.
- Kit required for under-mount installation (sold separately).

Required Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Accessories

K-9497 2-1/2" Keypad Trim

K-9698 Flexjet® Whirlpool Trim Kit

K-24916 Wireless Music Kit

K-534 Under-mount Installation Kit

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/Whirlpool Footstop



Codes/Standards

ASME A112.19.7/CSA B45.10

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

UL 1795

CSA C22.2 No. 218.2

Greenguard UL 2818 - Gold











CARB P2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™


USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

1-13-2017 04:24

THE BOLD LOOK
OF **KOHLER**®

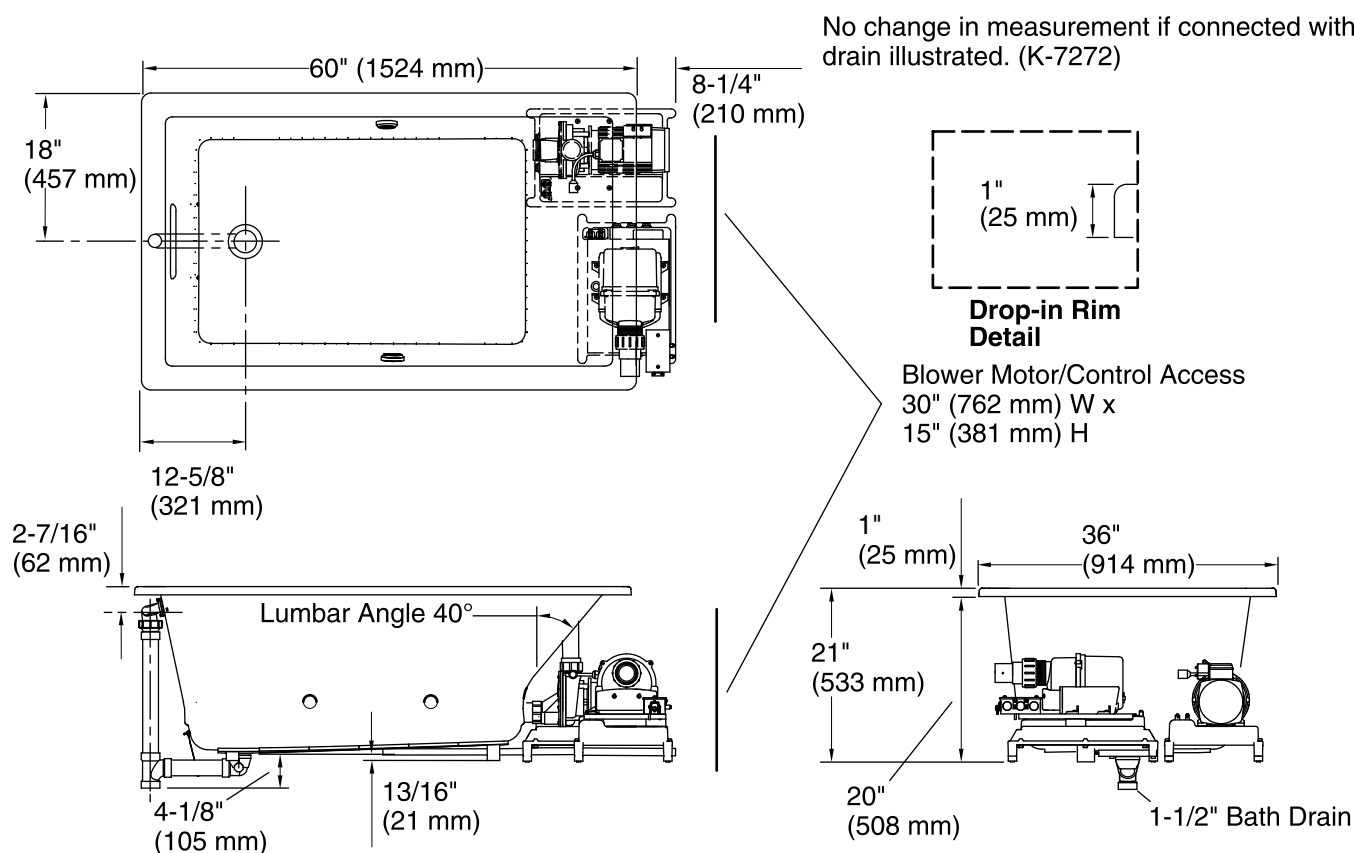

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Blower, 240 V, 20 A, 50/60 Hz
Heater:

Technical Information

All product dimensions are nominal.

Installation: Drop-in
Drain location: End
Basin area, bottom: 39-9/16" x 24-11/16" (1005 mm x 627 mm)
Basin area, top: 53-5/8" x 29-1/2" (1362 mm x 749 mm)
Weight: 170 lbs (77.1 kg)
Minimum floor load: 56.8 lbs/ft² (277.3 kg/m²)
Water depth: 17-1/8" (435 mm)
Water capacity: 81.1 gal (307 L)
Template: Under-mount, K-534, not required, not included
Electrical component rating: Pump: 240 V, 11 A, 50/60 Hz
Blower: 240 V, 5 A, 50/60 Hz, 300 W
Heater: 240 V, 50/60 Hz, 1500 W

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

IMPORTANT! Dry fit the drain assembly prior to installing the bath. The bath cannot be installed with all drain components attached.

The pump base extends 8-1/4" (210 mm) beyond the edge of the rim. Modify the framing as needed.