

Ballast®

48" x 36" Shower Base **K-1935**

Features

- Integral flange.
- Flange helps prevent water from seeping behind wall and simplifies alcove installation.
- Center drain.
- Low threshhold shower base.
- One-piece construction.
- Compliments traditional and contemporary bathroom designs.
- Coordinates with Choreograph[™] walls.

Material

Resin concrete core with acrylic surface.

Installation

Alcove

Required Accessories

K-706008-D3 Frameless Sliding Shower Door

or

K-706008-L Frameless Sliding Shower Door

or

K-706010-L Frameless Sliding Shower Door



CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662

KOHLER® One-Year Limited Warranty

dillo

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

0 White










48" x 36" Shower Base **K-1935**

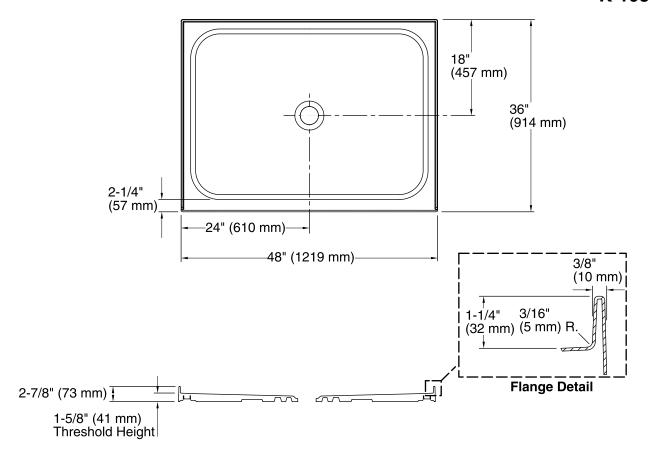

Technical Information

All product dimensions are nominal.

Installation:

3-Wall Alcove

Drain location: Center

Drain hole diameter: 3-3/8" (86 mm)
Weight: 107 lbs (48.5 kg)
Minimum floor load: 12 lbs/ft² (58.6 kg/m²)

Minimum flat for door: 2" (51 mm)

Threshold height: 1-5/8" (41 mm)

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

CAUTION: Risk of property damage and personal injury. Using this product without a shower door may cause water damage and may create a wet and potentially dangerous environment.

A shower door with a bottom track is required for this receptor. Kohler Co. shall not be responsible for problems encountered due to the installation and use of other manufacturer's shower doors.

Refer to Kohler Fixtures Price Book for complete list of required shower doors for this product.

