KOHLER_®

Features

- Integral flange.
- Right drain.
- Slotted overflow for deep soaking.
- Integral lumbar support.
- Coordinates with other products in the Archer® collection.

Installation

Alcove

Required Accessories

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Accessories

K-24916 Wireless Music Kit





Codes/Standards

CSA B45.5/IAPMO Z124 Greenguard UL 2818 - Gold ADA ICC/ANSI A117.1

KOHLER[®] One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	lce™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™



Archer® 5' Bath K-1946-R






Archer® 5' Bath **K-1946-R**

No change in measurements if connected with drain illustrated. (K-7272)

1-1/4" (32 mm) 1/2" (13 mm) R. 1/2" (13 mm) R. Integral Flange Detail

.30" (762 mm)

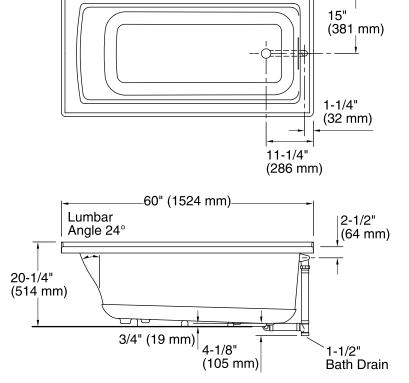

Technical Information

18"

(457 mm)

All product dimensions are nominal.			
Installation:	3-Wall Alcove		
Drain location:	Right		
Basin area, bottom:	45-1/8" x 19-11/16" (1146 mm x 500 mm)		
Basin area, top:	52-1/8" x 22-1/16" (1324 mm x 560 mm)		
Weight:	58 lbs (26.3 kg)		
Minimum floor load:	45 lbs/ft² (219.7 kg/m²)		
Water depth:	15-1/8" (384 mm)		
Water capacity:	57 gal (215.8 L)		
Minimum flat for door:	2" (51 mm)		

19"

(483 mm)

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

