



Archer®

5' VibrAcoustic® Bath

K-1947-VBR



Features

- Integral flange.
- Slotted overflow for deep soaking.
- Right drain.
- VibrAcoustic® technology emits sound waves and offers a surround sound experience.
- Six transducers and a control amplifier with 25' (7.6 m) of wiring.
- High-resolution color screen in polished chrome.
- Integral lumbar support.
- Coordinates with other products in the Archer® collection.
- 60" (1524 mm) x 30" (762 mm) x 19" (483 mm)

Material

- Acrylic

Installation

- Alcove

Required Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain



ADA

Codes/Standards

CSA B45.5/IAPMO Z124

UL 1795

Greenguard UL 2818 - Gold

ADA











ICC/ANSI A117.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

12-20-2016 04:25

THE BOLD LOOK
OF **KOHLER**®



5-5/8" (143 mm) 7/8" (22 mm)
3-1/2" (89 mm)

1-1/4" (32 mm)
1/2" (13 mm) R.

14-1/2" (368 mm) 3-3/16" (81 mm)
11-3/4" (298 mm)


Technical drawing of a trash can with the following dimensions:

- Lid width: 30" (762 mm)
- Main body height: 17-1/2" (445 mm)
- Total height: 19" (483 mm)

Technical drawing of a rectangular panel with dimensions and a hole. The panel is shown in a perspective view. The dimensions are as follows:

- Overall width: 15" (381 mm)
- Overall height: 11-1/4" (286 mm)
- Inner width: 11-1/4" (286 mm)
- Inner height: 11-1/4" (286 mm)

A hole is located on the right side of the panel, centered vertically. The hole is 1/4" (6 mm) in diameter. The distance from the right edge of the panel to the center of the hole is 1/4" (6 mm).

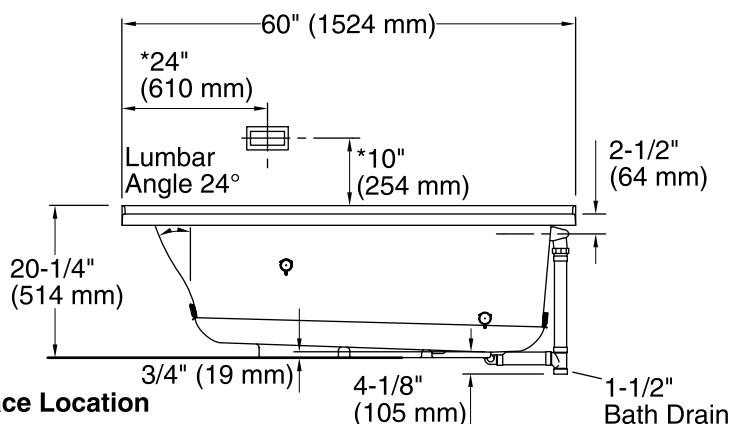

ADA compliant when installed to the specific requirements of these regulations.