



# Archer®

## 5.5' Bath

### K-1948-LA



#### Features

- Integral flange.
- Slotted overflow for deep soaking.
- Left drain.
- Integral apron.
- Integral lumbar support and armrests for comfort.
- Coordinates with other products in the Archer® collection.
- 66" (1676 mm) x 32" (813 mm) x 19" (483 mm)

#### Material

- Acrylic

#### Installation

- Alcove

#### Required Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain



ADA

#### Codes/Standards

CSA B45.5/IAPMO Z124

Greenguard UL 2818 - Gold

ADA











ICC/ANSI A117.1

#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Color/Finishes

*Color tiles intended for reference only.*

| Color  | Code | Description   |
|--|------|---------------|
|  | 0    | White         |
|  | 96   | Biscuit       |
|  | 47   | Almond        |
|  | NY   | Dune          |
|  | 95   | Ice™ Grey     |
|  | G9   | Sandbar       |
|  | 33   | Mexican Sand™ |
|  | K4   | Cashmere      |
|  | 58   | Thunder™ Grey |
|  | 7    | Black Black™  |

USA/Canada: 1-800-4KOHLER (1-800-456-4537)




Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com).

1-13-2017 04:30

THE BOLD LOOK  
OF **KOHLER**®

No change in measurements if connected with drain illustrated. (K-7272)

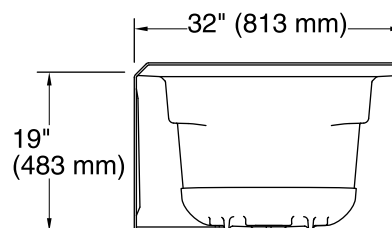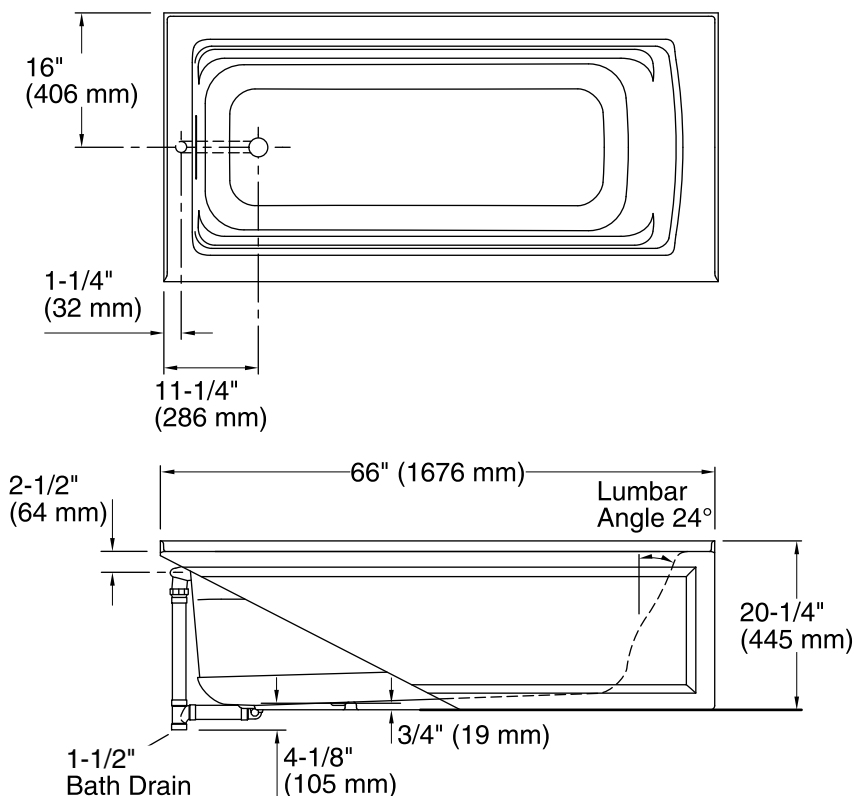

### Technical Information

All product dimensions are nominal.

|                        |  |
|------------------------|--|
| Installation:          | 3-Wall Alcove                          |
| Drain location:        | Left                                   |
| Basin area, bottom:    | 50-3/8" x 19-5/8" (1280 mm x 498 mm)   |
| Basin area, top:       | 57-5/16" x 24-1/16" (1456 mm x 611 mm) |
| Weight:                | 80 lbs (36.3 kg)                       |
| Minimum floor load:    | 45 lbs/ft² (219.7 kg/m²)               |
| Water depth:           | 15-5/16" (389 mm)                      |
| Water capacity:        | 66 gal (249.8 L)                       |
| Minimum flat for door: | 2-3/16" (55 mm)                        |

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.