



# Archer®

## 5.5' VibrAcoustic® Bath

### K-1949-VBW



#### Features

- End drain.
- Slotted overflow for deep soaking.
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- VibrAcoustic® technology emits sound waves and offers a surround sound experience.
- Six transducers and a control amplifier with 25' (7.6 m) of wiring.
- High-resolution color screen in polished chrome.
- Integral lumbar support and armrests for comfort.
- Coordinates with other products in the Archer® collection.
- 66" (1676 mm) x 32" (813 mm) x 19" (483 mm)

#### Material

- Acrylic

#### Installation

- Drop-in

#### Required Accessories

- K-7271 Brass Slotted Overflow Bath Drain  
or  
K-7272 PVC Slotted Overflow Bath Drain



ADA

#### Codes/Standards











CSA B45.5/IAPMO Z124  
UL 1795  
CSA C22.2 No. 218.2  
Greenguard UL 2818 - Gold  
ADA  
ICC/ANSI A117.1  
CARB P2

#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Color/Finishes

*Color tiles intended for reference only.*

| Color  | Code | Description   |
|--|------|---------------|
|  | 0    | White         |
|  | 96   | Biscuit       |
|  | 47   | Almond        |
|  | NY   | Dune          |
|  | 95   | Ice™ Grey     |
|  | G9   | Sandbar       |
|  | 33   | Mexican Sand™ |
|  | K4   | Cashmere      |
|  | 58   | Thunder™ Grey |
|  | 7    | Black Black™  |


USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com).

12-20-2016 04:29

THE BOLD LOOK  
OF **KOHLER**®

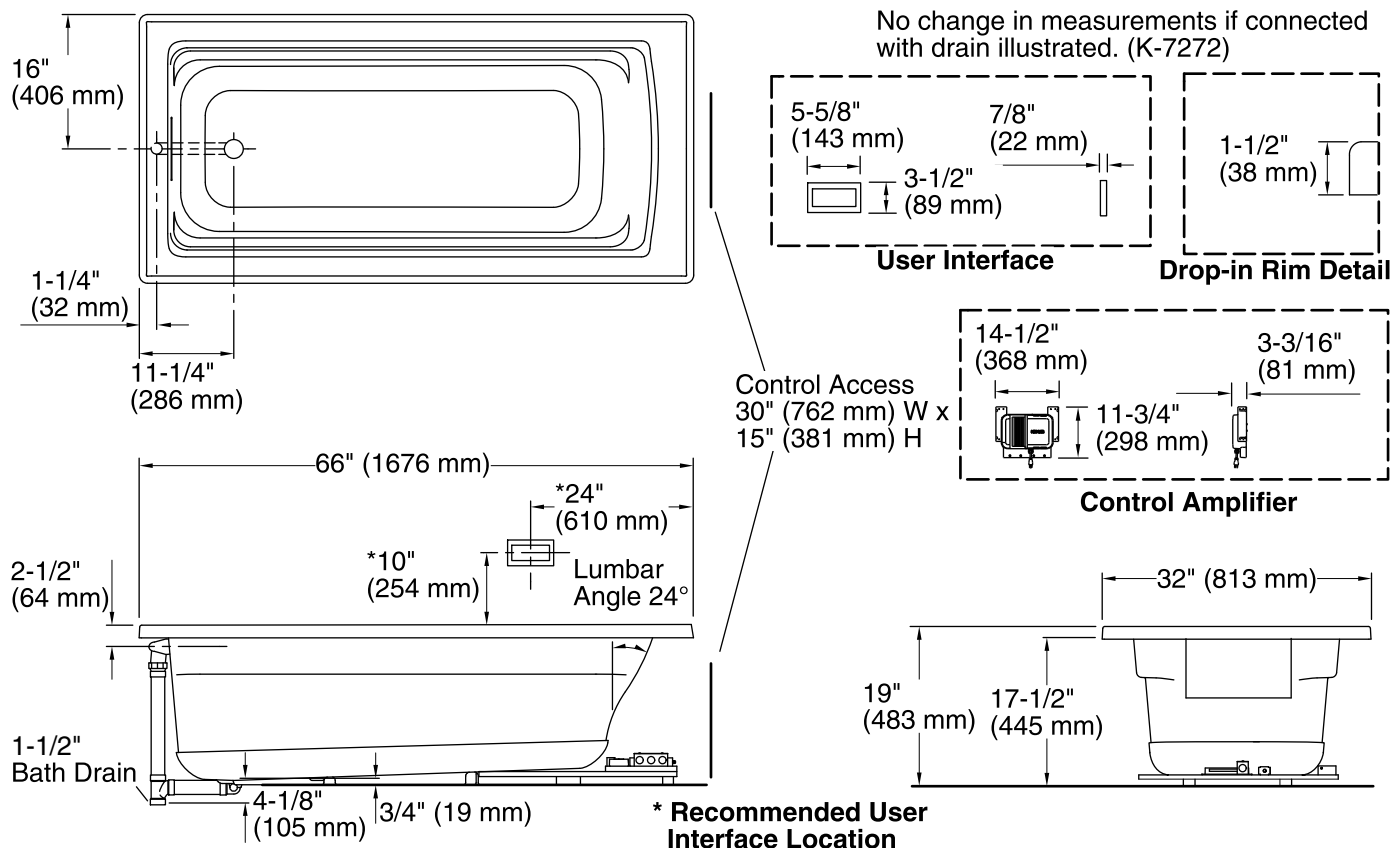

### Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Amplifier, Heated Surface: 120 V, 15 A, 50/60 Hz

### Technical Information

All product dimensions are nominal.

|                              |  |
|------------------------------|--|
| Installation:                | Drop-in  |
| Drain location:              | End  |
| Basin area, bottom:          | 50-3/8" x 19-5/8" (1280 mm x 498 mm)                                       |
| Basin area, top:             | 57-5/16" x 24-1/16" (1456 mm x 611 mm)                                     |
| Weight:                      | 85 lbs (38.6 kg)   |
| Minimum floor load:          | 46 lbs/ft² (224.6 kg/m²)   |
| Water depth:                 | 15-5/16" (389 mm)  |
| Water capacity:              | 66 gal (249.8 L)   |
| Cutout:                      | Drop-in, 64-1/2" x 30-1/2" (1638 mm x 775 mm)                              |
| Electrical component rating: | Amplifier: 120 V, 50/60 Hz<br>Heated Surface: 120 V, 0.5 A, 50/60 Hz, 65 W |
| Minimum flat for door:       | 2-3/16" (55 mm)  |

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

Control amplifier fits 16" (406 mm) center studs. 25' (7.6 m) cables are included.

ADA compliant when installed to the specific requirements of these regulations.