



**Bardon™**  
Touchless Urinal  
**K-2590**

### Features

- Washout urinal.
- 1/2" rear spud.
- Delivers dependable water-saving performance and added hygiene.
- Patented backwall geometry and extended rim, limit splash-back for a cleaner user experience.
- Battery operated Touchless electronic flush valve powered by four AA alkaline batteries.
- Includes tank cover and tank cover locks.
- 0.5 gpf (1.9 lpf)

### Material


- Vitreous china

### Water Conservation & Rebates

- 0.5 gallons per flush.
- ADA-compliant when rim is mounted no higher than 17" from finished floor.
- This product can help a building earn Water Efficiency points in the LEED® Green Building Rating System.

### Components

Additional included component/s: Stop valve assembly, 2" outlet spud, Strainer, Hangers (2), Flush Valve, Tank cover locks (pair), and 4 alkaline AA cell batteries.

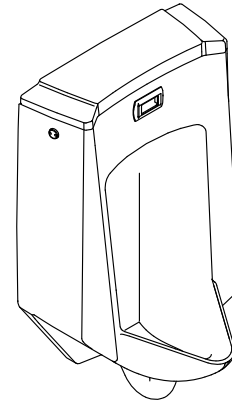

**ADA** **CSA B651** **OBC**

### Codes/Standards


ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

\*Urinal complies with ADA requirements when rim is mounted no higher than 17" (432 mm) from finished floor.

\*Urinal complies with CSA B651 when rim is mounted no higher than 16-7/8" (430 mm) from finished floor.

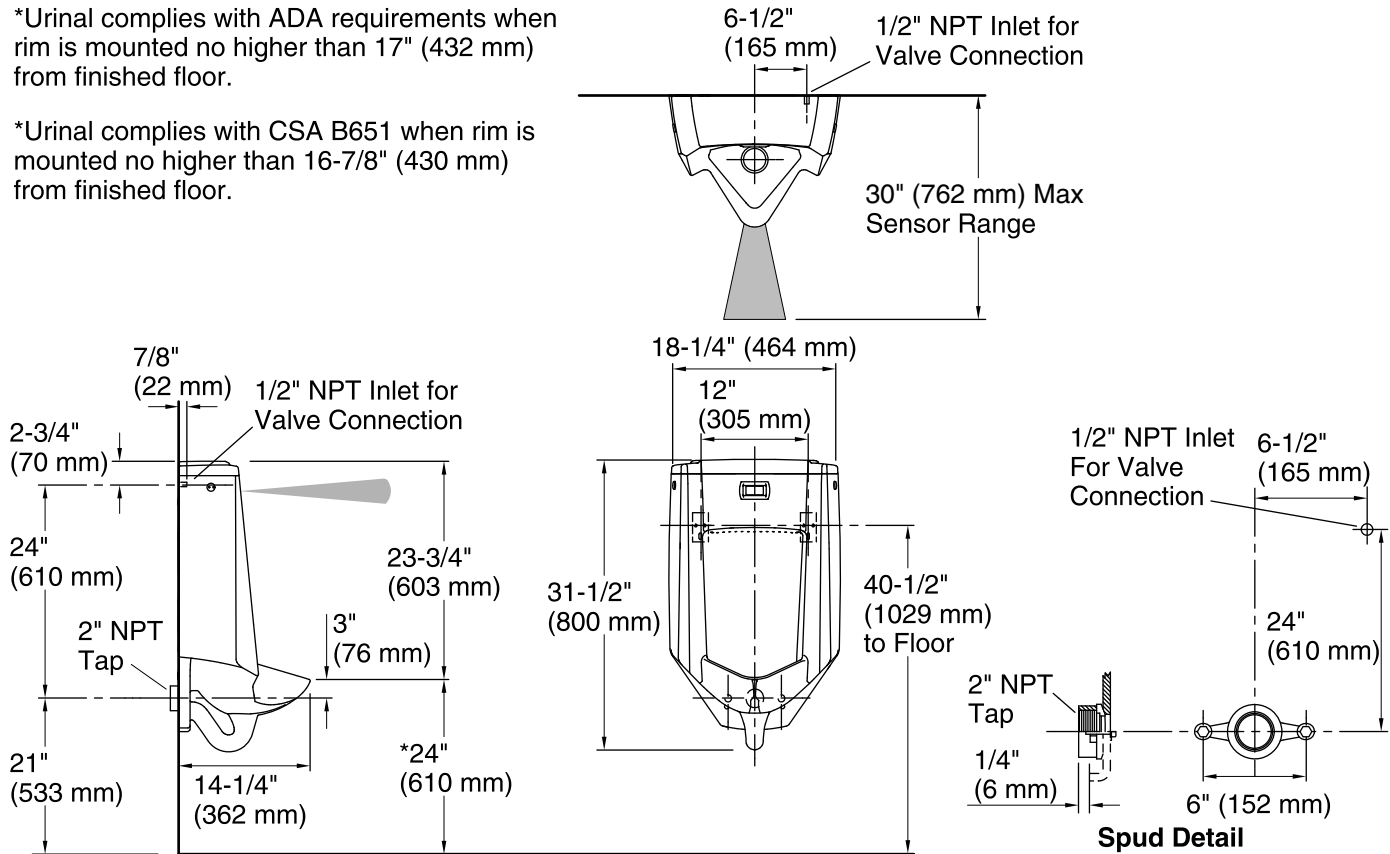

## Technical Information

All product dimensions are nominal.

Flush outlet technology: Washout

Spud size: 1/2", Inlet, Rear

Max. Water per Flush: 0.5 gal (1.9 L)

## Pressure and Supply Requirements

Fixture pressure min 25 psi (172.4 kPa) (static):

Fixture pressure max 80 psi (551.6 kPa) (static):

Power source: AA 1.5 V, included

## Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.