



# Archer®

## 62" VibrAcoustic® Bath

### K-2593-VB



#### Features

- End drain.
- Two-piece design.
- Integral lumbar support and armrests for comfort.
- Slotted overflow for maximum bathing depth
- Textured bottom surface.
- 6 transducers and control amplifier create surround sound experience that gently massages the body
- High-resolution color screen in polished chrome.
- 61-3/4" (1568 mm) x 31-3/4" (806mm) x 22" (559 mm)

#### Material

- Acrylic

#### Hydrotherapy

- VibrAcoustic® technology emits sound waves and offers a surround sound experience.

#### Installation

- Freestanding

#### Required Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

#### Components

Additional included component/s: 25' (7.6 m) cables.



#### Codes/Standards

CSA B45.5/IAPMO Z124

UL 1795

CSA C22.2 No. 218.2

Greenguard UL 2818 - Gold






CARB P2

#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar


USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.



For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com).

1-13-2017 04:49

THE BOLD LOOK  
OF **KOHLER**®

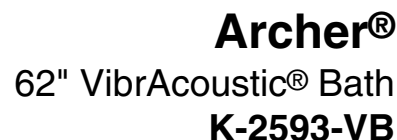

### Faucet Hole Locations (For KOHLER® Brand Only)

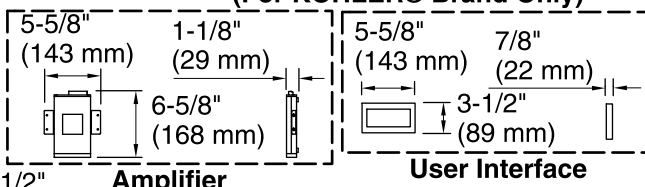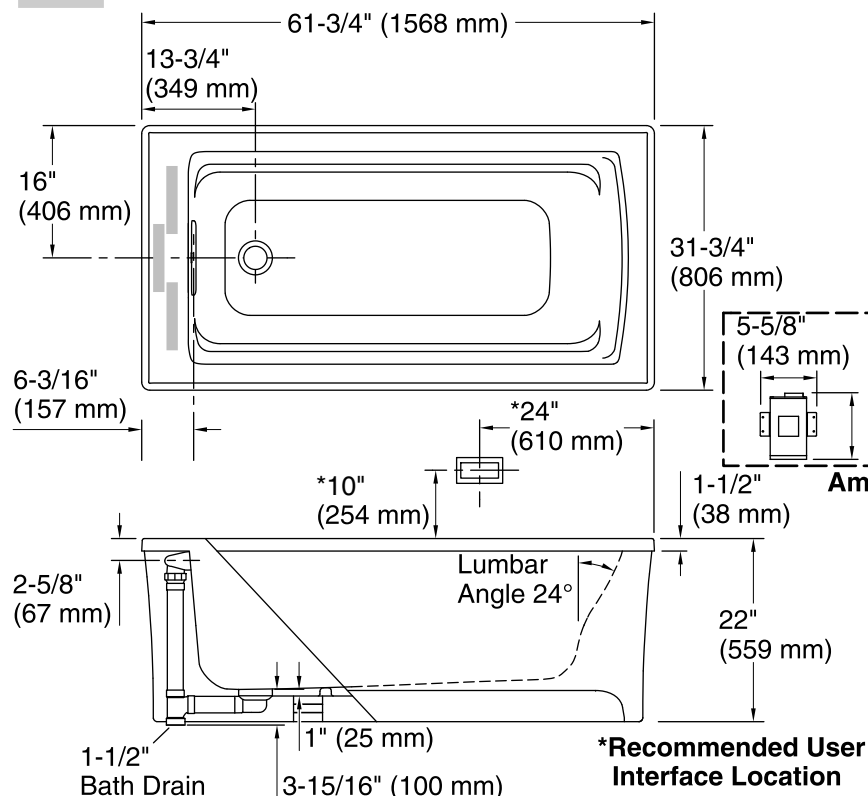

## Notes

Measure your actual product for rough-in details.  
Install this product according to the installation  
instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

Control amplifier fits 16" (406 mm) center studs.

Drain location:                      End

Basin area, bottom: 45-1/8" x 19-11/16" (1147 mm x 500 mm)

Basin area, top: 52-3/4" x 25-5/16" (1339 mm x 643 mm)

Weight: 90 lbs (40.8 kg)

Minimum floor load: 43.5 lbs/ft<sup>2</sup> (212.4 kg/m<sup>2</sup>)

Water depth: 15-1/16" (383 mm)

Water capacity: 58 gal (219.6 L)

Template: Footprint, 1265460, not required, not included

Electrical component rating: Amplifier: 120 V, 15 A, 60 Hz

duct specifications.

THE BOLD LOOK  
OF **KOHLER**