

## Features

- Vitreous china.
- Elongated bowl
- Equipped with Sloan FLUSHMATE®- Sloan® Valve Company.
- Polished chrome trip lever.
- Less seat and supply.
- 12" (305 mm) rough-in.
- 1.0 gpf (3.8 lpf).
- 2-1/4" (57 mm) glazed trapway.
- 11-1/2" (292 mm) x 9-1/2" (241 mm) water area.
- 30-1/8" (765 mm) x 21-1/4" (540 mm) x 31-1/4" (794 mm).

## **Optional Accessories**

K-4650 Toilet Seat K-7637 Angle Supply with Stop (single) K-9481-L Left-hand Trip Lever

## Components

Product includes: K-4304 Toilet Bowl K-4484-RA Toilet Tank Additional included component/s: Tank cover, and Trip lever.





## Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

## KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.

## Available Color/Finishes

Color tiles intended for reference only.

#### Color Code Description






# Highline<sup>®</sup> Pressure Lite<sup>®</sup> Toilet K-3519-RA



Pressure Lite<sup>®</sup> Toilet

## K-3519-RA

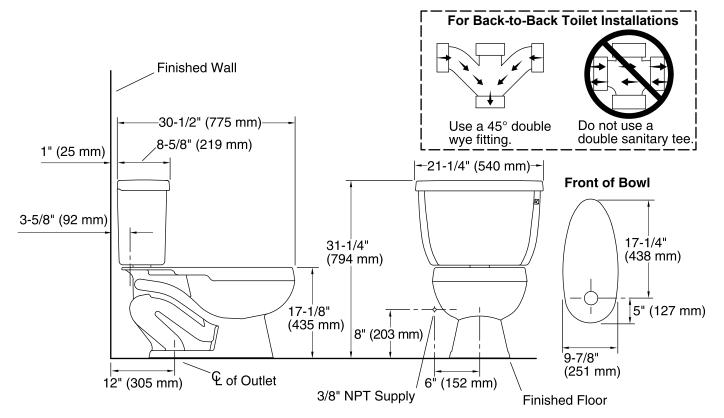

## **Technical Information**

**KOHLER** 

All product dimensions are nominal.

Toilet type:	Two-piece, Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated front
Flush type:	Pressure Assisted
Trap passageway:	2-1/4" (57 mm)
Water surface size:	11-1/2" x 9-1/2" (292 mm x 241 mm)
Rim to water surface:	5-3/4" (146 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

#### **Fixture Supply Requirements**

Min static pressure:	35 psi (241.3 kPa)
Max static pressure:	80 psi (551.6 kPa)

#### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a  $45^{\circ}$  double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.

