

## Features

- Vitreous china.
- Required minimum 12" (305 mm) rough-in.
- One-piece.
- Elongated bowl.
- Available with KOHLER Artist Editions designs.
- Dual flush flushing system.
- High efficiency 1.6 gpf (6.0 lpf) or 0.8 gpf (3.0 lpf).
- 2-1/8" (54 mm) fully glazed trapway.
- Skirted bowl design.
- Includes Saile seat and cover [K-4748] and polished chrome top-mount flush actuator.
- Less supply.
- 28-1/2" (724 mm) x 14-1/4" (362 mm) x 28-3/4" (730 mm).

## Optional Accessories

K-4108 Toilet Seat with Cleansing Functionality  
K-4636 Toilet Seat  
K-4652 Toilet Seat  
K-4659 Toilet Seat  
K-4684 Toilet Seat  
K-4688 Toilet Seat  
K-4709 Toilet Seat with Cleansing Functionality  
K-4713 Toilet Seat  
K-4732 Toilet Seat  
K-4733 Toilet Seat  
K-4737 Toilet Seat with Cleansing Functionality  
K-4748 Toilet Seat  
K-4774 Toilet Seat  
K-4814 Toilet Seat  
K-4888 Elongated Toilet Seat  
K-5588 Elongated Toilet Seat  
K-5638 Elongated Toilet Seat  
K-7637 Angle Supply with Stop (single)  
K-9384 Dual-flush Actuator  
K-4761-BN Toilet Seat  
K-4761-CP Toilet Seat

## Components

Product includes:

K-4748 Toilet Seat

Additional included component/s: Tank cover, Dual flush push buttons, Installation kit, Installation template, and Tank accessory pack.



## Codes/Standards




ASME A112.19.2/CSA B45.1  
ASME A112.19.14  
DOE - Energy Policy Act 1992  
EPA WaterSense®


## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

## Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond

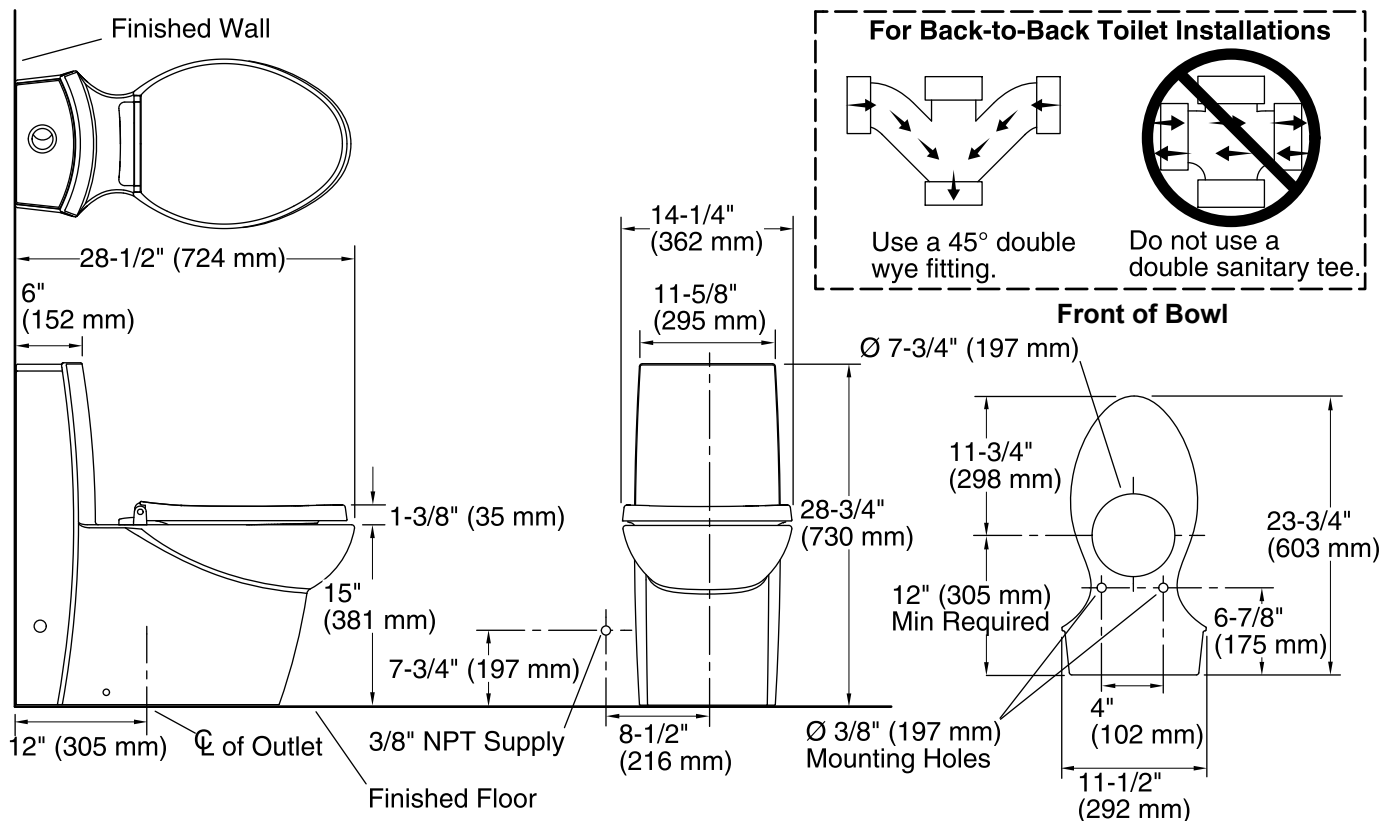

## Technical Information

All product dimensions are nominal.

Toilet type:	One-piece, Wall-mount
Bowl shape:	Compact Elongated front
Seat hinge type:	Quick-Release™, Quick-Attach®
Trap passageway:	2-1/8" (54 mm)
Water Consumption	
Full:	1.6 gpf (6 lpf)
Reduced:	0.8 gpf (3 lpf)
Water surface size:	4-1/8" x 5-1/8" (105 mm x 130 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

## Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.