

Wellworth®

Class Five® Toilet

K-3577-T

Features

- Vitreous china.
- Two-piece toilet.
- Regular height Round-front bowl.
- Class Five® flushing system.
- Includes left-hand polished chrome trip lever.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) fully glazed trapway.
- 12" (305 mm) rough-in.
- Less seat and supply.
- 10-1/2" (267 mm) x 7-3/4" (197 mm) water area.
- 27-1/2" 699 mm) x 19-5/8" (498 mm) x 28-1/4" (718 mm).
- Floor mount / Floor outlet.
- Tank cover locks included.

Optional Accessories

K-4009 Toilet Seat

K-4639 Toilet Seat

K-4644 Toilet Seat

K-4662 Toilet Seat

K-4663 Toilet Seat

K-4689 Toilet Seat

K-4695 Toilet Seat

K-4775 Toilet Seat

K-4816 Toilet Seat

K-5589 Round-Front Toilet Seat

K-5639 Round-Front Toilet Seat

K-7637 Angle Supply with Stop (single)

K-4686-A Toilet Seat

K-4716-T Toilet Seat

K-9380-L Left-hand Trip Lever

Components

Product includes:

K-4197 Round-Front Bowl

K-4436-T Toilet Tank

Additional included component/s: Tank cover, Trip lever, Bolt cap accessory pack, and Tank accessory pack.

Certified by IAPMO R&T



ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense®

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
14 15	7	Black Black™





KOHLER®

Class Five® Toilet K-3577-T

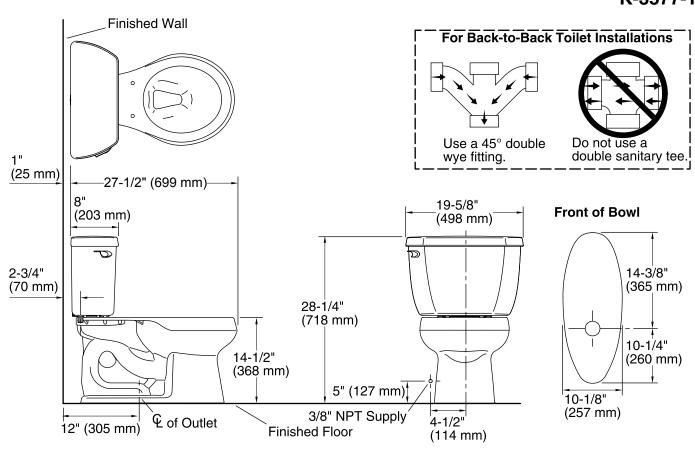

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Round front
Flush type: Class Five
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 10-1/2" x 7-3/4" (267 mm x 197 mm)

Rim to water surface: 5-1/4" (133 mm)
Rough-in: 12" (305 mm)
Seat-mounting holes: 5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

