KOHLER_®

Features

- Elongated bowl.
- 1.6 gpf (6.1 lpf).
- Left-hand trip lever.
- 2-1/8" (54 mm) glazed trapway.
- 28-3/4" (730 mm) x 17-5/8" (447 mm) x 30-3/4" (781 mm).

Material

Vitreous china.

Technology

• AquaPiston[®] flushing system.

Required Accessories

ADA

K-4650-A Toilet Seat

Optional Accessories

K-1954 Touchless Toilet Flush Kit K-4008 Toilet Seat K-4108 Toilet Seat with Cleansing Functionality K-4650 Toilet Seat K-4652 Toilet Seat K-4659 Toilet Seat K-4660 Toilet Seat K-4684 Toilet Seat K-4688 Toilet Seat K-4694 Toilet Seat K-4709 Toilet Seat with Cleansing Functionality K-4713 Toilet Seat K-4732 Toilet Seat K-4733 Toilet Seat K-4737 Toilet Seat with Cleansing Functionality K-4748 Toilet Seat K-4774 Toilet Seat K-4814 Toilet Seat K-4888 Elongated Toilet Seat K-5588 Elongated Toilet Seat K-7637 Angle Supply with Stop (single) K-4712-T Toilet Seat K-4761-BN Toilet Seat K-4761-CP Toilet Seat K-9466-L Left-hand Trip Lever K-9470-L Left-hand Trip Lever K-4636 Toilet Seat

Components

Product includes: K-4309 Elongated Toilet Bowl K-4418 Toilet Tank Additional included component/s: Tank cover, Trip lever, Tank accessory pack, and Bolt cap accessory pack.



Cimarron®

K-3589

Comfort Height® Toilet



Codes/Standards

ASME A112.19.2/CSA B45.1 ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

0	White
96	Biscuit
47	Almond
NY	Dune
95	lce™ Grey
60	Sandhar


- G9 Sandbar
- 7 Black Black™





Cimarron®

Comfort Height® Toilet K-3589

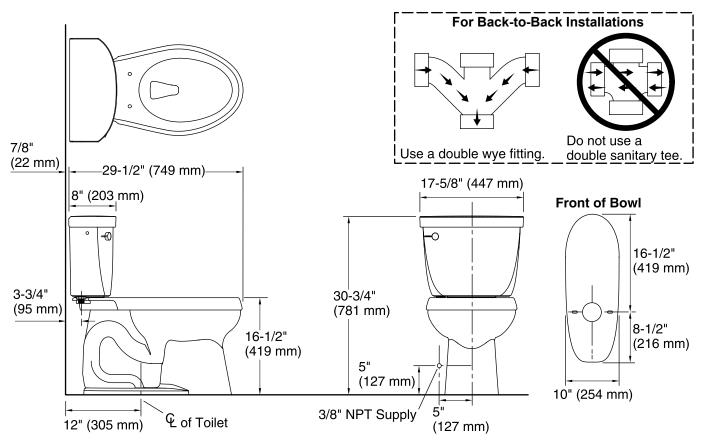

Technical Information

All product dimensions are nominal.		
Toilet type:	Two-piece, Floor-mount	
Bowl shape:	Elongated front	
Flush type:	AquaPiston	
Trap passageway:	2-1/8" (54 mm)	
Water Consumption		
Full:	1.6 gpf (6 lpf)	
Water surface size:	10-1/2" x 7-1/8" (267 mm x 181 mm)	
Rim to water surface:	6-1/8" (156 mm)	
Rough-in:	12" (305 mm)	
Seat-mounting holes:	5-1/2" (140 mm)	

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.

