

Comfort Height[™] Elongated Toilet **K-3597**

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Elongated bowl offers added room and comfort.
- Comfort Height[®] feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.0 gallon per flush (gpf).

KOHLER

- Equipped with Sloan Flushmate® Pressure Vessel.
- Seat and lid included.
- Supply line not included.

Technology

 Pressure Lite[®] flushing technology provides commercial-grade flushing power while reducing water use.

Installation

• Standard 12-inch rough-in.

Water Conservation & Rebates

- WaterSense[®] toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.
- This product can help a building earn Water Efficiency points in the LEED[®] Green Building Rating System.

Recommended Accessories

K-7637 Angle Supply with Stop (single)

Optional Accessories

K-4650 Toilet Seat

Components

Additional included component/s: Tank Cover, Bolt Cap Accessory Pack, Toilet Seat, and Tank Accessory Pack.





ADA

Codes/Standards ASME A112.19.2/CSA B45.1 EPA WaterSense® California Energy Commission (CEC) ADA OBC

Kohler One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Riccuit


- 96 Biscuit
- 47 Almond
- NY Dune
- 95 Ice™ Grey
- G9 Sandbar
- 58 Thunder™ Grey
- 7 Black Black™





San Raphael®

Comfort Height[™] Elongated Toilet K-3597

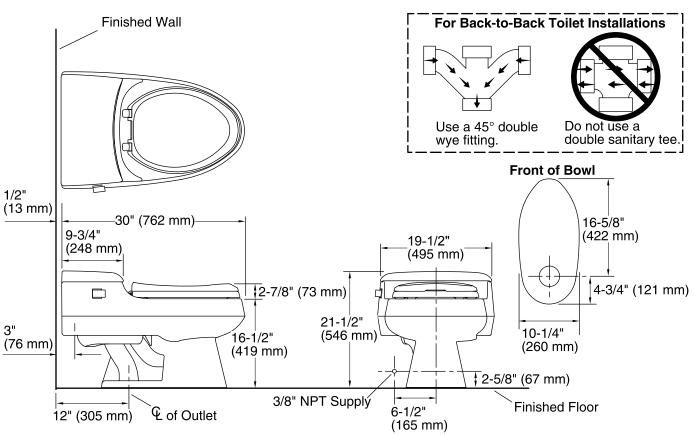

Technical Information

All product dimensions are nominal.			
Toilet type:	One-piece		
Bowl shape:	Elongated front		
Trap passageway:	2-1/8" (54 mm)		
Water Consumption			
Full:	1 gpf (3.8 lpf)		
Water surface size:	9" x 7" (229 mm x 178 mm)		
Rim to water surface:	5-7/8" (149 mm)		
Rough-in:	12" (305 mm)		
Seat-mounting holes:	5-1/2" (140 mm)		

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.

Fixture Supply Requirements

Min static pressure: 35 psi (241.3 kPa)

