

### Features

- Vitreous china.
- Two-piece toilet.
- Regular height Elongated bowl.
- Dual Flush flushing system.
- Includes top-mount dual flush actuator.
- 1.6 gpf (6.0 lpf) or 1.0 gpf (3.8 lpf).
- Fully skirted trapway.
- 12" (305 mm) rough-in.
- Seat not included.
- Supply line included.
- 4-1/2" (114 mm) x 5-3/4" (146 mm) water area.
- 28" (711 mm) x 14-3/16" (360 mm) x 31-1/2" (800 mm).
- Floor mount / Floor outlet.
- Coordinates with other products in the Persuade collection.

### Technology

- Dual-flush technology allows you to choose between a full- or partial-flush.

### Optional Accessories

K-4774 Toilet Seat  
K-7637 Angle Supply with Stop (single)  
K-7659 Angle Stop  
K-7668 Straight Stop  
K-9384 Dual-flush Actuator  
K-4761-BN Toilet Seat  
K-4761-CP Toilet Seat

### Components

Product includes:

K-4322 Toilet Bowl  
K-4419 Toilet Tank

Additional included component/s: Tank cover, Dual flush actuator buttons, Installation kit, Installation template, Tank accessory pack, and Supply line.




### Codes/Standards

ASME A112.19.2/CSA B45.1  
ASME A112.19.14  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

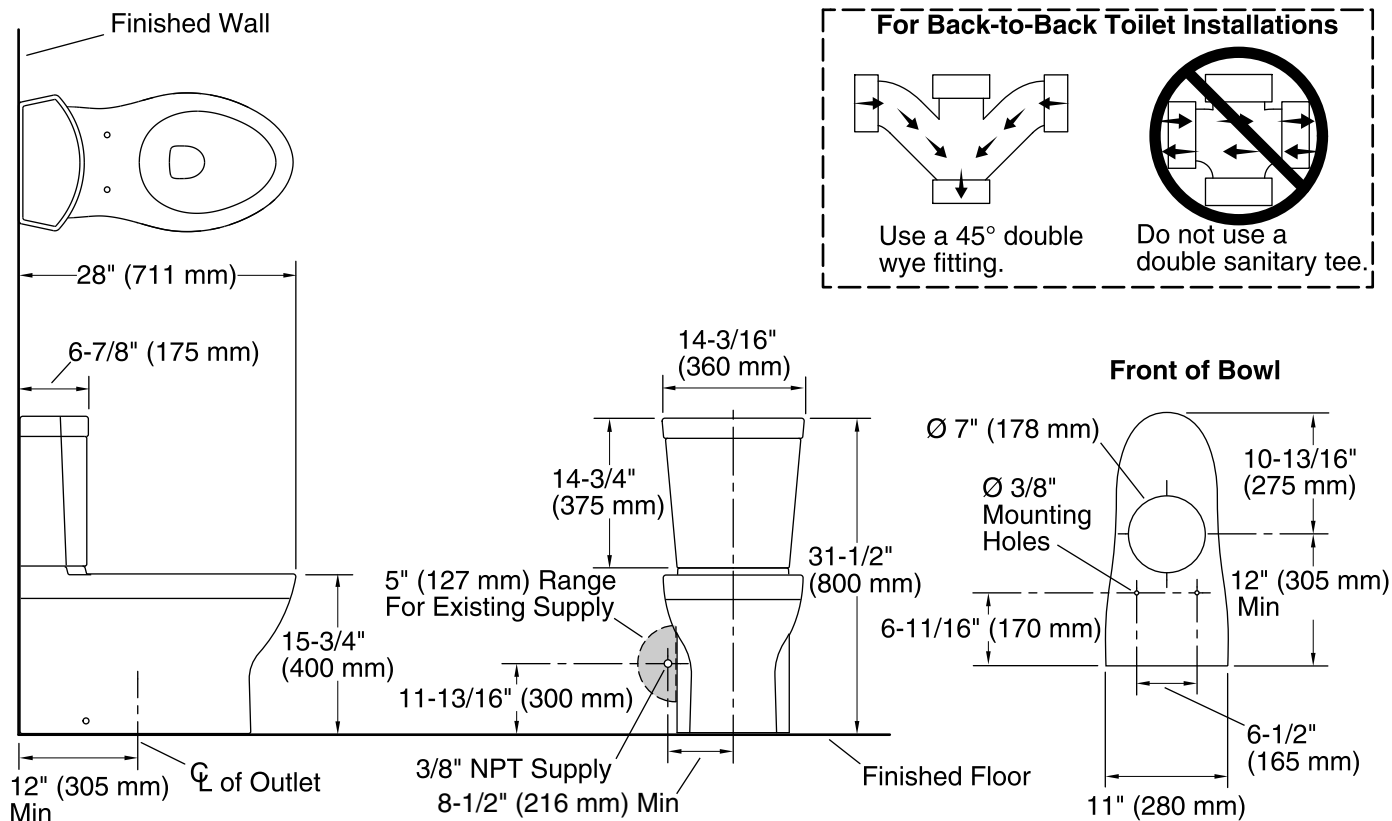

## Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated front

Trap passageway: 2" (51 mm)

## Water Consumption

Full: 1.6 gpf (6 lpf)

Reduced: 1 gpf (3.8 lpf)

Water surface size: 4-1/2" x 5-3/4" (114 mm x 146 mm)

Rim to water surface: 8-1/2" (216 mm)

Rough-in: 12" (305 mm)

Seat-mounting holes: 5-1/2" (140 mm)

## Notes

Install this product according to the installation instructions.

**IMPORTANT!** The rough-in must be 12" (305 mm) or more from the base of the wall or baseboard. The base of the toilet fits tightly against the wall or baseboard. The toilet will not fit correctly if there is less than 12" (305 mm) of clear space between the base of the wall or baseboard and the centerline of the outlet. Install or relocate the supply and outlet as necessary to conform to rough-in dimensions.

NOTE: If a baseboard causes the rough-in to be less than 12" (305 mm), it must be cut or removed to allow space for the toilet.

If this toilet is installed in new construction, install a new supply stop following the dimensions in the diagram.

In installations with the supply stop installed, the existing supply stop may need to be relocated if it is less than 8-1/2" (216 mm) from the centerline of the toilet. Dry fit the toilet to confirm if the supply stop needs to be relocated.