KOHLER_®

Features

- Vitreous china.
- Elongated bowl.
- AquaPiston[®] flushing system.
- One-piece.
- Includes seat and cover.
- Includes trip lever.
- Less supply.
- 1.28 gpf (4.8 lpf).
- 12" (305 mm) rough-in.
- 2-1/8" (54 mm) glazed trapway.
- 11" (279 mm) x 8-3/4" (222 mm) water area.
- 28-1/8" (714 mm) x 18-1/4" (464 mm) x 28-1/2" (724 mm).

Optional Accessories

K-4650 Toilet Seat K-9167-L Trip Lever K-1954 Touchless Toilet Flush Kit K-4008 Toilet Seat K-4636 Toilet Seat K-4652 Toilet Seat K-4659 Toilet Seat K-4684 Toilet Seat K-4688 Toilet Seat K-4694 Toilet Seat K-4709 Toilet Seat with Cleansing Functionality K-4732 Toilet Seat K-4733 Toilet Seat K-4737 Toilet Seat with Cleansing Functionality K-4748 Toilet Seat K-4774 Toilet Seat K-4814 Toilet Seat K-4888 Elongated Toilet Seat K-5588 Elongated Toilet Seat K-5638 Elongated Toilet Seat K-7637 Angle Supply with Stop (single) K-4712-T Toilet Seat K-4761-BN Toilet Seat K-4761-CP Toilet Seat

Components

Product includes: K-4733 Toilet Seat Additional included component/s: Tank cover, Trip lever, Bolt cap accessory pack, and Tank accessory pack.

Memoirs® Comfort Height® Toilet K-3813





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER[®] One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color Code Description 0 White 96 Biscuit 47 Almond NY Dune Ice[™] Grey 95 G9 Sandbar 33 Mexican Sand™ K4 Cashmere 58 Thunder[™] Grey 7 Black Black[™]





Memoirs® Comfort Height® Toilet K-3813

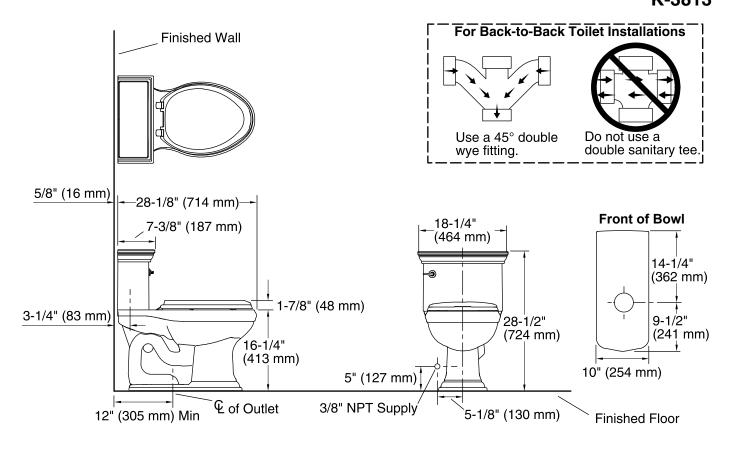

Technical Information

All product dimensions are nominal.	
Toilet type:	One-piece, Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated front
Flush type:	AquaPiston
Seat hinge type:	Quiet-Close™, Quick-Release™
Trap passageway:	2-1/8" (54 mm)
Water Consumption	
Full:	1.28 gpf (4.8 lpf)
Water surface size:	11" x 8-3/4" (279 mm x 222 mm)
Rim to water surface:	6" (152 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.

