

# **Memoirs®**

Comfort Height® Toilet K-3986-U

#### **Features**

- Vitreous china.
- Two-piece toilet.
- Comfort Height® Round-front bowl.
- AquaPiston® flushing system.
- Includes left-hand polished chrome trip lever.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) fully glazed trapway.
- 12" (305 mm) rough-in.
- Less seat and supply.
- 11-1/2" (292 mm) x 8-3/4"(222 mm) water area.
- 28-3/8" (721 mm) x 17-13/16" (452 mm) x 31-1/2" (800 mm).
- Floor mount / Floor outlet.
- Insuliner® tank liner included.

### **Optional Accessories**

K-4009 Toilet Seat

K-4639 Toilet Seat

K-4644 Toilet Seat

K-4662 Toilet Seat

K-4663 Toilet Seat

K-4689 Toilet Seat

K-4695 Toilet Seat

K-4775 Toilet Seat

K-4816 Toilet Seat

K-5589 Round-Front Toilet Seat

K-5639 Round-Front Toilet Seat

K-7637 Angle Supply with Stop (single)

K-7671 Toilet Seat

K-7673 Round-Front Toilet Seat

K-4662-A Toilet Seat

K-4686-A Toilet Seat

K-4716-T Toilet Seat

#### Components

Product includes:

K-4387 Round-Front Bowl

K-4433-U Toilet Tank

Additional included component/s: Tank cover, Trip lever, Bolt

cap accessory pack, and Tank accessory pack.





### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense®

## **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### **Available Color/Finishes**

Color Code Description

Color tiles intended for reference only.

00.0.	Oodo	Docomption
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
100	G9	Sandbar
413	7	Black Black™






## **Memoirs®**

# Comfort Height® Toilet

K-3986-U

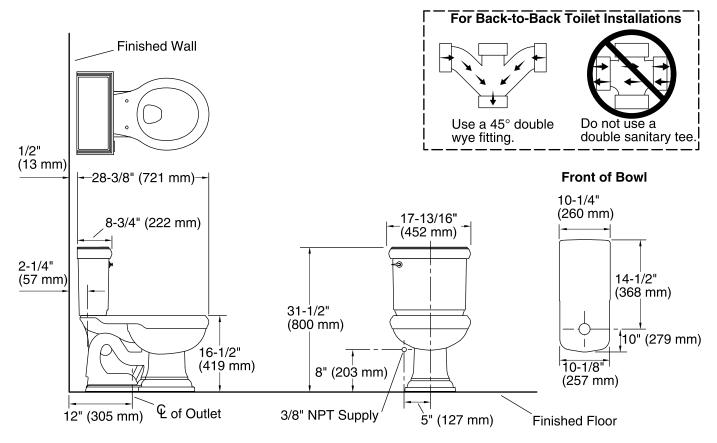

### **Technical Information**

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Round front
Flush type: AquaPiston
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 11-1/2" x 8-3/4" (292 mm x 222 mm)

Rim to water surface: 6-1/8" (156 mm)

Rough-in: 12" (305 mm)

Seat-mounting holes: 5-1/2" (140 mm)

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

