

Wellworth® Class Five® Dual Flush Toilet K-3987-RA

Features

- Two-piece toilet.
- Round-front bowl offers an ideal solution for smaller baths and powder rooms.
- Right-hand nested trip lever offers a choice of 1.1 or 1.6 gallons per flush (gpf).
- 2-1/8-inch glazed trapway.
- Coordinates with other products in the Wellworth collection.

Technology

 Dual-flush technology allows you to choose between a full- or partial-flush.

Installation

- Standard 12-inch rough-in.
- Three-bolt installation.

Water Conservation & Rebates

- WaterSense[®] toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.

Optional Accessories

K-4639 Toilet Seat K-4689 Toilet Seat K-7637 Angle Supply with Stop (single)

Components

Product includes: K-4458-RA Dual-Flush Tank K-4197 Round-Front Bowl K-9236 Trip Lever Dual Flush Additional included component/s: Bowl, Tank, Tank cover, Trip lever, and Bolt cap accessory pack.





Codes/Standards ASME A112.19.2/CSA B45.1 ASME A112.19.14 EPA WaterSense®

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

0	White
96	Biscuit
47	Almond




KOHLER_®

Wellworth®

Class Five® Dual Flush Toilet

K-3987-RA

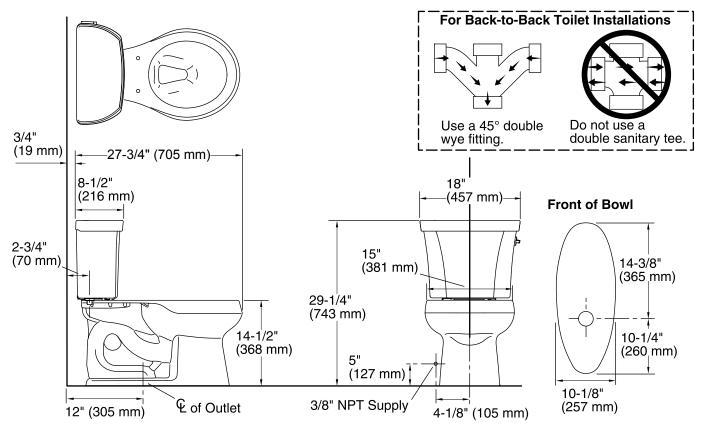

Technical Information

All product dimensions are nominal.			
Toilet type:	Two-piece, Floor-mount		
Waste Outlet:	Floor		
Bowl shape:	Round front		
Flush type:	Class Five		
Trap passageway:	2-1/8" (54 mm)		
Water Consumption			
Full:	1.6 gpf (6 lpf)		
Reduced:	1.1 gpf (4.3 lpf)		
Water surface size:	10-1/2" x 7-3/4" (267 mm x 197 mm)		
Rim to water surface:	5-1/4" (133 mm)		
Rough-in:	12" (305 mm)		
Seat-mounting holes:	5-1/2" (140 mm)		

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

