

## Features

- Vitreous china.
- Elongated bowl.
- Siphon jet.
- Wall-mount.
- 1-1/2" rear spud.
- 1.28 gpf (4.8 lpf) or 1.6 gpf (6 lpf) depending on flushometer specified.
- 10-1/2" (267 mm) x 9" (229 mm) water area.
- 26-1/2" (673 mm) x 16-1/2" (419 mm) x 13-1/4" (337 mm).

## Optional Accessories

K-4731-C Commercial Heavy-duty Toilet Seat  
K-4731-GC Commercial Heavy-duty Toilet Seat  
K-4731-SC Commercial Heavy-duty Toilet Seat

## Components

Additional included component/s: Spud.



**ADA** **CSA B651**

## Codes/Standards





ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651



## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

## Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	7	Black Black™

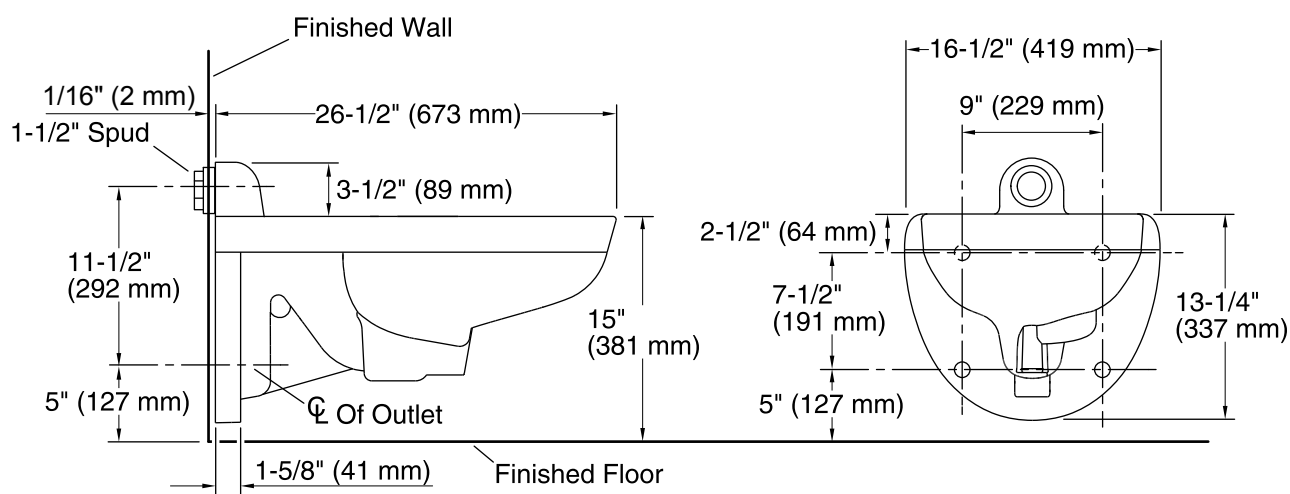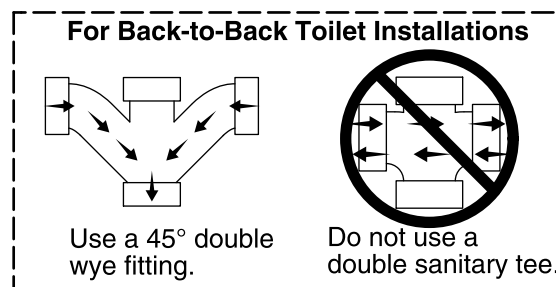

## Technical Information

All product dimensions are nominal.

Toilet type: Flushometer, Wall-mount

Waste Outlet: Wall

Flush type: Siphon jet

Spud size: 1-1/2", Inlet, Rear

Trap passageway: 2-1/8" (54 mm)

Water surface size: 10-1/2" x 9" (267 mm x 229 mm)

Rim to water surface: 5-1/4" (133 mm)

Seat-mounting holes: 5-1/2" (140 mm)

## Fixture Supply Requirements

Min static pressure: 35 psi (241.3 kPa)

Max static pressure: 80 psi (551.6 kPa)

Min flowing pressure: 25 psi (172.4 kPa)

Min flow rate: 25 gpm (94.6 lpm)

## Notes

Install this product according to the installation instructions.

Refer to manufacturer's instructions and local codes for flushometer requirements.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.